

NIST Technical Note 2032

Building for Environmental and Economic Sustainability (BEES) Online 2.0 Technical Manual

Joshua Kneifel
Anne Landfield Greig
Priya Lavappa
Brian Polidoro

This publication is available free of charge from:
<https://doi.org/10.6028/NIST.TN.2032>

BEES
online



NIST
National Institute of
Standards and Technology
U.S. Department of Commerce

NIST Technical Note 2032

Building for Environmental and Economic Sustainability (BEES) Online 2.0 Technical Manual

Joshua Kneifel
Priya Lavappa
Brian Polidoro
*Applied Economics Office
Engineering Laboratory*

Anne Landfield Greig
Four Elements Consulting, LLC

This publication is available free of charge from:
<https://doi.org/10.6028/NIST.TN.2032>

December 2018



U.S. Department of Commerce
Wilbur L. Ross, Jr., Secretary

National Institute of Standards and Technology
Walter Copan, NIST Director and Under Secretary of Commerce for Standards and Technology

Certain commercial entities, equipment, or materials may be identified in this document in order to describe an experimental procedure or concept adequately. Such identification is not intended to imply recommendation or endorsement by the National Institute of Standards and Technology, nor is it intended to imply that the entities, materials, or equipment are necessarily the best available for the purpose.

National Institute of Standards and Technology Technical Note 2032
Natl. Inst. Stand. Technol. Tech. Note 2032, 224 pages (December 2018)
CODEN: NTNOEF

This publication is available free of charge from:
<https://doi.org/10.6028/NIST.TN.2032>

Abstract

Building stakeholders need practical metrics, data, and tools to support decisions related to sustainable building product selection. The Engineering Laboratory of the National Institute of Standards and Technology (NIST) has addressed this national need by developing a new version of its metrics and tools for sustainable building products, known as Building for Environmental and Economic Sustainability (BEES) Online. BEES Online 2.0 implements the same BEES framework using metrics based on process-based life-cycle assessment (LCA) and life-cycle costing (LCC) approaches to assess the environmental and economic performance of building products. BEES Online 2.0 includes a more user-friendly interface with more expansive user customization, options, and guidance. The existing products in BEES Online 1.0 (and new products) are in the process of being transitioned to BEES Online 2.0, including updating the LCA and LCC results using up-to-date methodologies and data sources, with focus on the largest and most widely viewed product categories.

Keywords

Building economics; life cycle costing; life cycle assessment; life cycle impact assessment; residential buildings; commercial buildings; sustainability; green buildings

Preface

This documentation was developed by the Applied Economics Office (AEO) in the Engineering Laboratory (EL) at the National Institute of Standards and Technology (NIST). The document explains how the BEES database was developed, including the assumptions and data sources. The intended audience is BEES users, researchers and decision makers in the building sector, and others interested in building sustainability.

Disclaimers

The policy of the National Institute of Standards and Technology is to use metric units in all its published materials. Because this report is intended for the U.S. construction industry that uses U.S. customary units, it is more practical and less confusing to include U.S. customary units as well as metric units. Measurement values in this report are therefore stated in metric units first, followed by the corresponding values in U.S. customary units within parentheses.

Acknowledgements

The BEES tool could not have been completed without the help of others. Thanks are due the NIST Engineering Laboratory (EL) for its support of this work.

The EPA Office of Research and Development, Sustainable Technology Division TRACI team were instrumental in developing the life cycle impact assessment methods incorporated into BEES. The author is particularly grateful for the key cooperation and support offered by a wide variety of industry associations and manufacturers with products represented in BEES. Their cooperation exceeded all expectations and led to a significant expansion and refinement of the underlying BEES performance data.

The authors wish to thank all those who contributed ideas and suggestions for this report. They include David Webb and Dr. David Butry of EL's Applied Economics Office, Dr. William Healy of EL's Energy and Environment Division, and Dr. Nicos S. Martys of EL's Materials and Structural Systems Division.

Author Information

Joshua Kneifel
Economist
National Institute of Standards and Technology
Engineering Laboratory
100 Bureau Drive, Mailstop 8603
Gaithersburg, MD 20899 8603
Tel.: 301-975-6857
Email: joshua.kneifel@nist.gov

Priya Lavappa
Computer Specialist
National Institute of Standards and Technology
Engineering Laboratory
100 Bureau Drive, Mailstop 8603
Gaithersburg, MD 20899 8603
Tel.: 301-975-4522
Email: priya.lavappa@nist.gov

Brian Polidoro
Computer Specialist
National Institute of Standards and Technology
Engineering Laboratory
100 Bureau Drive, Mailstop 8633
Gaithersburg, MD 20899 8633
Tel.: 301-975-6445
Email: brian.polidoro@nist.gov

Anne Landfield Greig
Principal
Four Elements Consulting, LLC
Seattle, WA
Tel: 206-935-4600
Email: anne@fourelementsllc.com

Contents

Abstract.....	i
Preface.....	ii
Acknowledgements.....	iii
Author Information.....	iv
Contents.....	v
List of Acronyms.....	xiii
1 Introduction to BEES.....	1
1.1 BACKGROUND.....	1
1.2 BEES MODEL.....	1
1.3 NOTABLE CHANGES IN BEES ONLINE 2.0.....	2
1.4 SUBMISSION PROCESS TO BEES ONLINE 2.0.....	5
2 Environmental Performance.....	7
2.1 GOAL AND SCOPE DEFINITION.....	8
2.2 INVENTORY ANALYSIS.....	10
2.3 LIFE CYCLE IMPACT ASSESSMENT.....	11
2.4 IMPACT INTERPRETATION.....	24
3 Economic Performance.....	33
3.1 STUDY PERIOD.....	33
3.2 LIFE CYCLE COSTING.....	34
3.3 DISCOUNT RATE.....	34
3.4 COST OF CARBON.....	35
3.5 DEFAULT COST DATA SOURCES.....	38
4 BEES Product Summary.....	39
4.1 UNIFORMAT II.....	39
4.2 BEES PRODUCT CATEGORIES.....	39
5 Floor Coverings Category.....	43
5.1 FLOOR COVERING TYPES.....	43
5.2 FLOOR COVERING CHARACTERISTICS AND CERTIFICATIONS.....	43
5.3 FLOOR COVERING INSTALLATION, SERVICE LIFE, AND USE PHASE.....	44
5.4 ARMSTRONG RESILIENT FLOOR COVERINGS.....	45
5.5 FORBO PRODUCTS.....	53
5.6 TANDUS CENTIVA COMMERCIAL CARPET.....	61
5.7 AVERAGE CERAMIC TILE.....	68
5.8 AVERAGE VINYL COMPOSITION TILE (VCT).....	72
5.9 CORK FLOORING.....	77
5.10 GENERIC COMPOSITE MARBLE TILE.....	81
5.11 GENERIC HARDWOOD FLOORING.....	86
5.12 GENERIC NYLON CARPET.....	94
5.13 GENERIC POLYESTER (PET) BROADLOOM CARPET.....	99
5.14 GENERIC TERRAZZO.....	104
5.15 GENERIC WOOL CARPET.....	109
6 Exterior Wall Finish Category.....	117
6.1 EXTERIOR WALL FINISH TYPES.....	117
6.2 EXTERIOR WALL FINISH CHARACTERISTICS AND CERTIFICATIONS.....	117
6.3 EXTERIOR WALL FINISH INSTALLATION, SERVICE LIFE, AND USE PHASE.....	117
6.4 GENERIC STUCCO CLADDING.....	118
6.5 DRYVIT SYSTEMS CLADDING PRODUCTS.....	123

6.6	CERTAINEED SIDING PRODUCTS.....	129
6.7	GENERIC VINYL SIDING AND INSULATED VINYL SIDING.....	140
6.8	GENERIC ALUMINUM SIDING.....	146
6.9	GENERIC BRICK.....	150
6.10	GENERIC CEDAR SIDING.....	154
6.11	GENERIC POLYPROPYLENE (PP) SIDING.....	157
7	Interior Wall and Ceiling Finish Categories.....	163
7.1	INTERIOR WALL AND CEILING FINISH TYPES.....	163
7.2	INTERIOR WALL FINISH CHARACTERISTICS AND CERTIFICATIONS.....	163
7.3	INTERIOR WALL AND CEILING FINISH INSTALLATION, SERVICE LIFE, AND USE PHASE.....	164
7.4	GENERIC LATEX PAINT.....	164
8	Exterior Wall and Ceiling Insulation Category.....	171
8.1	EXTERIOR WALL AND CEILING FINISH TYPES.....	171
8.2	EXTERIOR WALL AND CEILING INSULATION CHARACTERISTICS AND CERTIFICATIONS.....	172
8.3	EXTERIOR WALL AND CEILING INSULATION INSTALLATION, SERVICE LIFE, AND USE PHASE.....	172
8.4	GENERIC MINERAL WOOL INSULATION.....	173
8.5	GENERIC CELLULOSE INSULATION.....	177
8.6	GENERIC FIBERGLASS INSULATION.....	180
9	Partitions Category.....	185
9.1	PARTITION TYPES.....	185
9.2	PARTITION CHARACTERISTICS AND CERTIFICATIONS.....	185
9.3	PARTITION INSTALLATION, SERVICE LIFE, AND USE PHASE.....	185
9.4	AVERAGE NORTH AMERICAN GYPSUM WALLBOARD.....	186
10	Wall Sheathing Category (Under Development).....	191
11	Roof Sheathing Category (Under Development).....	191
12	Roof Coverings Category (Under Development).....	191
13	Parking Lot Paving Category (Under Development).....	191
14	Beams Category (Under Development).....	191
15	Columns Category (Under Development).....	191
16	Basement Walls Category (Under Development).....	191
17	Slab on Grade Category (Under Development).....	191
18	Software Development and Design.....	193
18.1	DATABASE.....	193
18.2	APPLICATION.....	193
19	Limitations and Future Research.....	197
	References.....	199

List of Figures

FIGURE 2-1 DECISION CRITERIA FOR SETTING PRODUCT SYSTEM BOUNDARIES	9
FIGURE 2-2 BEES INVENTORY DATA CATEGORIES	10
FIGURE 2-3 BEES STAKEHOLDER PANEL IMPORTANCE WEIGHTS SYNTHESIZED ACROSS VOTING INTEREST AND TIME HORIZON	30
FIGURE 2-4 BEES STAKEHOLDER PANEL IMPORTANCE WEIGHTS BY STAKEHOLDER VOTING INTEREST	31
FIGURE 2-5 BEES STAKEHOLDER PANEL IMPORTANCE WEIGHTS BY TIME HORIZON	31
FIGURE 3-1 EU ETS GHG ALLOWANCE PRICE (APRIL 2008 THROUGH SEPTEMBER 2018).....	37
FIGURE 5-1 ARMSTRONG VCT SYSTEM BOUNDARIES	46
FIGURE 5-2 ARMSTRONG LINOLEUM SYSTEM BOUNDARIES	47
FIGURE 5-3 ARMSTRONG BBT SYSTEM BOUNDARIES.....	47
FIGURE 5-4 MARMOLEUM SYSTEM BOUNDARIES.....	55
FIGURE 5-5 ETERNAL SYSTEM BOUNDARIES.....	55
FIGURE 5-6 TANDUS CENTIVA ER3 MODULAR RS FLOORING SYSTEM BOUNDARIES.....	63
FIGURE 5-7 TANDUS CENTIVA ETHOS FLOORING SYSTEM BOUNDARIES.....	63
FIGURE 5-8 TANDUS CENTIVA POWERBOND CUSHION RS, POWERBOND MEDFLOOR RS AND FLEX-AIRE CUSHION MODULAR RS SYSTEM BOUNDARIES	64
FIGURE 5-9 CERAMIC TILE SYSTEM BOUNDARIES	69
FIGURE 5-10 VINYL COMPOSITION TILE SYSTEM BOUNDARIES	73
FIGURE 5-11 CORK FLOATING PLANK FLOOR SYSTEM BOUNDARIES.....	77
FIGURE 5-12 COMPOSITE MARBLE TILE SYSTEM BOUNDARIES	82
FIGURE 5-13 SOLID HARDWOOD FLOORING SYSTEM BOUNDARIES	87
FIGURE 5-14 ENGINEERED WOOD FLOORING SYSTEM BOUNDARIES	88
FIGURE 5-15 SOLID HARDWOOD FLOORING UNIT PROCESSES	89
FIGURE 5-16 ENGINEERED WOOD FLOORING UNIT PROCESSES	90
FIGURE 5-17 NYLON BROADLOOM CARPET SYSTEM BOUNDARIES.....	94
FIGURE 5-18 NYLON CARPET TILE SYSTEM BOUNDARIES	95
FIGURE 5-19 PET BROADLOOM CARPET SYSTEM BOUNDARIES	100
FIGURE 5-20 TERRAZZO SYSTEM BOUNDARIES.....	105
FIGURE 5-21 WOOL BROADLOOM CARPET SYSTEM BOUNDARIES	109
FIGURE 5-22 WOOL CARPET TILE SYSTEM BOUNDARIES.....	110
FIGURE 6-1 PORTLAND CEMENT THREE-COAT STUCCO SYSTEM BOUNDARIES	119
FIGURE 6-2 MASONRY CEMENT THREE-COAT STUCCO SYSTEM BOUNDARIES	120
FIGURE 6-3 ONE-COAT STUCCO SYSTEM BOUNDARIES	120
FIGURE 6-4 DRYFIT OUTSULATION SYSTEM BOUNDARIES.....	125
FIGURE 6-5 DRYFIT OUTSULATION SYSTEM BOUNDARIES.....	125
FIGURE 6-6 CERTAINTEED VINYL SIDING SYSTEM BOUNDARIES.....	130
FIGURE 6-7 CERTAINTEED RECYCLED CONTENT CEDARBOARDS SYSTEM BOUNDARIES	131
FIGURE 6-8 CERTAINTEED CEDAR IMPRESSIONS SYSTEM BOUNDARIES	131
FIGURE 6-9 CERTAINTEED WEATHERBOARDS (WITH RECYCLED CONTENT) SYSTEM BOUNDARIES.....	132
FIGURE 6-10 CERTAINTEED WEATHERBOARDS (NO RECYCLED CONTENT) SYSTEM BOUNDARIES	132
FIGURE 6-11 VINYL SIDING SYSTEM BOUNDARIES	141
FIGURE 6-12 INSULATED VINYL SIDING SYSTEM BOUNDARIES	141
FIGURE 6-13 ALUMINUM SIDING SYSTEM BOUNDARIES	146
FIGURE 6-14 PROCESS FLOW CHAR FOR A SUBSTITUTION APPROACH	148
FIGURE 6-15 BRICK & MORTAR SYSTEM BOUNDARIES	151
FIGURE 6-16 CEDAR SIDING SYSTEM BOUNDARIES	155
FIGURE 6-17 POLYPROPYLENE SIDING SYSTEM BOUNDARIES.....	158

FIGURE 7-1 GENERIC LATEX PAINT SYSTEM BOUNDARIES	165
FIGURE 7-2 GENERIC LATEX PAINT SYSTEM BOUNDARIES	165
FIGURE 8-1 MINERAL WOOL BOARD INSULATION SYSTEM BOUNDARIES.....	174
FIGURE 8-2 LOOSE FILL MINERAL WOOL INSULATION SYSTEM BOUNDARIES.....	174
FIGURE 8-3 CELLULOSE INSULATION SYSTEM BOUNDARIES.....	178
FIGURE 8-4 FIBERGLASS BATT INSULATION SYSTEM BOUNDARIES	181
FIGURE 8-5 LOOSE FILL FIBERGLASS INSULATION SYSTEM BOUNDARIES	181
FIGURE 9-1 GYPSUM BOARD SYSTEM BOUNDARIES	186
FIGURE 18-1 APPLICATION INFORMATION FLOW	194

List of Tables

TABLE 2-1 BEES RESULTS CATEGORIES.....	13
TABLE 2-2 SAMPLE CALCULATION TO OBTAIN GWP.....	14
TABLE 2-3 PCR IMPACT CATEGORIES FOR U.S. BY CURRENT PRODUCT CATEGORY.....	22
TABLE 2-4 PCR IMPACT CATEGORIES BY FUTURE PRODUCT CATEGORY.....	23
TABLE 2-5 PCR PUBLICATION TIMELINE.....	24
TABLE 2-6 BEES NORMALIZATION REFERENCES.....	26
TABLE 2-7 PAIRWISE COMPARISON VALUES FOR DERIVING IMPACT CATEGORY IMPORTANCE WEIGHTS.....	28
TABLE 2-8 RELATIVE IMPORTANCE WEIGHTS BASED ON SCIENCE ADVISORY BOARD STUDY.....	28
TABLE 2-9 RELATIVE IMPORTANCE WEIGHTS BASED ON BEES STAKEHOLDER PANEL JUDGMENTS.....	30
TABLE 3-1 SOCIAL COST OF CARBON ESTIMATES.....	36
TABLE 4-1 UNIFORMAT II MAJOR GROUP AND GROUP ELEMENTS.....	39
TABLE 4-2 BEES PRODUCT CATEGORIES BY UNIFORMAT ELEMENT.....	41
TABLE 4-3 BEES PRODUCT CATEGORY FUNCTIONAL UNIT AND USE PHASE OPTIONS.....	42
TABLE 5-1 FLOOR COVERING TYPES AND SUBTYPES.....	43
TABLE 5-2 FLOOR COVERING CHARACTERISTICS AND CERTIFICATIONS.....	43
TABLE 5-3 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	45
TABLE 5-4 ARMSTRONG PRODUCTS INCLUDED IN BEES.....	46
TABLE 5-5 ARMSTRONG VCT COMPOSITION.....	48
TABLE 5-6 ARMSTRONG LINOLEUM COMPOSITION.....	48
TABLE 5-7 ARMSTRONG BBT COMPOSITION.....	48
TABLE 5-8 ARMSTRONG ADHESIVE USE.....	50
TABLE 5-9 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	52
TABLE 5-10 VCT AND BBT CLEANING PROCESSES AND FREQUENCY.....	52
TABLE 5-11 VCT AND BBT INTERMITTENT CLEANING INPUTS PER YEAR.....	52
TABLE 5-12 LINOLEUM CLEANING PROCESSES AND FREQUENCY.....	52
TABLE 5-13 LINOLEUM INTERMITTENT CLEANING INPUTS PER YEAR.....	53
TABLE 5-14 FORBO PRODUCTS INCLUDED IN BEES.....	54
TABLE 5-15 MARMOLEUM 2.0 AND MARMOLEUM 2.5 COMPOSITION.....	56
TABLE 5-16 ETERNAL VINYL SHEET COMPOSITION.....	56
TABLE 5-17 PRODUCTION INPUTS AND OUTPUTS - MARMOLEUM.....	58
TABLE 5-18 PRODUCTION INPUTS AND OUTPUTS FOR ETERNAL.....	58
TABLE 5-19 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	60
TABLE 5-20 LINOLEUM CLEANING PROCESSES AND FREQUENCY.....	60
TABLE 5-21 LINOLEUM INTERMITTENT CLEANING INPUTS PER YEAR.....	60
TABLE 5-22 VINYL FLOOR COVERING CLEANING PROCESSES AND FREQUENCY.....	61
TABLE 5-23 VINYL INTERMITTENT CLEANING INPUTS PER YEAR.....	61
TABLE 5-24 TANDUS CENTIVA PRODUCTS INCLUDED IN BEES.....	62
TABLE 5-25 TANDUS CENTIVA FLOORING COMPOSITIONS.....	64
TABLE 5-26 TANDUS CENTIVA POWERBOND CUSHION RS, FLEX-AIRE CUSHION MODULAR RS, AND POWERBOND MEDFLOOR RS COMPOSITION.....	65
TABLE 5-27 ENERGY PER CLEANING EVENT.....	67
TABLE 5-28 INPUTS PER CLEANING EVENT.....	67
TABLE 5-29 OUTPUTS PER CLEANING EVENT.....	68
TABLE 5-30 CERAMIC TILE COMPOSITION.....	69
TABLE 5-31 LATEX/MORTAR BLEND COMPOSITION.....	71
TABLE 5-32 VINYL COMPOSITION TILE COMPOSITION.....	73
TABLE 5-33 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	76

TABLE 5-34 CLEANING PROCESSES AND FREQUENCY	76
TABLE 5-35 VCT INTERMITTENT CLEANING INPUTS PER YEAR.....	76
TABLE 5-36 CORK FLOATING PLANK FLOOR COMPOSITION.....	78
TABLE 5-37 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	80
TABLE 5-38 CORK FLOORING COVERING CLEANING PROCESSES AND FREQUENCY	80
TABLE 5-39 TOTAL INPUTS FOR INTERMITTENT CLEANING PER YEAR.....	81
TABLE 5-40 COMPOSITE MARBLE TILE MATRIX COMPOSITION	82
TABLE 5-41 ENERGY REQUIREMENTS FOR COMPOSITE MARBLE TILE MANUFACTURING.....	83
TABLE 5-42 LATEX/MORTAR BLEND CONSTITUENTS	84
TABLE 5-43 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	85
TABLE 5-44 CLEANING PROCESSES AND FREQUENCY	85
TABLE 5-45 COMPOSITE MARBLE TILE INTERMITTENT CLEANING INPUTS PER YEAR.....	86
TABLE 5-46 WOOD FLOORING PRODUCTS IN BEES	87
TABLE 5-47 INSTALLATION MATERIALS – WOOD FLOORING	91
TABLE 5-48 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	92
TABLE 5-49 HARDWOOD AND ENGINEERED WOOD FLOOR CLEANING PROCESSES AND FREQUENCY.....	93
TABLE 5-50 INTERMITTENT CLEANING INPUTS PER YEAR.....	93
TABLE 5-51 NYLON CARPET CONSTITUENTS	96
TABLE 5-52 ENERGY REQUIREMENTS FOR NYLON CARPET MANUFACTURING	97
TABLE 5-53 ENERGY PER CLEANING EVENT	99
TABLE 5-54 INPUTS PER CLEANING EVENT	99
TABLE 5-55 OUTPUTS PER CLEANING EVENT.....	99
TABLE 5-56 POLYESTER BROADLOOM CARPET CONSTITUENTS	101
TABLE 5-57 ENERGY REQUIREMENTS FOR PET CARPET MANUFACTURING.....	101
TABLE 5-58 ENERGY PER CLEANING EVENT	103
TABLE 5-59 INPUTS PER CLEANING EVENT	104
TABLE 5-60 OUTPUTS PER CLEANING EVENT.....	104
TABLE 5-61 TERRAZZO CARPET CONSTITUENTS	105
TABLE 5-62 ENERGY REQUIREMENTS FOR TERRAZZO MANUFACTURING	106
TABLE 5-63 INPUTS AND OUTPUTS PER REGULAR CLEANING EVENT.....	108
TABLE 5-64 TERRAZZO CLEANING PROCESSES AND FREQUENCY.....	108
TABLE 5-65 TERRAZZO INTERMITTENT CLEANING INPUTS PER YEAR.....	108
TABLE 5-66 WOOL CARPET CONSTITUENTS	111
TABLE 5-67 RAW WOOL CONSTITUENTS.....	112
TABLE 5-68 WOOL YARN PRODUCTION REQUIREMENTS	112
TABLE 5-69 WOOL YARN BLEACHING INPUTS	113
TABLE 5-70 ENERGY REQUIREMENTS FOR WOOL CARPET TUFTING	113
TABLE 5-71 ENERGY PER CLEANING EVENT	115
TABLE 5-72 INPUTS PER CLEANING EVENT	115
TABLE 5-73 OUTPUTS PER CLEANING EVENT.....	115
TABLE 6-1 EXTERIOR WALL FINISH TYPES AND SUBTYPES	117
TABLE 6-2 EXTERIOR WALL FINISH CHARACTERISTICS AND CERTIFICATIONS	117
TABLE 6-3 DENSITY OF STUCCO BY PLASTER CEMENT TYPE.....	118
TABLE 6-4 THREE COAT STUCCO CONSTITUENTS	121
TABLE 6-5 ONE COAT STUCCO CONSTITUENTS.....	121
TABLE 6-6 MASONRY CEMENT CONSTITUENTS.....	121
TABLE 6-7 OUTSULATION AND OUTSULATION PLUS PRODUCT CONSTITUENTS	126
TABLE 6-8 OUTSULATION MD PRODUCT CONSTITUENTS	126
TABLE 6-9 ENERGY REQUIREMENTS FOR MIXING DRYVIT OUTSULATION AND OUTSULATION PLUS MATERIALS	127

TABLE 6-10 DRYVIT EIFS CONSTITUENTS	128
TABLE 6-11 VINYL SIDING CONSTITUENTS (WEIGHTED AVERAGE).....	133
TABLE 6-12 RECYCLED CONTENT CEDARBOARDS SIDING CONSTITUENTS.....	133
TABLE 6-13 PVC FLAKE RECYCLING ENERGY	134
TABLE 6-14 LAMINATION GLUE CONSTITUENTS	134
TABLE 6-15 CEDAR IMPRESSIONS CONSTITUENTS.....	134
TABLE 6-16 WEATHERBOARDS CONSTITUENTS.....	135
TABLE 6-17 ENERGY REQUIREMENTS FOR CERTAINTEED VINYL- AND PP-BASED PRODUCTS.....	136
TABLE 6-18 OTHER PROCESS DATA FOR CERTAINTEED VINYL- AND PP-BASED PRODUCTS.....	136
TABLE 6-19 ENERGY REQUIREMENTS FOR WEATHERBOARDS.....	137
TABLE 6-20 OTHER PROCESS DATA FOR WEATHERBOARDS.....	138
TABLE 6-21 VINYL SIDING CONSTITUENTS	142
TABLE 6-22 ENERGY AND WATER REQUIREMENTS FOR VINYL SIDING	143
TABLE 6-23 AIR EMISSIONS DATA FOR VINYL SIDING	143
TABLE 6-24 INSULATED VINYL SIDING CONSTITUENTS	144
TABLE 6-25 LAMINATED GLUE CONSTITUENTS	144
TABLE 6-26 ALUMINUM SIDING CONSTITUENTS	147
TABLE 6-27 FIRED BRICK CONSTITUENTS.....	151
TABLE 6-28 MASONRY CONSTITUENTS.....	152
TABLE 6-29 ENERGY REQUIREMENTS FOR BRICK MANUFACTURING.....	152
TABLE 6-30 U.S. BRICK PRODUCTION BY CENSUS REGION.....	153
TABLE 6-31 POLYPROPYLENE SIDING CONSTITUENTS	159
TABLE 6-32 ENERGY AND WATER REQUIREMENTS FOR POLYPROPYLENE SIDING.....	159
TABLE 7-1 INTERIOR WALL AND CEILING FINISH TYPES AND SUBTYPES.....	163
TABLE 7-2 EXTERIOR WALL AND CEILING FINISH CHARACTERISTICS AND CERTIFICATIONS	164
TABLE 7-3 VIRGIN LATEX PAINT CONSTITUENTS	166
TABLE 7-4 LATEX PAINT RESIN CONSTITUENTS	166
TABLE 7-5 CONSOLIDATED PAINT SORTING DATA.....	168
TABLE 7-6 CONSOLIDATED PAINT PROCESSING DATA.....	168
TABLE 7-7 REPROCESSED PAINT SORTING AND PROCESSING DATA.....	169
TABLE 8-1 INTERIOR WALL AND CEILING INSULATION TYPES, SUBTYPES, AND FUNCTION UNIT CONVERSION	172
TABLE 8-2 EXTERIOR WALL AND CEILING INSULATION CHARACTERISTICS AND CERTIFICATIONS.....	172
TABLE 8-3 MINERAL WOOL BOARD INSULATION BY APPLICATION	173
TABLE 8-4 LOOSE FILL MINERAL WOOL INSULATION BY APPLICATION	173
TABLE 8-5 MINERAL WOOL BOARD INSULATION CONSTITUENTS	175
TABLE 8-6 LOOSE FILL MINERAL WOOL INSULATION CONSTITUENTS	175
TABLE 8-7 BLOWN CELLULOSE INSULATION BY APPLICATION.....	177
TABLE 8-8 CELLULOSE INSULATION CONSTITUENTS	178
TABLE 8-9 FIBERGLASS BATT INSULATION BY APPLICATION.....	180
TABLE 8-10 LOOSE FILL FIBERGLASS INSULATION BY APPLICATION.....	180
TABLE 8-11 FIBERGLASS INSULATION CONSTITUENTS.....	182
TABLE 9-1 INTERIOR WALL AND CEILING FINISH TYPES AND SUBTYPES.....	185
TABLE 9-2 EXTERIOR WALL AND CEILING FINISH CHARACTERISTICS AND CERTIFICATIONS	185
TABLE 9-3 GWB INPUTS PER MSF.....	187
TABLE 9-4 INDUSTRY-AVERAGE DISTANCES TO BUILDING SITE.....	188

List of Acronyms

Acronym	Definition
AA	Aluminum Association
ACC	American Chemistry Council
ADP	abiotic depletion potential
AEO	Applied Economics Office
AHP	Analytical Hierarchy Process
ASA	acrylonitrile styrene acrylate
ASHRAE	American Society of Heating, Refrigerating and Air-Conditioning Engineers
ASTM	American Society for Testing and Materials
AWARE	Available Water Remaining
BBT	BioBased Tile
BEES	Building for Environmental and Economic Sustainability
BETR	Berkeley-Trent
BIRDS	Building Industry Reporting and Design for Sustainability
BIRDS NEST	BIRDS Neutral Environment Software Tool
CaCO ₃	calcium carbonate
CCACTI	Consortium on Competitiveness for the Apparel, Carpet, and Textile Industries
CED	Cumulative Energy Demand
CFC	chlorofluorocarbons
CFC-11	trichlorofluoromethane
CML	Center of Environmental Science of Leiden University
CML-IA	CML Impact Assessment Characterisation Factors
CO ₂ e	carbon dioxide equivalent
CORRIM	Consortium for Research on Renewable Industrial Materials
CPG	Comprehensive Procurement Guideline
CPI	Consumer Price Index
CRI	Carpet and Rug Institute
CTUh	comparative toxic units for human toxicity
CTUe	comparative toxic units for ecotoxicity
DEHP/DINP/DIDP	phthalate esters
DOE	Department of Energy
DOTP	Diethyl Terephthalate
EDIP	Environmental Development of Industrial Products
EIFS	Exterior Insulation and Finish Systems
EL	Engineering Laboratory
EPA	Environmental Protection Agency
EPD	environmental product declaration
EPS	expanded polystyrene
ETS	Emissions Trading Systems
EU	European Union
FEMP	Federal Energy Management Program

Acronym	Definition
FGD	flue gas desulfurization
GA	Gypsum Association
GHG	greenhouse gas
GSA	General Services Administration
GWB	gypsum wallboard
GWP	Global Warming Potential
HDF	High Density Fiberboard
HDPE	high density polyethylene
HHW	Household Hazardous Waste
IAQ	indoor air quality
ICC	International Code Council
IE4B	Impact Estimator for Buildings
IPCC	Intergovernmental Panel on Climate Change
ISO	International Organization for Standardization
LCA	life-cycle assessment
LCC	life-cycle cost
LCCA	life-cycle cost analysis
LCI	life-cycle inventory
LCIA	life-cycle impact assessment
LDPE	low-density polyethylene
LEED	Leadership in Energy and Environmental Design
MEK	methyl ethyl ketone
MEKP	methyl ethyl ketone peroxide
MSDS	material safety data sheet
NAIMA	North American Insulation Manufacturers Association
NIST	National Institute of Standards and Technology
NREL	National Renewable Energy Laboratory
NTMA	National Terrazzo and Mosaic Association
O ₃	ozone
PAF	potentially affected fraction
PC	post-consumer
PCA	Portland Cement Association
PCR	product category rules
PET	polyethylene terephthalate
PM _{2.5}	particulate matter less than 2.5 micrometers in diameter
PP	propylene
PUR	polyurethane
PVA	polyvinyl acetate
PVB	polyvinyl butyral
PVC	polyvinyl chloride
RECs	Renewable Energy Credits
RS	Revolutionary System

Acronym	Definition
RGGI	Regional Greenhouse Gas Initiative
SAB	Science Advisory Board
SB	Styrene butadiene
SCAQMD	South Coast Air Quality Management District
SCC	social cost of carbon
SETAC	Society of Environmental Toxicology and Chemistry
SMA	Stucco Manufacturers Association
SO ₂	sulfur dioxide
SOM	soil organic matter
TCNA	Tile Council of North America, Inc.
TRACI	Tool for the Reduction and Assessment of Chemical and other environmental Impacts
UF	urea-formaldehyde
UNEP	United Nations Environment Programme
USDA	U.S. Department of Agriculture
USES-LCA	Uniform System for the Evaluation of Substances adapted for LCA
USEtox	UNEP-SETAC toxicity
USGBC	U.S. Green Building Council
UV	ultraviolet
VCT	vinyl composition tile
VOC	volatile organic compound
VSI	Vinyl Siding Institute
WARM	Waste Reduction Model
WATSON	water and soil environmental fate and exposure model of noxious substances at the European scale
WRONZ	Wool Research Organization of New Zealand

1 Introduction to BEES

1.1 Background

Building stakeholders need practical metrics, data, and tools to support decisions related to sustainable building products. To assist in meeting this national need, the Applied Economics Office (AEO) in the Engineering Laboratory (EL) of the National Institute of Standards and Technology (NIST) developed software, known as Building for Environmental and Economic Sustainability (BEES), to analyze the sustainability of building products. The initial version of BEES was released as a desktop application in 1997 followed by several updated versions throughout the 2000s. In 2010, BEES was transitioned into a web-based application called BEES Online (National Institute of Standards and Technology (NIST), 2010). Through a combination of NIST-funded and privately-funded data development, over 230 products across over 30 product categories are currently available in BEES Online.

AEO has developed a new version of BEES Online, named BEES Online 2.0, that uses the BEES framework in combination with new and updated data sources, methodologies, and processes to update the sustainability results for the building products available in BEES Online. In so doing, AEO is keeping BEES scientifically sound while maintaining consistency with current sustainability evaluation practices desired by industry stakeholders. This technical manual documents the development, including the assumptions and data sources used, of the BEES Online 2.0 product database and web application.

1.2 BEES Model

The BEES methodology takes a multidimensional, life cycle approach by considering multiple sustainability criteria: environmental, economic, and social impacts, over the entire life of a building product. Considering multiple impacts and life cycle stages is necessary because product selection decisions based on one criteria or life cycle stage could obscure others that might cause equal or greater damage. Consider the recent trend of climate change-focused, “carbon neutral” product labeling, which only considers the amount of carbon emitted due to its production but may ignore any carbon associated with other life cycle stages, such as the product’s use, maintenance, replacement, and/or disposal. A single-impact focus excludes other environmental impacts, such as smog formation, the effects of acid gases, or water consumption, that a product may potentially cause over its useful life. Without consideration of these other environmental impacts as well as the cost-competitiveness and/or social implications of a product over its useful life, the true sustainability of a product is not adequately evaluated. In other words, a multidimensional, life cycle approach is necessary for a comprehensive, balanced analysis on building product sustainability.

It is relatively straightforward to select products based on initial costs because building products are bought and sold in the marketplace. However, the costs realized after a product is installed are often ignored in purchasing decisions. Some products last longer

than others, requiring consideration of when products must be replaced, and their associated future costs. Even more difficult is to include life cycle environmental impacts in our purchasing decisions. Environmental impacts such as global warming potential (GWP), water pollution, and resource depletion are generally economic externalities with their costs not reflected in the market prices of the products that generated the externalities. Moreover, even if there were a mandate today to include environmental “costs” in market prices, it would be nearly impossible to do so due to difficulties in assessing these impacts in economic terms. Economists have debated how to value clean air, clean water, and human health for decades, and consensus does not appear likely in the short-term future.

While environmental performance typically cannot be measured on a monetary scale, it can be quantified using the multi-disciplinary approach known as environmental Life Cycle Assessment (LCA) that addresses multiple impact categories over multiple life cycle stages. The BEES methodology measures environmental performance using LCA, following guidance in the International Organization for Standardization (ISO) 14040 and 14044 standards for LCA (International Organization for Standardization (ISO), 2006a, 2006b). These environmental performance measures can then be synthesized into an overall performance measure using the American Society for Testing and Materials (ASTM) standard for Multiattribute Decision Analysis (ASTM, 2016).

Economic performance is measured using the ASTM International standard life cycle cost (LCC) approach (ASTM, 2015). For the entire BEES analysis, building products are defined and classified based on UNIFORMAT II, the ASTM standard classification for building elements (ASTM, 2015e). LCA and LCC approaches implemented in BEES will be described in detail in Chapter 2 and Chapter 3, respectively. BEES product categories are summarized in Chapter 4 and BEES products’ modeling and assumptions are described in Chapter 5 through Chapter 17. Chapter 18 summarizes the BEES Online 2.0 software development and design. Chapter 19 discusses current limitations and development plans for BEES Online.

1.3 Notable Changes in BEES Online 2.0

1.3.1 Reasons for Updating BEES Online

NIST recognized that BEES Online needed updating, both in terms of the software interface and the underlying impact methods and product data. Given requirements for LCA in green certification programs, such as MRc2 – Building Product Disclosure and Optimization: Environmental Product Declaration in USGBC’s LEED v4 (U.S. Green Building Council, 2018), it is apparent that the use of standardized LCAs, such as Environmental Product Declarations (EPDs) based on industry-defined Product Category Rules (PCRs), is a strong trend in the industry that will continue to grow in the future. NIST has therefore developed BEES Online 2.0 to engage in this trend and address the needs of a broad range of stakeholders (architects, designers, government agencies,

certified LCA practitioners, green certification organizations, and consumers) who need affordable, standardized product LCAs.

New and proposed changes to redevelop BEES' methodology, data, and interface came about through discussions with stakeholders including the U.S. Green Building Council (USGBC), American Chemistry Council (ACC), Department of Energy (DOE) Federal Energy Management Program (FEMP), General Services Administration (GSA), Environmental Protection Agency (EPA), Federal government interagency environmental and sustainability groups/committees, standards and codes organizations, such as the American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) and International Code Council (ICC), as well as industry organizations and manufacturers.

1.3.2 Methodology and Data

Since the release of BEES Online in 2011, the science of LCA has improved both in terms of the methodology for LCA and life cycle impact assessment (LCIA) development as well as the quality of the available Life Cycle Inventory (LCI) data sources used to develop product LCAs/LCIAs. One of the key changes is the inclusion of the use phase for those products for which maintenance can vary significantly depending on application and occupant behavior.

All products from BEES Online are being transitioned to BEES Online 2.0, including updating the product data and results, removing any products no longer on the market or that are irrelevant, and identifying and adding new products. Product categories with one or two products, or products not explicitly installed in buildings (e.g., furniture cleaners) have lowest priority in the transition. BEES currently includes updated data for the following BEES' product categories: flooring, partitions (e.g., gypsum board), exterior wall finishes (e.g., cladding or siding), interior wall and ceiling finishes (e.g., paint), and wall and ceiling insulation.

The LCI results output is no longer available to users. Based on feedback from BEES users, they are more interested in aggregated results for decision making instead of detailed LCI flow analysis. Providing aggregated results allows for more focused attention (i.e., funding and labor) on providing a faster, more powerful user interface. Providing only aggregated results is also more practical; the impact results using the EPA's Tool for Reduction and Assessment of Chemicals and Other Environmental Impacts (TRACI) 2 methodology draw from thousands of LCI flows. This approach contrasts with the more rudimentary previous "BEES impact methodology", where the LCI flow list was much shorter and thus easier to manage.

The initial release of BEES Online used TRACI 1.0 methodology and impact categories to develop the product LCIA's. BEES Online 2.0 provides the same BEES categories but updates the methodology to the state-of-the-art impact methodologies including TRACI 2.1, Center of Environmental Science of Leiden University (CML) Impact Assessment Characterisation Factors (CML-IA), and Cumulative Energy Demand (CED) while

expanding impact categories to include water, land, and indoor air quality (IAQ). All products can be evaluated using one of three impact methodologies: TRACI 2.1, BEES, and PCR Impact Categories. TRACI 2 includes all TRACI 2.1 impact categories while BEES includes all TRACI 2.1 impact categories plus water use, land use, and IAQ. Selecting PCR Impact Categories will provide the user with only those impact categories specified in the product category's PCR, which could include TRACI and/or CML impact categories.

1.3.3 Interface

The BEES Online interface was redeveloped from scratch for BEES Online 2.0, allowing for a complete reevaluation of the needs and wants of BEES users. The resulting tool has improved the user experience and user options and has been designed for seamless expansion with future integration of current and new product categories.

BEES Online 2.0 increases the BEES user experience by making the interface more user friendly. Products are filterable based on product type and/or characteristics like recycled content, bio-based content, or product certification. The ability to filter simplifies the user experience and is important for selections that are made based on acquisition requirements not necessarily based on the LCA. Users can now easily navigate back to previous screens to make changes to their selections by using the Back and Next buttons available on each page. The results are customized to the user's selections and the user can download the results, allowing users to analyze the results in ways not currently provided within BEES.

Users are also provided with more options to customize their BEES analysis. A user can select from the traditional TRACI 2 impact categories, the more expansive BEES categories, or focus on the impact categories specified in the product category's PCR. BEES still includes life cycle cost analysis (LCCA) with custom real discount rate selection, but it now expands the capabilities by allowing users to customize the installed cost of each selected product as well as provides the ability to include a user-defined social cost of carbon. BEES Online 2.0 allows users to customize some use phase assumptions for the products where cleaning or maintaining the functionality of the product is an essential part of the life of the product (such as flooring). Users can customize the expected product service life and quantity of product installed. It is reasonable to assume that a product may not have the same expected service life in different applications (e.g., traffic patterns for flooring). Regardless of the selected product life, the results are provided on a per functional unit basis (e.g., impact per ft² of installed flooring) as well as total value of the quantity of product installed (e.g., impact of 1000 ft² of installed flooring) over 60 years. This timeframe is an increase from the assumed 50 years in BEES Online 1.0 to become consistent with the minimum building service life of 60 years for green building certification programs to fully account for maintenance and replacement.

1.4 Submission Process to BEES Online 2.0

1.4.1 Cost

NIST provides these standardized results at low or no cost to industry. When the timing allows, i.e., during a product development or update period, NIST covers the cost of developing and incorporating submitted products into BEES. NIST puts forth effort to inform manufacturers and industry organizations that NIST is open to new product submissions.

By leveraging internal project funds and economies of scale, NIST drastically decreases the cost of LCA development. This approach provides small manufacturers, which often consider the cost of completing an EPD prohibitive, an opportunity to participate and help grow competition in green product markets. If a manufacturer wants to submit a product to BEES in-between a product development/update period, the manufacturer pays a minimal fee for the LCA, after which their product may be added to an existing BEES category immediately.

NIST is dedicated to maintaining, further developing, and supporting BEES with internal funds to provide a reliable, user-friendly, free tool to help users make sustainable product selection decisions. Data collection for BEES Online 2.0 was done under contract with Four Elements Consulting, LLC using the SimaPro version 8 LCA software (PRE Sustainability, 2018). For more information about submitting a product to BEES, please contact Joshua Kneifel at joshua.kneifel@nist.gov.

1.4.2 BEES Product LCA Development Process

BEES environmental LCAs are developed with the SimaPro software (PRE Sustainability, 2018) using a standardized LCA model and well-respected and globally-accepted LCA databases including ecoinvent (Ecoinvent, 2017) and the U.S. LCI database (National Renewable Energy Laboratory (NREL), 2012). NIST works with industry associations and manufacturers to strive for product data that is temporally, geographically, and technologically representative. The BEES product database is maintained by updating both product-specific data and background data every several years, dependent on changes to PCRs, impact methods, source data, and available funding and resources. The same boundary conditions, assumptions, and study period (60 years) are applied to all products in a category. Since the same software, datasets, and system boundaries are used for all products in a category, the variability issues often seen in LCAs across an industry are greatly minimized. Although not currently included in BEES Online 2.0, NIST is evaluating the ability to incorporate uncertainty into the product LCAs in future releases of BEES to better assist in product comparison.

1.4.3 Products with Existing EPDs

PCRs provide some parameters around standardizing the development of consistent LCAs and resulting EPDs. However, the use of different background databases, data set

availabilities for materials, and allocation or other methodological rules, create variability amongst different LCA models, even for the same product. Despite this problem, the limitations around differences in LCAs based on these factors are generally understood within the LCA community, and public EPDs caution users to avoid making comparisons with other EPDs, such as:

EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts.

While the intended purpose of an EPD is anything but using it to compare with other products, comparisons are still made. Since there is so much variability amongst the LCAs behind the EPDs, making comparisons could lead to erroneous conclusions, especially for users who do not understand these limitations.

The goal for BEES has always been to minimize this variability issue and allow for fair comparability by ensuring that all its LCA models are built using the same background data sets and methodological considerations.

When a product has already undergone the EPD process and the EPD owner wants that product in BEES, NIST obtains the underlying information (e.g., the primary data) and then rebuilds the LCA model within SimaPro using the same background data as other products in that category. This process inevitably may lead to different results for some impact categories than those published in the EPD. EPD owners review the results and assumptions, and in our experience, they have been accepting of the differences as being the nature of the current state of LCA, not just an issue with BEES. NIST recognizes that, in general, data set variability would be minimized with a publicly available, standardized, comprehensive database to be used with all LCA software platforms or tools (like BEES or even EPDs), but such a database does not currently exist.

Based on the language in Leadership in Energy and Environmental Design (LEED) v4, we are aware that LCAs are required to be “critically reviewed” to be used toward LEED credit. While NIST develops well-documented, cradle-to-grave product LCAs based on the standards and requirements conforming to ISO 14044 and the most recent PCRs and has implemented an internal validation process, the LCAs do not go through an official 3rd party verification process as would be completed during a formal EPD process.

2 Environmental Performance

Environmental LCA is a “cradle-to-grave,” systems approach for measuring environmental performance. The approach is based on the logic that all stages in the life of a product generate environmental impacts and must therefore be analyzed, including raw materials acquisition, product manufacture, transportation, installation, operation and maintenance, and ultimately recycling and waste management. An analysis that excludes any of these stages – without explicit rationale for doing so – is limited because it ignores the full range of upstream and downstream impacts of stage-specific processes.

The strength of LCA is its comprehensive, multi-dimensional scope. Some green product claims and strategies are based on a single life cycle stage or a single environmental impact. A product may be claimed to be green simply because it has recycled content or accused of not being green because it emits volatile organic compounds (VOCs) during its installation and use. These single-attribute claims may be misleading because they ignore the possibility that other life cycle stages, or other environmental impacts, may yield offsetting effects. For example, a product with recycled content may have a high embodied fuel content, leading to fossil fuel depletion, GWP, and acid rain impacts during the raw materials acquisition, manufacturing, and transportation life cycle stages. LCA thus broadens the environmental discussion by accounting for potential shifts of environmental problems from one life cycle stage to another, or one environmental medium (land, air, water) to another. The benefit of the LCA approach is in implementing a trade-off analysis to assess where in the life cycle overall impacts may be reduced, rather than limiting the scope to a shift of impact.

The general LCA methodology involves four steps (International Organization for Standardization (ISO), 2006a, 2006b).

1. Goal and scope definition
2. Inventory analysis
3. Impact assessment
4. Interpretation

The *goal and scope definition* step outlines the purpose of the study and its breadth and depth. The *inventory analysis* step identifies and quantifies the environmental inputs and outputs associated with a building product over its entire life cycle. The quantification and aggregation of results is called the LCI, which includes elementary flow inputs (i.e., resources from the earth, such as water, fossil fuels, minerals). Elementary flow outputs include releases to air, land, and water. The LCI output is large, and it is difficult to assign meaning to its individual elements. Nonetheless, we are interested in the LCI flows’ consequences, or how they may potentially impact the environment and human health, and this determination is done in the impact assessment step. The *impact assessment* step characterizes the flows in the LCI results in relation to a set of environmental impacts. For example, the impact assessment relates carbon dioxide (CO₂) and other greenhouse gas (GHG) emissions (e.g., methane), to GWP (an impact). Finally,

the *interpretation* step examines the results in accordance with the goals of the LCA study.

2.1 Goal and Scope Definition

The goal of BEES LCAs is to generate environmental impacts for building product alternatives sold in North America. These impacts are combined with economic performance to help the building community select cost-effective, environmentally-preferred building products. The goal and scope definitions include defining the system boundaries, cut-off criteria, the functional unit, and the data collection strategy.

Defining the system boundaries involves identifying the unit processes to be included. A unit process is the “smallest element considered in the LCI analysis for which input and output data are quantified.”¹ The manufacture of a product usually involves many unit processes (e.g., ethylene production for input to the manufacture of the styrene-butadiene bonding agent used in stucco cement in cladding). Each unit process involves many inventory flows, some of which themselves involve other, subsidiary unit processes. Boundary-setting rules determine which unit processes are included in the LCA, especially those that need collection of primary data. In the BEES system, the boundary-setting rule consists of a set of three decision criteria. For each candidate unit process, mass and energy contributions to the product system are the primary decision criteria. In some cases, cost contribution is used as a third criterion.² Together, these criteria provide a robust screening process, as illustrated in Figure 2-1. A material must have a large contribution to at least one decision criterion to be selected. The weight criterion selects materials A, B, and C; the energy criterion selects material E; and cost selects material I. As a result, the unit processes for producing ancillary materials A, B, C, E, and I are included in the system boundaries.

¹ Sec. 3.34 of International Organization for Standardization (ISO) (2006b).

² While a large cost contribution does not directly indicate a significant environmental impact, it may indicate scarce natural resources or numerous subsidiary unit processes potentially involving high energy consumption.

<i>Ancillary material</i>	<i>Weight</i>	<i>Energy</i>	<i>Cost (as a flag when necessary)</i>	<i>Included in system boundaries?</i>
A				Yes
B				Yes
C				Yes
D				No
E				Yes
F				No
G				No
H				No
I				Yes

	negligible contribution
	small contribution
	large contribution

Figure 2-1 Decision Criteria for Setting Product System Boundaries

For each unit process that is identified in the system boundary, and where background data from LCA databases are not available, data need to be collected. Manufacturers responsible for manufacturing operations of and the bill of materials for a product can use a questionnaire to collect data. Outflows collected are often those that are relevant to the specific industry (e.g., particulates from mining). Databases take care of background data sets, which are the supporting data for the products' defined unit processes. Background data can include materials, energy and fuel inputs, and transportation. Where manufacturers do not have control over data on their products, such as whether their product is recycled or landfilled at end of life, the LCA practitioner makes assumptions or uses industry-backed data on the typical practice.

Defining the unit of comparison is another important task in the goal and scoping phase of LCA. The basis for all units of comparison is the functional unit, defined so that the products compared may be true substitutes for one another. The functional unit provides the critical reference point to which all inventory flows are scaled. For example, the functional unit for the floor covering alternatives is 0.093 m² (1 ft²) of flooring; its production, installation, maintenance, end of life management, and replacements over the 60-year study period are all quantified and normalized to this defined area.

Data requirements are defined in the scoping phase as well. BEES includes the following:

- Geographic coverage – The data are based on North American conditions and technology wherever possible.
- Time period coverage – When updating products, the goal is to collect the most recent, best available data from manufacturers or industry associations. Primary data from manufacturers and industry associations is targeted to be less than five years old. Background data are targeted to be less than 10 years old. These data goals are typically met by updating product categories every three to five years and ensuring that the latest databases used in LCA modeling tools are current. Databases,

especially ones like ecoinvent (Ecoinvent, 2017), are constantly being updated with newer foreground and/or background data.

- Technology coverage – For generic products, the most representative technology is evaluated. When data for the most representative technology are not available, an aggregated result is developed based on the U.S. average technology for that industry.
- Databases – The data for fuels, energy, transportation means, and materials (where available) come from the U.S. LCI database, developed using a common, ISO 14040-consistent research protocol (National Renewable Energy Laboratory (NREL), 2012). Data for all other materials come from ecoinvent (Ecoinvent, 2017).

2.2 Inventory Analysis

Inventory analysis entails quantifying the inputs and outputs for the unit processes within a product system. One of the primary tasks is data collection that ensures the product system evaluated is representative and appropriately addresses the cut-off criteria, data and data quality requirements, and other scoping factors. Data are collected for each defined unit process. As shown in Figure 2-2, to produce a given product or intermediate product, inputs collected include energy, fuels, net water use, ancillary materials, and product components/materials. Outputs may include direct emissions to air and water, and waste categories.

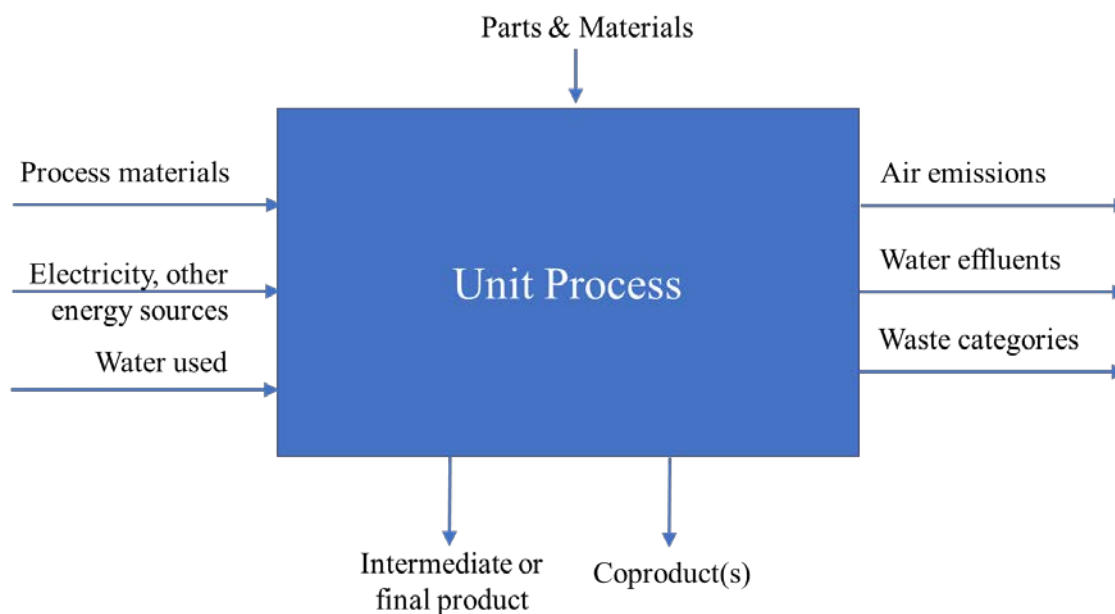


Figure 2-2 BEES Inventory Data Categories

Numerous approaches may be used to collect inventory data for LCAs. These range from (EPA, 1993):

- Unit process- and facility-specific: collect data from a process within a given facility that are not combined in any way

- Composite: collect data from the same process combined across locations
- Aggregated: collect data combining more than one process
- Industry-average: collect data derived from a representative sample of locations believed to statistically describe the typical process across technologies
- Descriptive: collect data whose representation may be unknown but which are qualitatively descriptive of a process

For the generic BEES products necessitating U.S.- or North American-average data and results, generic product data are primarily collected using the industry-average approach. Manufacturer-specific product data are primarily collected using the unit process- and facility-specific approach (and documentation of specific data are often aggregated to preserve manufacturer confidentiality). It is NIST's goal to strive for product data that represents the closest approximations available of the impacts and attributes associated with each product. Some of the products in BEES are built using detailed LCA questionnaires and/or shorter surveys sent to industry experts, while others are built using published LCA reports. In most cases, any assumptions regarding the associated unit processes are verified through experts in the respective industries to assure the data have been appropriately represented in BEES. Today, many industry average and company specific products have already-published EPDs, which are based on externally-verified LCAs. For products in BEES that have undergone the EPD process, much, if not all, of the product data come from the EPDs' supporting LCAs, with the approval of the EPD owner.

2.3 Life Cycle Impact Assessment

The impact assessment step of LCA quantifies the potential contribution of LCI results flows to a range of environmental impacts. The approach preferred by most LCA practitioners and scientists today involves a two-step process:

- *Classification* of inventory flows that contribute to specific environmental impacts. For example, GHGs such as CO₂, methane, and nitrous oxide are classified as contributing to GWP.
- *Characterization* of the potential contribution of each classified inventory flow to the corresponding environmental impact. This characterization results in a set of indices, one for each impact, which is obtained by weighting each classified inventory flow by its relative contribution to the impact. For instance, the GWP index is derived by expressing each GHG in terms of its equivalent amount of CO₂ heat trapping potential.

There are two general applications of this LCIA approach: midpoint-level and endpoint-level analyses. An endpoint-level analysis attempts to measure the ultimate damage that each environmental input and output in the inventory will have along the cause-effect chain. Methods of this type usually include just a few impact categories, such as damage to human health, ecosystems, and resource availability. The fewer categories make it

easier to interpret results. But this approach is criticized for the numerous assumptions, value judgments, and gaps in coverage of the underlying damage models. A midpoint-level analysis, on the other hand, selects points along the cause-effect chain at which more certain and comprehensive assessments may be carried out. While this approach generates many impact categories and makes results interpretation more difficult, it is more scientifically defensible. Even so, not all environmental impacts covered by the midpoint-level analysis offer the same degree of relevance. For global and regional effects (e.g., GWP and acidification) the method provides a more accurate description of the potential impact given the body of scientific evidence. For impacts dependent upon local conditions (e.g., smog), it may result in an oversimplification of the actual impacts because the indices are not tailored to localities. For other impacts dependent upon local conditions and toxicity effects, there exist even greater uncertainties. This consequence is discussed in the human toxicity and ecotoxicity section below. Note that some impact assessments apply a mix of midpoint and endpoint approaches. For BEES, the mid-point level analysis is used. It should be emphasized that LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

There are many LCIA methodologies available for LCA practitioners to assess the life cycle environmental profiles of products. While ISO 14044 does not specify which methodology needs to be used, the rationale for choosing one over another should be provided. The original BEES Online implemented U.S. EPA's TRACI version 1, which was based on North American conditions (Bare, Young, QAM, Hopton, & Chief, 2012). EPA's TRACI 2 is used in BEES Online 2.0. It is still considered to be the most well accepted methodology for North American LCA studies. It is also the methodology prescribed for many North American EPDs, either alone or in conjunction with more global methodologies, such as CML-IA. Finally, TRACI's comprehensive offering of impact categories meets the needs for a broad set of impact categories needed for BEES. It follows ISO's recommendation that the LCIA methodology "employ a sufficiently comprehensive set of category indicators," when comparisons are being made.³

In addition to TRACI 2, BEES 2.0 carries over from previous BEES versions additional environmental measures addressing water use, land use, energy, and indoor air quality (IAQ). A new feature in BEES 2.0 enables the user to choose the impact categories that are specified in the current PCR document for any given product category. For EPDs with North American PCRs (or North American versions of PCRs), TRACI 2 is generally required while CML categories tend to be optional for an EPD for global applicability. Table 2-1 summarizes the impact categories currently presented in BEES 2.0. The remainder of this section describes these methodologies and impact categories, including the impact categories required by PCRs for each product category.

³ Section 4.4.5. International Organization for Standardization (ISO) (2006b)

Users should note that BEES does not address all information that may be required by a PCR, for example, the reporting of regulated hazardous substances contained in the product and dangerous substances released from the manufacturing of the product (UL Environment, 2018a). Such information is outside the scope of BEES, which provides LCIA impact category results specified in the PCR but is not a pure substitute for an EPD.

At this time BEES does not include formal uncertainty analysis. Uncertainty exists throughout all levels of LCA, from the background data to impact characterization to normalization factors. NIST is evaluating the inclusion of uncertainty analysis into future releases of BEES.

Table 2-1 BEES Results Categories

BEES Results Sets	Included Impact Categories	Unit	Originating Methodology
TRACI 2	Ozone Depletion Potential	kg CFC-11 eq.	TRACI 2
	Global Warming Potential	kg CO ₂ eq.	TRACI 2
	Smog Formation Potential	kg O ₃ eq.	TRACI 2
	Acidification Potential	kg SO ₂ eq.	TRACI 2
	Eutrophication Potential	kg N eq.	TRACI 2
	Carcinogenics Potential	CTUh	TRACI 2
	Non-carcinogenics Potential	CTUh	TRACI 2
	Respiratory Effects Potential	kg PM _{2.5} eq.	TRACI 2
	Ecotoxicity Potential	CTUe	TRACI 2
	Primary Energy Consumption*	MJ	CED
BEES	<i>Above set of TRACI 2 impacts, plus</i>		
	Water Use	L	ReCiPe
	Land Use	m ²	ReCiPe
	Indoor Air Quality (IAQ)	kg VOC	NIST
Other Categories Specified in PCRs	Abiotic Depletion Potential	kg Sb eq.	CML
	Global Warming Potential	kg CO ₂ eq.	CML
	Ozone Depletion Potential	kg CFC-11 eq.	CML
	Photochemical Oxidization Potential	kg C ₂ H ₄ eq.	CML
	Acidification Potential	kg SO ₂ eq.	CML
	Eutrophication Potential	kg PO ₄ eq.	CML
	Primary Energy (non-renewable)	MJ	CED
	Primary Energy (renewable)	MJ	CED
* Primary Energy Consumption is used in place of Fossil Fuel Depletion for TRACI 2			

2.3.1 TRACI 2.1

The EPA’s TRACI impact methodology is a set of state-of-the-art, peer-reviewed life cycle impact assessment methods (Environmental Protection Agency, 2018), and provides characterization factors for LCIA, industrial ecology, and sustainability metrics. Characterization factors quantify the potential impacts that inputs and releases have on specific impact categories in common equivalence units (Ryberg, 2014). BEES Online 2.0 implements TRACI version 2, which has been updated to include additional substances and updated methodologies (Environmental Protection Agency, 2018) relative to TRACI version 1 that was implemented in the original BEES Online. TRACI 2.1

impact categories will be summarized in this section. The EPA has plans for updating TRACI (Version 3), which would include additional impact categories for land and water use. For more information, the user may consult the TRACI version 2.1 User’s Manual (Bare, 2012), which references Bare, Gloria, and Norris (2006) and Frischknecht (2007).

2.3.1.1 Global Warming Potential (GWP)

The Earth absorbs radiation from the Sun, mainly at the surface. This energy is then redistributed by the atmosphere and ocean and re-radiated to space at longer wavelengths. GHGs in the atmosphere, principally water vapor, but also CO₂, methane, chlorofluorocarbons, and ozone, absorb some of the thermal radiation. The absorbed energy is re-radiated in all directions, downwards as well as upwards, such that the radiation that is eventually lost to space is from higher, colder levels in the atmosphere. The result is that the surface loses less heat to space than it would in the absence of the GHGs and consequently stays warmer than it would be otherwise. This phenomenon, which acts like a ‘blanket’ around the Earth, is known as the greenhouse effect.

The greenhouse effect is a natural phenomenon. The GWP measure was developed to characterize the change in the greenhouse effect due to emissions (an increase in the effect) and absorptions (a decrease in the effect) attributable to humans. GWP is reported in kilograms (kg) of CO₂-equivalents (CO₂e or CO₂-eq) for both TRACI 2 and CML, and the relative impact weights, or characterization factors, represent a 100-year time horizon. The characterization factors are based on data from the Intergovernmental Panel on Climate Change (IPCC).⁴

To arrive at the GWP, the characterization factors for the different GHGs are multiplied by the mass outputs of their respective GHGs in the LCI results. Table 2-2 presents the conversion of sample inventory results of CO₂, methane (CH₄), and nitrous oxide (N₂O) to GWP. Other impact categories are calculated in this way, using the characterization factors and classified flows for each respective category.

Table 2-2 shows a sample calculation of total GWP using the 3 most common GHG flows and their associated weighting factors. The same approach is used in calculating the total flows for each impact category below.

Table 2-2 Sample Calculation to obtain GWP

Flow (i)	Weighting Factor (100 Years)	LCI Result	Calculated GHG Result
Carbon Dioxide (CO ₂ , net)	1	2000.0 kg	2000.0 kg CO ₂ -eq.
Methane (CH ₄)	30.5	15.0 kg	457.5 kg CO ₂ -eq.
Nitrous Oxide (N ₂ O)	265	0.05 kg	15.9 kg CO ₂ -eq.
		Total GWP	2473.4 kg CO₂-eq.

⁴ For more information, see IPCC at <https://www.ipcc.ch/>. Background data based on IPCC (2013).

2.3.1.2 Ozone Depletion Potential

Ozone depletion potential characterizes ozone depleting gases in product systems, which may include chlorofluorocarbons (CFCs) (e.g., Freon), halons, carbon tetrachloride, and trichloroethane. A decline in the ozone layer allows more harmful short-wave radiation to reach the Earth's surface, potentially causing damage to human health, plants, and changes to ecosystems. Ozone depletion is reported in kg of trichlorofluoromethane-equivalents (CFC-11-eq) for both TRACI 2 and CML.

2.3.1.3 Smog Formation Potential

Smog forms under certain climatic conditions when air emissions (e.g., nitrous oxides (NO_x), VOCs) from industry and transportation are trapped at ground level where they react in the presence of ultraviolet (UV) radiation and produce photochemical oxidants, including ozone (O₃). Smog formation potential, called photochemical oxidation potential by the CML methodology, measures the potential for smog to negatively affect human health and vegetation. Smog formation potential is reported in kg of O₃ equivalents. For CML, it is reported in kg ethylene equivalents (C₂H₄-eq).

2.3.1.4 Respiratory Effects Potential

Particulate matter and precursors to secondary particulates, including sulfur dioxide (SO₂) and NO_x, are generated by combustion of fossil fuels and wood. Dust from roadways and materials handling also contribute to particulate matter formation. Inhaling particulates and dust in the air may result in health issues such as asthma and other respiratory illnesses. This impact category is reported in kg PM_{2.5} (particulate matter of size less than or equal to 2.5 micrometers) equivalents.

2.3.1.5 Human and Ecological Toxicity

Human toxicity provides an indication of the risk to human health (carcinogenics, non-carcinogenics, and respiratory effects), while ecotoxicity results provide an indication of the risks of damage to land and water ecosystems. For toxicity, TRACI 2 has adopted the United Nations Environment Programme-Society of Environmental Toxicology and Chemistry (UNEP-SETAC) toxicity (USETox) methodology, a scientific consensus model whose development included contributions from CalTOX, IMPACT 2002, Uniform System for the Evaluation of Substances adapted for LCA (USES-LCA), Berkeley-Trent (BETR), Environmental Development of Industrial Products (EDIP), water and soil environmental fate and exposure model of noxious substances at the European scale (WATSON), and EcoSense (Rosenbaum, 2008). The characterization factors for human toxicity and ecotoxicity impacts are expressed in comparative toxic units for human toxicity and ecotoxicity (CTUh and CTUe, respectively), and for TRACI 2, factors have been customized to North American conditions. According to Fantke (2017), the CTUh provides the estimated increase in morbidity – number of cancer or non-cancer cases – in the total human population per unit mass of a contaminant emitted,

while CTUe provides an estimate of the potentially affected fraction (PAF) of species integrated over time and volume per unit mass of a chemical emitted.

BEES users should be aware that toxicity related methodologies used within the LCA framework do not provide the same level of reliability in the results as other methods. In general, limitations of more localized, toxicity-related LCIA results can be described as follows:

Spatial and temporal resolutions are not reflected in aggregated LCA results. When emissions are normalized to a functional unit of a product system, all impact results are relative and potential. The temporal and geographical characteristics which are needed to assess local environmental impacts, which may cause toxic effects, are not available in LCA impact results.

Threshold effects are lost in an LCA. LCA is based on a linear extrapolation of mass loadings with the assumption that this loading contributes to an environmental effect. This assumption is contrary to threshold-driven environmental and toxicological mechanisms. Thus, while the linear extrapolation of mass loadings is a reasonable approach for more global and regional impact categories such as GWP and acidification potential, it is not as appropriate a measure for human health- and ecotoxicity-related impacts because of the lack of concentration and exposure data. More conventional risk assessment methodologies for human health and ecotoxicity must then be applied.

Thanks to important contributions from numerous research organizations, the level of precision in USETox has decreased the uncertainty of toxicity impacts: for human health, the precision of the current USEtox characterization factors falls within 100 and 1000 orders of magnitude, and for freshwater ecotoxicity it is within 10 to 100 orders of magnitude (Rosenbaum, 2008). Users of BEES should understand these limitations, and as a result may not want to place as much emphasis on the toxicity results than some of the other categories in BEES such as GWP.

2.3.1.6 Eutrophication Potential

Eutrophication is the addition of mineral nutrients to the soil or water. In both media, the addition of large quantities of mineral nutrients, such as nitrogen and phosphorous, results in generally undesirable shifts in the number of species in ecosystems and a reduction in ecological diversity. In water, it tends to increase algae growth, which can lead to a lack of oxygen and subsequent death of species like fish. Eutrophication Potential is measured in kg of nitrogen (N) equivalents for TRACI 2 and phosphate (PO₄) equivalents for CML.

2.3.1.7 Acidification Potential

Acidifying compounds may, in a gaseous state, either dissolve in water or fix on solid particles. These compounds reach ecosystems through dissolution in rain or wet deposition and can affect trees, soil, buildings, animals, and humans. The two compounds

principally involved in acidification are sulfur and nitrogen compounds, with their principal human source being fossil fuel and biomass combustion. Other compounds released by human sources, such as hydrogen chloride and ammonia, also contribute to acidification. Acidification is measured in terms of kg of SO₂ equivalents for both TRACI 2 and CML.

2.3.1.8 Primary Energy Consumption

Total energy encompasses the energy used for fuel throughout the product system and the embodied energy in products, such as the hydrocarbons in plastics and chemicals. Total energy is further broken down into non-renewable and renewable energy. Non-renewable energy sources include fossil fuels and nuclear power. Examples of renewable energy include hydropower, wind power, and biomass. The energy category comes from the Cumulative Energy Demand (CED) methodology and results are reported in megajoules (MJ) (Frischknecht, 2007).⁵

2.3.1.9 Resource Depletion Category in TRACI 2

The TRACI 2 methodology includes a category called Fossil Fuel Depletion, reported in surplus megajoules (MJ surplus), which addresses the more general issue of resource depletion. This impact category is not included in BEES. Fossil fuel depletion characterizes the effect of the extraction and use of coal, natural gas, and oil as they relate to their respective remaining reserves in the earth. The Fossil Fuel Depletion methodology in TRACI 2 is carried over from the original version of TRACI, and (Bare, 2012) acknowledges that “quantification of this [sort of impact category is] the most controversial” relative to other impact categories whose science is less controversial, being based on legislation or international agreements.

2.3.2 BEES

The “BEES method” implements the same nine impact categories as defined in TRACI 2.1 plus three additional impact categories: land use, water use, and IAQ. Since TRACI 2.1 does not include land and water use, these two important resource depletion impacts are assessed using other characterization methods. IAQ impact category is included because it is of unique importance to occupants that a building maintains healthy indoor conditions. Following are brief descriptions of the three BEES-specific impact categories.

2.3.2.1 Water Use

For BEES, water use is measured by the amount of freshwater consumption in the product system and is calculated using the water use category in ReCiPe – representing the initials of the major collaborator institutions of RIVM and Radboud University, CML, and PRé (Huijbregts et al., 2017). ReCiPe’s water use category is simply the inventory of net water used throughout the product system from lakes, rivers, wells, and unspecified

⁵ See www.pre.nl and www.ecoinvent.org for more information.

natural origins. No weighting, characterization, or regionalization is accounted for in this category, and as a result, model uncertainty is minimized. While there are water footprinting and other water use methodologies that apply characterization factors and weighting to geographical regions based on water scarcity levels and other parameters, these approaches were not used but could be considered for future versions of BEES, such as the Available Water Remaining (AWARE) model (Boulay, 2018). The unit in BEES is liters (L) of water used.

2.3.2.2 Land Use

For BEES, the land use category from ReCiPe is used, accounting for surface area of land occupied and/or transformed within the system boundaries of the product system (Huijbregts et al., 2017). These flows are taken directly from the inventory results without further characterization of what happens to the quality of the land itself (such as depletion of soil organic matter (SOM)) or decrease of biodiversity. This approach to using only the area of land used or transformed minimizes uncertainty in the category results, since broad variability, and constantly changing factors pertaining to soil, land, species richness, etc. are removed from the equation. Land use is measured in square meters (m²).

2.3.2.3 Indoor Air Quality

Indoor air quality impacts are not included in traditional life cycle impact assessments. However, the indoor air performance of building products is of concern to the building community and should be explicitly considered in any building product LCA. Ideally, characterization factors would be available for indoor air pollutants as they are for other flows such as global warming gases. However, there is little scientific consensus about the relative contributions of pollutants to indoor air performance. In the absence of reliable characterization factors, the product's total VOC emissions at installation and during use phase are used as a proxy for indoor air performance. Note that a "total" VOC clusters and equally weights the contributions of the individual volatile compounds in the product system. Also, reliance on VOC emissions alone may be misleading if other indoor air contaminants, such as particulates, specific aerosols, and mold, are also present. Finally, total VOC published for different BEES products are highly dependent on the analytical method used, and there is no single analytical method that can measure the entire range of VOCs, rendering the term "total" somewhat misleading. The BEES user should understand these limitations.

Indoor air quality is assessed for building elements that are determined to potentially have a non-negligible release of VOCs, such as floor coverings, interior wall finishes, and furniture.

2.3.3 CML-IA

CML-IA was developed by the Institute of Environmental Sciences, Leiden University, The Netherlands. Like TRACI, CML is an impact assessment method that groups LCA results in midpoint categories. It has European Union (EU), general European, and global-based normalization factors but does not offer the further step of weighting. CML impact category results are available for product categories for which the current PCR document specifies CML. PCRs will be discussed in further detail later in this section. The CML impact categories that are the same as or parallel to the TRACI 2 categories (e.g., GWP, acidification potential, etc.) are discussed in the TRACI 2 sections, above. CML's abiotic depletion potential (ADP), which is required by some PCRs, is briefly described as follows.

ADP, developed by CML, is separated into two categories: minerals (measured in terms of kg antimony (Sb) equivalents per kg of mineral extraction) and fossil fuels (measured in terms of megajoule (MJ) equivalents per MJ of fuel extracted). ADP is calculated based on the mineral or fuel's content in the earth's crust and the rate of depletion, as they relate to their inputs in the product system. The factors for ADP are global in scope. ADP is included in BEES since it is listed as a required impact category in many PCRs. Nonetheless, for similar reasons as stated in the description for TRACI 2's fossil fuel depletion, ADP has many limitations, and this restriction should be understood by the BEES user. Access to the method, and to the characterization factors themselves, is provided at <http://www.cml.leiden.edu/software/data-cmlia.html>.

2.3.4 PCR Impact Categories by Product Category

Consumer demand for proof of claims that products are environmentally friendly has led to the development of what is called an EPD. An EPD is a comprehensive report that documents a product's life cycle environment impact using LCA. Although EPDs do not rank products nor indicate meeting any environmental performance criteria, EPDs are a disclosure of an LCA evaluation of the product that can better inform consumers on a product's environmental performance (UL, 2018).

Products that serve the same function are required to follow the same rules and requirements for the development of the LCA reported in an EPD, which are defined in what is called a PCR. The PCR specifies rules for all aspects of the LCA, including the required LCA method and impact categories, which vary across product categories. The goal is to standardize the process to improve the transparency and consistency of the LCA results in EPDs for a given product group or category (Subramanian, Ingwersen, Hensler, & Collie, 2012). To stay consistent with industry trends, BEES Online 2.0 includes the option of analyzing only the LCA method(s) and impact categories specified in the current PCR for a given product category. The remainder of this section will identify the LCA method impact categories required for each of the building product categories in BEES Online 2.0.

2.3.4.1 Comparability of LCAs and EPDs

Although progress in standardization has improved through PCRs, the requirements within PCRs to date still do not make it feasible to directly compare results in EPDs due to the use of different background databases, data set availabilities for materials, and allocation or other methodological rules. It is uncertain whether LCAs are comparable unless it is known that the LCA results were generated using the same data sources, boundary conditions, and other assumptions in the same software package by the same LCA practitioner.

BEES Online 2.0 is in the unique situation of meeting all these necessary conditions, allowing for a reliable direct comparison of product environmental performance across the same impact categories as defined in a product category's PCR.

2.3.4.2 Current BEES Product Categories

LCIA results have been developed for a range of products across several product categories. Table 2-3 shows the impact categories for the product categories currently in BEES 2.0 – floor coverings, interior wall and ceiling finishes (architectural coatings), partitions (gypsum board), wall and ceiling insulation, and exterior wall finishes (cladding/siding). For all product categories, five of the most common LCA-related impact categories accepted for public disclosure (i.e., in EPDs) are included:

- Global Warming Potential
- Acidification Potential
- Smog Formation/Photochemical Oxidization Potential
- Eutrophication Potential
- Ozone Depletion Potential

Additionally, primary energy consumption is required by all PCRs. Other impact categories may be required or are optional depending on the PCR. In summary, the impact methodologies used in BEES are a combination of TRACI 2.1, CML, IPCC (for GWP), and energy demand (based on CED).

Floor covering products are covered under the current PCR for EPDs - Flooring: Carpet, Resilient, Laminate, Ceramic, Wood Version 2 (NSF International, 2014), which is valid through June 23, 2019 and specifies the reporting of seven CML impact categories and two primary energy demand categories: GWP, Acidification Potential, Photochemical Oxidization, Eutrophication Potential, Ozone Depletion Potential, Abiotic Depletion Potential, Primary Energy Consumption – Non-Renewable, and Primary Energy Consumption - Renewable. TRACI impact categories can be declared but are not required.

Interior wall and ceiling finishes included in BEES are covered by the PCR for Architectural Coatings (NSF International, 2017), which is valid through June 23, 2022

and specifies the reporting of five CML impact categories: GWP, Acidification Potential, Photochemical Oxidization, Eutrophication Potential, and Ozone Depletion Potential. Additionally, Primary Energy Consumption – Non-Renewable and Primary Energy Consumption – Renewable are required.

Partitions included in BEES are covered by Product Category Rules for North American Gypsum Boards (FPInnovations, 2013), which is valid through September 30, 2018 (no update currently available) and specifies the reporting of six TRACI 2.1 impact categories: GWP, Acidification Potential, Smog Formation Potential, Eutrophication Potential, Ozone Depletion Potential, and Abiotic Depletion Potential. Additionally, Primary Energy Consumption – Non-Renewable and Primary Energy Consumption – Renewable are required.

Interior wall and ceiling insulation included in BEES are covered by “Product Category Rule (PCR) Guidance for Building-Related Products and Services – Part B: Building Envelope Thermal Insulation EPD Requirements” (UL Environment, 2018b) and “Part A: Life Cycle Assessment Calculation Rules and Report Requirements” (UL Environment, 2018a), which is valid through April 10, 2023 and specifies the reporting of seven impact categories: GWP, Acidification Potential, Smog Formation Potential, Eutrophication Potential, Ozone Depletion Potential, and Abiotic Depletion Potential.

Exterior wall finishes included in BEES are covered by “Product Category Rule (PCR) for Preparing an Environmental Product Declaration (EPD) for Product Group - Cladding System Products” (UL Environment, 2015), which is valid through June 18, 2019 and specifies the reporting of six impact categories: GWP, Acidification Potential, Smog Formation Potential, Eutrophication Potential, Ozone Depletion Potential, and Primary Energy – Fossil Fuels.

Table 2-3 PCR Impact Categories for U.S. by Current Product Category

Impact Category	Product Categories				
	Floor Coverings	Wall / Ceiling Finishes	Partitions	Wall / Ceiling Insulation	Exterior Wall Finishes
Global Warming Potential	CML (TRACI*)	TRACI**	TRACI**	TRACI	TRACI**
Ozone Depletion Potential	CML (TRACI*)	TRACI or CML	TRACI	TRACI	TRACI (CML*)
Eutrophication Potential	CML (TRACI*)	TRACI or CML	TRACI	TRACI	TRACI (CML*)
Acidification Potential	CML (TRACI*)	TRACI or CML	TRACI	TRACI	TRACI (CML*)
Smog Formation / Photochemical Oxidization Potential	CML (TRACI*)	TRACI or CML	TRACI	TRACI	TRACI (CML*)
Abiotic Depletion Potential	CML		CML†	CML†	TRACI (CML*)
Primary Energy Consumption				CED	CED
Primary Energy Consumption (non-renewable)	CED	CED	CED	CED	CED
Primary Energy Consumption (renewable)	CED	CED	CED	CED	CED

* Optional Reporting Impact Category
 ** TRACI GWP uses the most recent IPCC (AR5) and is consistent with PCRs with IPCC as optional or required.
 † PCR states the use of TRACI 2.1 but requires ADP, which is not included in the TRACI method.
Note 1: Water, Land, Human Health, and Ecological Toxicity Categories are currently not required for any BEES product category PCRs.
Note 2: TRACI Fossil Fuel Depletion impact category is replaced with Primary Energy Consumption

2.3.4.3 Future Product Categories

Over the next year, LCIA results will be developed for a range of products across several product categories. Table 2-4 shows the impact categories for the product categories that are expected – wall and roof sheathing, roof coverings, paving, beams, columns, and basement walls - to be included in BEES Online 2.1, and the impact category requirements specified in the applicable PCR.

Wall and roof sheathing included in BEES are covered by “PCR for preparing an EPD - North American Structural and Architectural Wood Products” (FPInnovations, 2015), which is an interim release valid through December 31, 2018 and specifies the reporting of 5 impact categories (impact method unspecified): GWP, Acidification Potential, Smog Formation Potential, Eutrophication Potential, and Ozone Depletion Potential. Additionally, Primary Energy Consumption – Total, Primary Energy Consumption – Non-Renewable, and Primary Energy Consumption – Renewable are also required.

Paving included in BEES are covered by two PCRs, one for asphalt and another for concrete. “PCR for Asphalt Mixtures” (NAPA, 2017) is valid through January 2022

while “PCR for ISO 14025 Type III EPDs – Concrete” (PE International, 2013) is valid through September 2018. Both PCRs specify the reporting of five TRACI impact categories: GWP, Acidification Potential, Smog Formation Potential, Eutrophication Potential, and Ozone Depletion Potential. Primary Energy Consumption – Total, Primary Energy Consumption – Non-Renewable, and Primary Energy Consumption – Renewable are also required.

Beams, columns, and basement walls included in BEES are covered by “PCRs for ISO 14025 Type III EPDs – Concrete” (PE International, 2013), which is valid through September 2018 and specifies the reporting of five TRACI impact categories: GWP, Acidification Potential, Smog Formation Potential, Eutrophication Potential, and Ozone Depletion Potential. Primary Energy Consumption – Total, Primary Energy Consumption – Non-Renewable, and Primary Energy Consumption – Renewable are also required.

Roof coverings included in BEES are covered by “PCRs for preparing an EPD for Product Group - Asphalt Shingles, Built-up Asphalt Membrane Roofing and Modified Bituminous Membrane Roofing” (ASTM, 2014), which is valid through June 2019 and specifies the reporting of five TRACI impact categories: GWP, Acidification Potential, Smog Formation Potential, Eutrophication Potential, and Ozone Depletion Potential. Primary Energy Consumption – Total, Primary Energy Consumption – Non-Renewable, and Primary Energy Consumption – Renewable are also required.

Table 2-4 PCR Impact Categories by Future Product Category

Impact Category	Wall / Roof Sheathing	Product Categories Roof Coverings	Paving†	Beams, Columns, Basement Walls, & Slab on Grade
Global Warming Potential	TRACI or CML	TRACI	TRACI	TRACI (CML*)
Ozone Depletion Potential	TRACI or CML	TRACI	TRACI	TRACI (CML*)
Eutrophication Potential	TRACI or CML	TRACI	TRACI	TRACI (CML*)
Acidification Potential	TRACI or CML	TRACI	TRACI	TRACI
Smog Formation / Photochemical Oxidization Potential	TRACI or CML	TRACI	TRACI	TRACI
Abiotic Depletion Potential				
Primary Energy Consumption	CED		CED	CED
Primary Energy Consumption (non-renewable)	CED	CED	CED	CED
Primary Energy Consumption (renewable)	CED	CED	CED	CED
* Optional Reporting Impact Category				
† Asphalt PCR does not include an option to include CML impact categories. Therefore all paving (asphalt and concrete) products do not include the CML reporting option found in other categories with concrete-based products.				
Note: Water, Land, Human Health, and Ecological Toxicity Categories are currently not required for any				

2.3.4.4 Dynamics of Product Manufacturing and PCRs

The dynamic nature of PCRs, and LCIA more generally, is an important factor to consider when using and interpreting BEES results. New LCA methodologies, data, processes, and impact categories are developed on an almost continuous basis. Additionally, PCRs are regularly updated at a minimum of every 5 years. Depending on the PCR update cycle and the changes implemented in those updates, the impact categories and/or the process in developing the impact category results may differ from those used in BEES LCIA development. NIST will do its best to update product categories soon after the publication of a new PCR given its labor and funding constraints. Table 2-5 shows the timeline of PCR expiration and associated BEES product category update plans. Note that NIST is currently evaluating funding availability and allocation across its different activities in measuring sustainability in buildings (i.e., BEES, BIRDS - Building Industry Reporting and Design for Sustainability, and BIRDS NEST - Neutral Environment Software Tool). NIST will work with industry organizations to be aware of developments in PCR updates to ensure timely corresponding updates to BEES.

Table 2-5 PCR Publication Timeline⁶

Product Category	Timeline			
	PCR Publication Year	PCR Expiration Date	Last BEES Update	Planned BEES Update
Floor Coverings	2014	Jun 23, 2019	2016	2021
Wall / Ceiling Finishes	2017	Jun 23, 2022	2018	TBD
Partitions	2013	Sep 30, 2018	2018	TBD
Wall / Ceiling Insulation	2018	Feb 2023	2018	TBD
Exterior Wall Finishes	2014	Jun 18, 2019	2018	TBD
Wall / Roof Sheathing	2013	Dec 31, 2018	2019*	TBD
Roof Coverings	2014	Jun 2019	2019*	TBD
Paving (Asphalt/Concrete)	2017 / 2013	Jan 2022 / Dec 2018	2019*	TBD
Beams	2013	Dec 2018	2019*	TBD
Columns	2013	Dec 2018	2019*	TBD
Basement Walls	2013	Dec 2018	2019*	TBD
Slab on Grade	2013	Dec 2018	2019*	TBD

* Update in Progress or Planned

2.4 Impact Interpretation

Once impacts have been classified and characterized, the resulting LCIA metrics are expressed in incommensurate units, for example: GWP in CO₂-eq, acidification in SO₂-

⁶ Up to date at the time of publication of this user guide.

equivalents, etc. To assist in the next LCA step, interpretation, these metrics need to be placed on the same scale and are rectified through normalization.

2.4.1 Category Normalization and Aggregation Methodology

The EPA has developed “normalization references” corresponding to its TRACI 2 set of impact assessment methods (Bare et al., 2006). These U.S. data are updated and expanded for use in BEES. Shown in Table 2-6, these values quantify the U.S. economy’s annual contributions to each impact category. As such, they represent a “U.S. impact yardstick” against which to evaluate the *significance* of product-level impacts. Details on the majority of the normalization factors can be found in Ryberg (2014), which are the most recent updated factors for TRACI. The land, primary energy, and water use normalization factors are based on total U.S. land area (CIA, 2018), total U.S. primary energy consumption in 2017 (EIA, 2018), and total U.S. fresh water consumption in 2015 (USGS, 2018), respectively.

Normalization is accomplished by dividing BEES product-level impact assessment results by the fixed U.S.-scale normalization references, expressed in the same units, yielding an impact category score for a building that has been placed in the context of annual U.S. contributions to that impact. By placing each product-level impact result in the context of its associated U.S. impact result, the measures are all reduced to the same scale, allowing comparison across impacts.

The environmental impact of a single product is small relative to the total U.S. impact in a category, leading to normalized values that are small fractions of a percent. To improve the user experience, BEES Online 2.0 adjusts these normalized values by multiplying by the U.S. population (~308.7 million) (US Census, 2018), creating a normalized value that represents the fraction of U.S. emissions per capita for each impact category.

Table 2-6 BEES Normalization References

Impact Category	U.S. Total per Year	Units	Source
Global Warming	7.4 E+12	kg CO ₂ eq	Ryberg (2014)
Primary Energy Consumption – Non-Renewable	2.963E+13 (9.16E+13)	kWh (MJ)	EIA (2018)
Primary Energy Consumption - Renewable	3.764E+12 (1.16E+13)	kWh (MJ)	EIA (2018)
HH Criteria Air	7.4 E+10 ⁹	kg PM _{2.5} eq	Ryberg (2014)
HH Cancer*	1.57E+04	CTUcanc.	Ryberg (2014)
Water Consumption	3.883E+14 (1.026E+14)	L (gal)	USGS (2018)
Ecological Toxicity*	3.32E+12	CTUe	Ryberg (2014)
Eutrophication	6.6E+09	kg N eq	Ryberg (2014)
Land Use	9.15E+12 (2.26E+09)	m ² (acre)	CIA (2018)
HH Non-cancer*	3.21E+05	CTU _{non-canc.}	Ryberg (2014)
Smog Formation	4.2E+11	kg O ₃ eq	Ryberg (2014)
Acidification	2.8E+10	kg SO ₂ eq	Ryberg (2014)
Ozone Depletion	4.9E+07	kg CFC-11 eq	Ryberg (2014)
Indoor Air Quality	1.08E+10	kg VOC	NIST (2010)
U.S. Population (2010)	3.087E+8	people	US Census (2018)

* Sum of 2 subcategories
Note: Both SI and IP units are included for impact categories when applicable.

At the BEES LCA interpretation step, a building’s normalized impact scores are evaluated. The midpoint-level impact assessment yields values for twelve impact categories, making interpretation at this level difficult. To enable comparisons across buildings, the scores across impact categories may be synthesized. Note that in BEES, the synthesis of impact scores is optional.

Impact scores may be synthesized by weighting each impact category by its relative importance to overall environmental performance, then computing the weighted average impact score. In BEES, the set of importance weights is selected by the user. Several alternative weight sets are provided as guidance and may be either used directly or as a starting point for developing user-defined weights. The alternative weight sets are based on an EPA Science Advisory Board study, a BEES Stakeholder Panel’s structured judgments, a set of equal weights, and a set exclusively focusing on the climate change impact, representing a spectrum of ways in which people value diverse aspects of the environment.

At this time BEES does not report any uncertainty analysis. Uncertainty exists in all levels of LCA, from the data source to the elementary flows to the characterization into impact categories to impact category normalization factors. NIST is evaluating the inclusion of uncertainty analysis into future releases of BEES.

2.4.2 EPA Science Advisory Board Study

In 1990 and again in 2000, EPA's Science Advisory Board (SAB) developed lists of the relative importance of various environmental impacts to help EPA best allocate its resources (U.S. EPA Science Advisory Board, 1990, 2000). The following criteria were used to develop the lists:

- The spatial scale of the impact
- The severity of the hazard
- The degree of exposure
- The penalty for being wrong

Ten of the twelve BEES impact categories were covered by the SAB lists of relative importance:

- Highest-Risk Problems: climate change, land use
- High-Risk Problems: ecological toxicity, human health (cancer and non-cancer effects)
- Medium-Risk Problems: ozone depletion, smog, acidification, eutrophication, and human health – criteria air pollutants

The SAB did not explicitly consider primary energy consumption or water consumption. For BEES, these impacts are assumed to be relatively medium-risk and low-risk problems, respectively, based on other relative importance lists (Levin, 1996).

Verbal importance rankings, such as "highest risk," may be translated into numerical importance weights by following ASTM International standard guidance for applying a Multi-attribute Decision Analysis method known as the Analytic Hierarchy Process (AHP) (ASTM, 2011). The AHP methodology suggests the following numerical comparison scale:

- 1 Two impacts contribute equally to the objective (in this case environmental performance)
- 3 Experience and judgment slightly favor one impact over another
- 5 Experience and judgment strongly favor one impact over another
- 7 One impact is favored very strongly over another, its dominance demonstrated in practice
- 9 The evidence favoring one impact over another is of the highest possible order of affirmation

*2, 4, 6, and 8 can be selected when compromise between values of 1, 3, 5, 7, and 9, is needed.

Through an AHP known as pairwise comparison, numerical comparison values are assigned to each possible pair of environmental impacts. Relative importance weights can then be derived by computing the normalized eigenvector of the largest eigenvalue of the

matrix of pairwise comparison values. Table 2-7 and Table 2-8 list the pairwise comparison values assigned to the verbal importance rankings, and the resulting SAB importance weights computed for the BEES impacts, respectively. Note that the pairwise comparison values were assigned through an iterative process based on NIST’s background and experience in applying the AHP technique. Furthermore, while the SAB evaluated cancer and non-cancer effects as a group, the resulting 13 % weight was apportioned between the two based on the relative judgments of the BEES Stakeholder Panel discussed in the next section.

Table 2-7 Pairwise Comparison Values for Deriving Impact Category Importance Weights

Verbal Importance Comparison	Pairwise Comparison Value
Highest vs. Low	6
Highest vs. Medium	3
Highest vs. High	1.5
High vs. Low	4
High vs. Medium	2
Medium vs. Low	2

Table 2-8 Relative Importance Weights based on Science Advisory Board Study

Impact Category	Relative Importance Weight (%)
Climate Change	18
Primary Energy Consumption	7
HH Criteria Air	7
HH Cancer	8
Water Consumption	3
Ecological Toxicity	12
Eutrophication	5
Land Use	18
HH Non-cancer	5
Smog Formation	7
Acidification	5
Ozone Depletion	5

2.4.3 BEES Stakeholder Panel Judgments

While the derived EPA SAB-based weight set is helpful and offers expert guidance, several interpretations and assumptions were required to translate SAB findings into numerical weights for interpreting LCA-based analyses. A more direct approach to weight development would consider a closer match to the context of the application; that is, environmentally preferable purchasing in the United States based on life cycle impact assessment results, as reported by BEES.

To develop such a weight set, NIST assembled a volunteer stakeholder panel that met at its facilities in Gaithersburg, Maryland, for a full day in May 2006. To convene the panel,

invitations were sent to individuals representing one of three “voting interests:” producers (e.g., building product manufacturers), users (e.g., green building designers), and LCA experts. Nineteen individuals participated in the panel: seven producers, seven users, and five LCA experts. These “voting interests” were adapted from the groupings ASTM International employs for developing voluntary standards, to promote balance and support a consensus process.

The BEES Stakeholder Panel was led by Dr. Ernest Forman, founder of the AHP firm Expert Choice Inc. Dr. Forman facilitated panelists in weighting the BEES impact categories using the AHP pairwise comparison process. The panel weighted all impacts in the Short Term (0 years to 10 years), Medium Term (10 years to 100 years), and Long Term (>100 years). One year’s worth of U.S. flows for each pair of impacts was compared, with respect to their contributions to environmental performance. For example, for an impact comparison over the Long Term, the panel evaluated the effect that the current year’s U.S. emissions would have more than 100 years hence.

Once the panel pairwise-compared impacts for the three time horizons, its judgments were synthesized across the selected time horizons. Note that when synthesizing judgments across voting interests and time horizons, all panelists were assigned equal importance, while the short, medium, and long-term time horizons were assigned by the panel to carry 24 %, 31 %, and 45 % of the weight, respectively.

The environmental impact importance weights developed through application of the AHP technique at the facilitated BEES Stakeholder Panel event are shown in Table 2-9. These weights reflect a synthesis of panelists’ perspectives across all combinations of stakeholder voting interest and time horizon. The weight set draws on each panelist’s personal and professional understanding of, and value attributed to, each impact category. While the synthesized weight set may not equally satisfy each panelist’s view of impact importance, it does reflect contemporary values in applying LCA to real world decisions. This synthesized BEES Stakeholder Panel weight set is offered as an option in BIRDS online.

The panel’s application of the AHP process to derive environmental impact importance weights is documented in an appendix to Gloria, Lippiatt, and Cooper (2007), ASTM (2011), and ASTM (2016).

Table 2-9 Relative Importance Weights based on BEES Stakeholder Panel Judgments

Impact Category	Relative Importance Weight (%)
Climate Change	29
Primary Energy Consumption	10
HH Criteria Air	9
HH Cancer	8
Water Consumption	8
Ecological Toxicity	7
Eutrophication	6
Land Use	6
HH Non-cancer	5
Smog Formation	4
Acidification	3
IAQ	3
Ozone Depletion	2

The three figures below display in graphical form the BEES Stakeholder Panel weights used in BEES. Figure 2-3 displays the synthesized weight set. Figure 2-4 displays the weights specific to panelist voting interest, and Figure 2-5 displays the weights specific to time horizon. The BEES user is free to interpret results using either of the weight sets displayed in Figure 2-4 and Figure 2-5 or by entering them as a user-defined weight set.

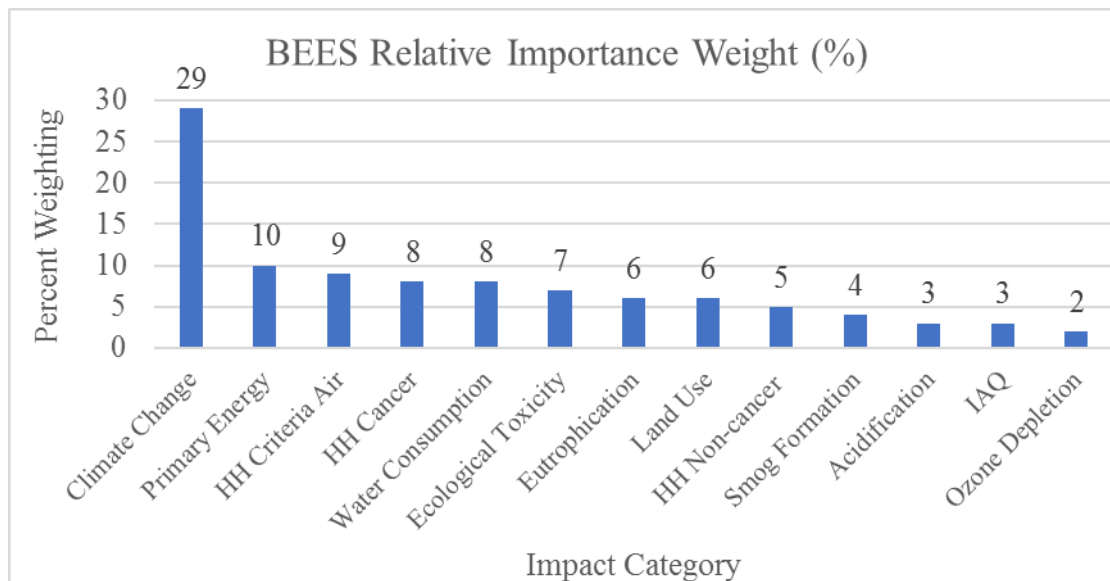


Figure 2-3 BEES Stakeholder Panel Importance Weights Synthesized across Voting Interest and Time Horizon

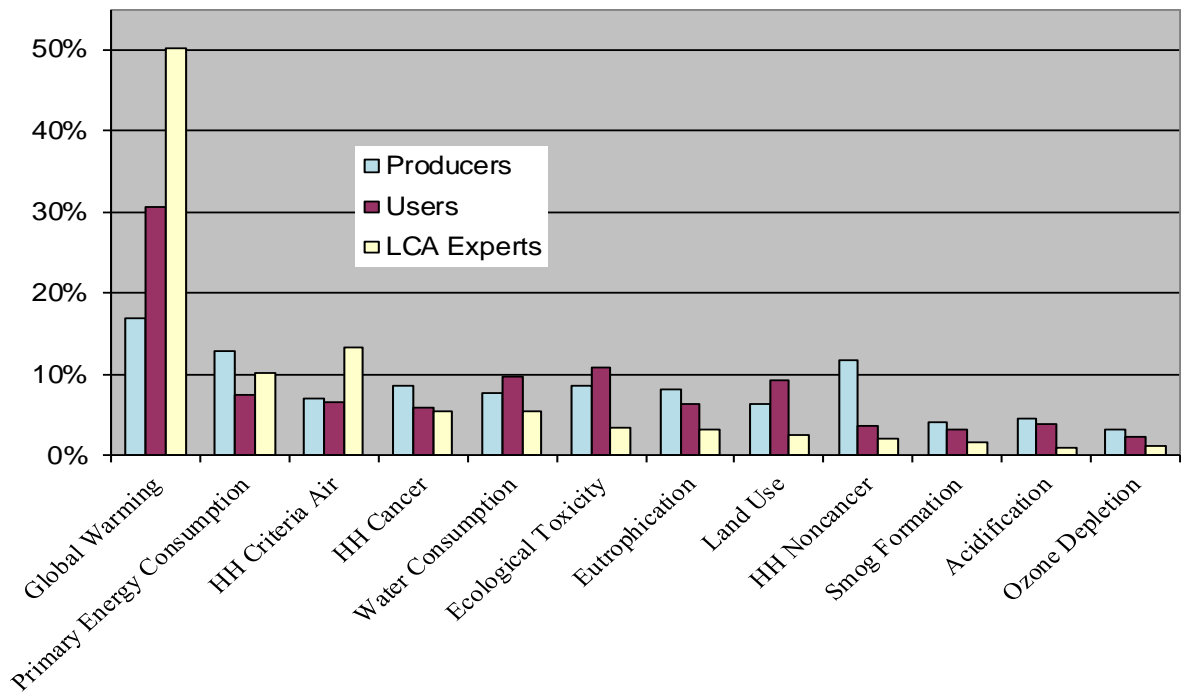


Figure 2-4 BEES Stakeholder Panel Importance Weights by Stakeholder Voting Interest

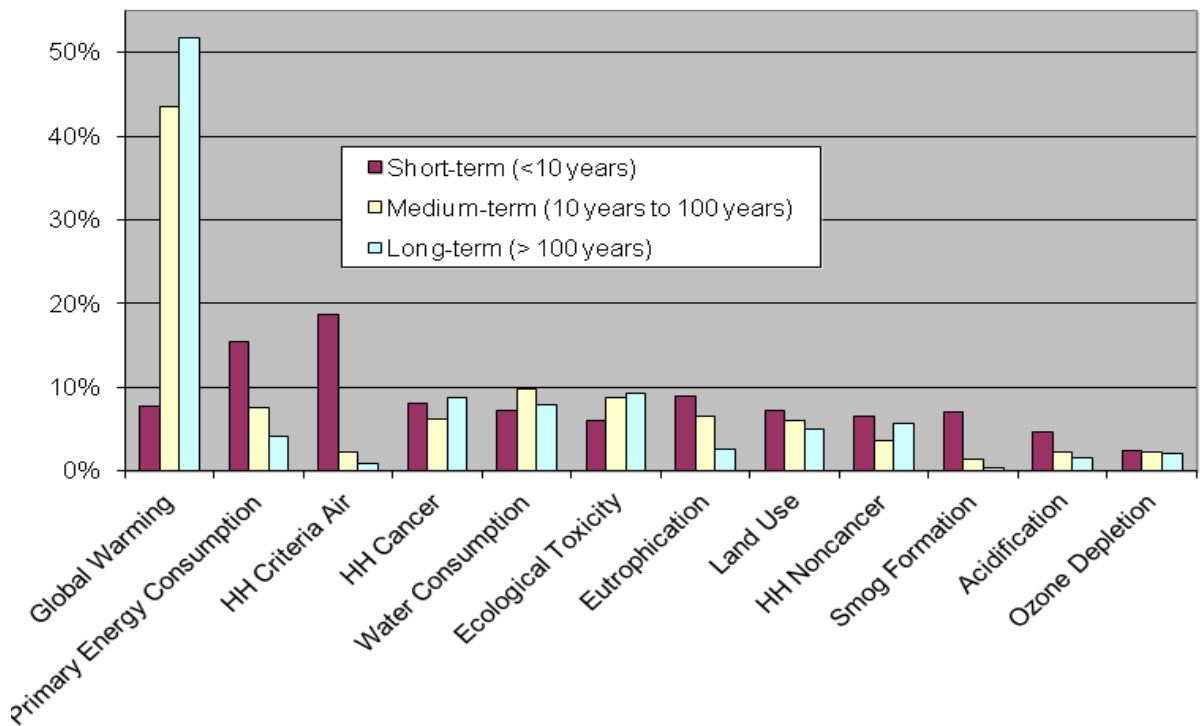


Figure 2-5 BEES Stakeholder Panel Importance Weights by Time Horizon

3 Economic Performance

Measuring the economic performance of building products is more straightforward than measuring environmental performance. Published economic data are readily available, and there are well-established ASTM standard methods for conducting economic performance evaluations. The most appropriate method for measuring the economic performance of building products is the LCC method (Fuller & Petersen, 1996). BEES follows the ASTM standard method for life cycle costing of building-related investments (ASTM, 2017).

3.1 Study Period

It is important to distinguish between the time periods used to measure environmental performance and economic performance. These time periods are different. Recall that in environmental LCA, the time period begins with raw material acquisition and ends with product end-of-life. Economic performance, on the other hand, is evaluated over a fixed period (known as the study period) that begins with the purchase and installation of the product and ends at some point in the future that does not necessarily correspond with product end-of-life.

Economic performance is evaluated beginning at product purchase and installation because this is when out-of-pocket costs begin to be incurred, and investment decisions are made based upon out-of-pocket costs. The study period ends at a fixed date in the future. For a private investor, its length is set at the period of product or facility ownership. From a societal perspective, the study period length is often set at the useful life of the longest-lived product alternative. However, when alternatives have very long lives, (e.g., more than 60 years), a shorter study period may be selected for three reasons:

- Technological obsolescence occurs before the end of the product life
- Data for future costs become too uncertain
- Costs in the distant future are of lower importance than costs now or in the near future

In the BEES model, economic performance is measured over a 60-year study period. This study period is selected to reflect a reasonable time over which to evaluate economic performance for society. The same 60-year period is used to evaluate all products, even if they have different useful lives. The LCC method allows for considering the useful life of each product to be the same. It accounts for the fact that different products have different useful lives by evaluating them over the same study period.

For consistency, the BEES model evaluates the use stage of environmental performance over the same 60-year study period. Product replacements over this 60-year period are accounted for in the life cycle inventory analysis, and end-of-life inventory flows are prorated to year 60 for products with lives longer than the 60-year study period.

3.2 Life Cycle Costing

The LCC method sums over the study period all relevant costs associated with a product. Alternative products for the same function, say floor covering, can then be compared based on their LCCs to determine which is the least cost means of fulfilling that function over the study period. Categories of cost typically include costs for purchase, installation, operation, maintenance, repair, and replacement. The residual value is the product value remaining at the end of the study period and is, therefore, a negative cost value. In the BEES model, the residual value is computed by prorating the purchase and installation cost over the product life remaining beyond the 60-year period.

The total LCC of a product (C_{LCC}) is the sum of the present values of first cost (C_{First}) and future costs (C_{Future}) minus the residual value (RV) as shown in the following equation:

$$C_{LCC} = C_{First} + C_{Future} - RV$$

3.3 Discount Rate

The LCC method accounts for the time value of money by using a discount rate to convert all future costs to their equivalent present value. Future costs must be expressed in terms consistent with the discount rate. There are two approaches. First, a *real* discount rate may be used with constant-dollar costs. Real discount rates reflect the portion of the time value of money attributable to the real earning power of money over time and not to general price inflation. Even if all future costs are expressed in constant dollars, they must be discounted to reflect this portion of the time-value of money. Second, a *market (nominal)* discount rate may be used with current-dollar amounts (e.g., actual future prices). Market discount rates reflect the time value of money stemming from both inflation and the real earning power of money over time. When applied properly, both approaches yield the same LCC results. The BEES model computes LCCs using constant dollars and a real discount rate.

As a default, BEES offers a real rate of 3.0 %, the 2018 real discount rate for DOE energy efficiency, water conservation, and renewable energy project evaluation (Lavappa & Kneifel, 2018) and the “social rate of time preference” (OIRA, 2011; OMB, 2003).

Lavappa and Kneifel (2018) sets the real discount rate at 3 % based on the process defined in 10 CFR 436, which is the higher of two values: (1) The real discount rate calculated using long-term Treasury Bond rates averaged over 12 months and the general inflation rate published in the Report of the President’s Economic Advisors, Analytical Perspectives (OMB, 2017) or (2) a prescribed floor of 3 %. The calculated real discount rate has been lower than the prescribed floor of 3 % for the past 10+ years.

Circular A-4 assumes that “the rate that the average saver uses to discount future consumption is a measure of the social rate of time preference, the real rate of return on long-term government debt may provide a fair approximation” and determines the 3 %

real discount rate based on the average real annual terms on a pre-tax basis for 1973 to 2003 (OMB, 2003).

Given that the 3 % discount rates using either Circular A-4 or 10 CFR 436 are based on either dated data (15+ years old) or a prescribed floor that does not capture the current economic conditions, it may be appropriate to select an alternative discount rate. For example, Appendix C of Circular A-94 (OMB, 1992) is updated annually to specify the real discount rates applicable to general capital investments based on Treasury Notes and Bonds with maturities from 3 years to 30 years. For 2018, those rates vary from -0.5 % for 3 years to 0.7 % for 30 years (Lavappa & Kneifel, 2018). After accounting for inflation, real discount rates may be near or below 0.0 % depending on the study period.

Another alternative is the “historical average before-tax rate of return to private capital in the U.S. economy,” which Circular A-4 estimates to be 7.0 % (OMB, 2003). This value is consistent with what has been termed at “Siegel’s Constant” of real returns from the stock market of 6.5 % (Wright et al., 2011).

Circular A-4 also recommends a lower discount rate in the case of longer-term decision-making that includes intergenerational impacts, in which case “the agency might consider a sensitivity analysis using a lower but positive discount rate, ranging from 1 percent to 3 percent, in addition to calculating net benefits using discount rates of 3 percent and 7 percent” (OIRA, 2011).

The approaches thus far have been focused on financial markets (i.e., stocks and bonds). Another approach to estimate a discount rate is to develop an implied social discount rate using time preference, risk/inequality aversion, and expected growth rate using the Ramsey Rule (NAS, 2017). The literature using this approach have estimates of the implied long-term social discount rate ranging from 1.4 % to 6.0 % depending on the study (NAS, 2017).

Aggregated average discount rates discussed above range from -0.5 % to 7.0 %. However, a BEES user may have a different personal real discount rate than the estimated or prescribed social or economy-wide discount rates because personal preferences can vary significantly from person to person. Studies have found some real personal discount rates can vary from 0 % to 30 % with many finding average personal discount rates higher than 7.0 % depending on the specific demographics, magnitude of the trade-off values, and topic and approach in the study (Alberini & Chiabai, 2007; Cameron & Gerdes, 2002; Moore & Viscusi, 1990; Scharff & Viscusi, 2011; Warner & Pleeter, 2001). Therefore, it is important for the BEES user to consider the purpose of the analysis and select an appropriate discount rate.

3.4 Cost of Carbon

An optional addition to the economic analysis is the inclusion of a cost of GHG emissions in CO_{2e} (referred to as “carbon” moving forward) into the BEES LCCA. If a user decides to include a cost of carbon into their LCCA, BEES provides the ability for

the user to customize their estimates’ marginal value of damages to society, or the “social cost of carbon” (SCC). BEES currently uses a fixed price for all GHG emissions measured by the GWP impact category (CO_{2e} emissions) regardless of whether the emissions are embodied in the product itself or the use phase. However, the SCC has been projected to rise over time. Future versions of BEES could introduce time varying prices if deemed beneficial to users.

BEES does not give any recommendations on the appropriate cost of carbon for any given user to apply to their analysis. However, BEES does provide a default value of \$12/ton, which is based on the most conservative average SCC estimate for 2010 published in the United States Government Interagency Working Group on Social Cost of Greenhouse Gasses (Working Group on Social Cost of Carbon, 2016). A user can choose to use the default value or input their own desired value. In case of the latter, numerous resources are discussed in the remainder of this section.

Working Group on Social Cost of Carbon (2016) provides distributions of SCC estimates (2007 US dollars) assuming different discount rates: 5 %, 3 %, and 2.5 %. Table 3-1 shows the average SCC values for each discount rate in 5-year increments adjusted to 2018 dollars by multiplying by the Consumer Price Index (CPI) factor = 1.2161 (Alioth, 2018). A 4th value, the 95th percentile value for the 3 % discount rate case is an example of a high SCC scenario. The estimate distributions have a left-skewed distribution with long right tails. Please see Working Group on Social Cost of Carbon (2016) for more detailed information on these distributions.

Table 3-1 Social Cost of Carbon Estimates

SCC Per Metric Ton (2018 US dollars)				
Year	Average Price			95th Pct
	5%	3%	2.5%	3%
2010	\$12	\$38	\$61	\$105
2015	\$13	\$44	\$68	\$128
2020	\$15	\$51	\$75	\$150
2025	\$17	\$56	\$83	\$168
2030	\$19	\$61	\$89	\$185
2035	\$22	\$67	\$95	\$204
2040	\$26	\$73	\$102	\$223
2045	\$28	\$78	\$108	\$240
2050	\$32	\$84	\$116	\$258
CPI Inflation Factor (2007 to 2018) = 1.2161				

GHGs are global pollutants, and therefore the marginal reduction in damages from GHG reductions may be comparable around the world. The current CO₂ market prices in Emissions Trading Systems (ETSs) in the U.S. and around the world may be useful proxies for estimating the SCC for a BEES user. Within the U.S., the first carbon market created was the Regional Greenhouse Gas Initiative (RGGI) in the Northeast with auction prices ranging from ~\$2.50/ton to ~\$5.00/ton in 2017 and 2018 (RGGI, 2018).

The other carbon market is the California Cap-and-Trade Program, which had clearing auction prices in 2018 range from \$14.61/ton to \$15.05/ton (CARB, 2018).

The most well-known carbon market in the world is the EU ETS. Figure 3-1 shows that the EU allowance (EUA) prices have historically been below \$10/ton until a recent rise over 2018 to ~\$20/ton in September (Sandbag, 2018).

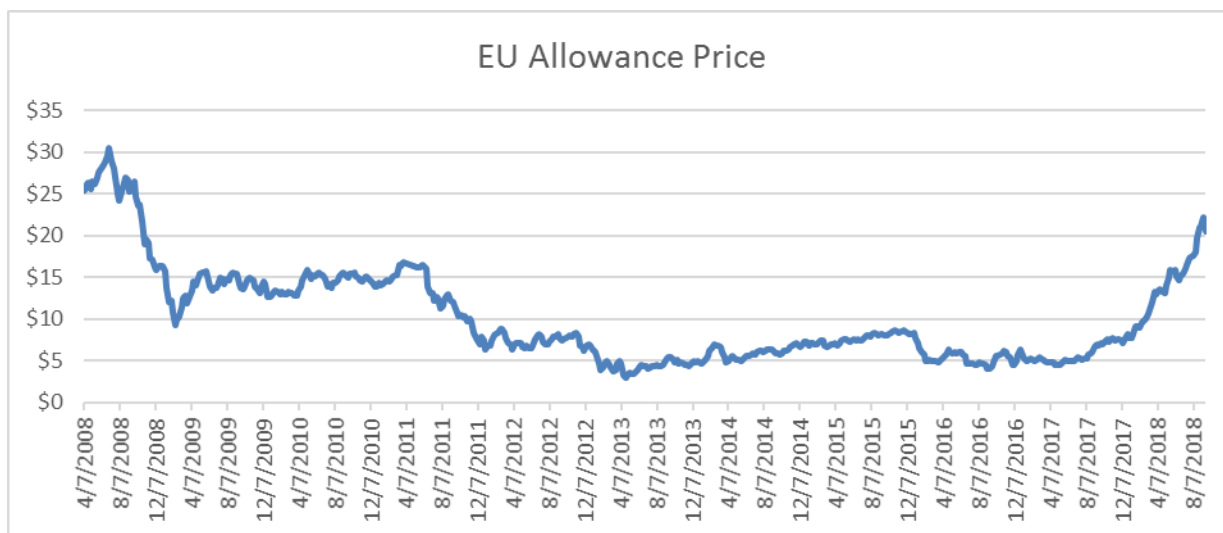


Figure 3-1 EU ETS GHG Allowance Price (April 2008 through September 2018)

Worldwide, there are 42 national jurisdictions (i.e., countries) and 25 subnational jurisdictions (i.e., states, provinces, or cities) with a carbon tax or carbon ETS (World Bank, 2018). As of 2016, the prices in these ETSs around the world ranged from \$13/ton to \$31/ton in 2016 US dollars (CDP, 2016). More recent data are published in World Bank Group (2018) in 2018 US dollars. In Canada, carbon ETS prices range from \$15/ton to \$23/ton depending on the province. Many European countries, along with their participation in the EU ETS, also have carbon taxes that range from \$8/ton (Portugal) to \$139/ton (Sweden). Japan has a \$3/ton carbon tax while Tokyo’s ETS carbon price is \$6/ton. Korea’s ETS carbon price is \$21/ton. China has implemented pilot ETS at the city level, with current carbon prices of \$2/ton to \$9/ton. To research current carbon pricing schemes around the world, please see World Bank (2018).

Many private companies have begun to include carbon pricing into their business strategies, either through their own SCC estimates or based on the market prices in the carbon market that applies to their location (CDP, 2016). The estimates used by corporations vary significantly across and within countries. For example, U.S. companies have disclosed using carbon prices ranging from \$1/ton to \$150/ton (CDP, 2016). These price differences are driven by, among other things, the likelihood of regulation facing a firm’s market sector as well as differences in their short-term versus long-term perspectives.

In summary, the selection of an appropriate SCC for a BEES user is dependent on their preferences, which could lead to prices anywhere from \$0/ton to \$150+/ton.

3.5 Default Cost Data Sources

Cost data are collected from several data sources. For specific product lines, the publicly available suggested retail price is assumed for the cost of the product. For generic or industry average product cost data, RS Means and Whitestone cost databases or industry group suggested prices were used. The same databases were used to estimate the cost of installing each product. Replacement costs are assumed to be identical to the installed cost (product plus installation cost) of the product. Industry interviews are used to supplement these data sources to ensure realistic cost estimates. No costs are incorporated for maintenance during the use phase or the cost of removing the product at the end of its service life.

BEES users are recommended to adjust the installed cost values based on their specific cost information.

4 BEES Product Summary

This chapter gives an overview of the product category formatting implemented in BEES (UNIFORMAT II) and the current and future product categories available in the current version of BEES.

4.1 UNIFORMAT II

All BEES product categories are defined using UNIFORMAT II, which is a standard classification for building-related elements defined in ASTM Standard E1557 (ASTM, 2015e). Individual building elements are aggregated into “groups” and “major groups” as shown in Table 4-1.

Table 4-1 UNIFORMAT II Major Group and Group Elements

UNIFORMAT Elements	
Major Group Element	Group Element
Substructure	Foundations
	Basement Construction
Shell	Superstructure
	Exterior Enclosure
	Roofing
Interiors	Interior Construction
	Stairs
	Interior Finishes
Services	Conveying
	Plumbing
	HVAC
	Fire Protection
	Electrical
Equipment & Furnishings	Equipment
	Furnishings
Special Construction & Demolition	Special Construction
	Selective Building Demolition
Building Sitework	Site Preparation
	Site Improvements
	Site Mechanical Utilities
	Site Electrical Utilities
	Other Site Construction

4.2 BEES Product Categories

Table 4-2 shows the BEES product categories by individual element, group element, and major element sorted by the elements included in BEES Online 2.0, the planned elements to be added in BEES Online 2.1, and the elements not yet updated that are in the original

version of BEES Online. Note that some discretion has been used in identifying the appropriate individual element for a given product (e.g., all pipes and fittings have been grouped together in a single element for this document).

This publication is available free of charge from: <https://doi.org/10.6028/NIST.TN.2032>

Table 4-2 BEES Product Categories by UNIFORMAT Element

		UNIFORMAT Elements*		
	Major Group Element	Group Element	Individual Element	Data Year
BEES Online 2.0 (75 Products)	Interiors	Interior Finishes	Floor Coverings	2016
	Interiors	Interior Finishes	Wall Finishes to Interior Walls	2018
	Interiors	Interior Finishes	Ceiling Finishes	2018
	Interiors	Interior Construction	Partitions/Gypsum Board	2018
	Shell	Exterior Enclosure	Wall Insulation	2018
	Shell	Roofing	Ceiling Insulation	2018
	Shell	Roofing	Roof Coatings	2018
BEES Online 2.1 (300+ Products Under Development)	Shell	Roofing	Roof coverings	2019
	Shell	Exterior Enclosure	Wall Sheathing	2019
	Shell	Superstructure	Beams	2019
	Shell	Superstructure	Columns	2019
	Shell	Superstructure	Roof Sheathing	2019
	Building Sitework	Site Improvements	Parking Lot Paving	2019
Substructure	Foundations	Slab on Grade	2019	
	Basement Construction	Basement Walls	2019	
Remaining in BEES Online (Categories not installed in a building and/or have few products)	Equipment & Furnishings	Furnishings	Chairs	N/A
	Equipment & Furnishings	Furnishings	Fixed Casework	N/A
	Equipment & Furnishings	Furnishings	Table Tops, Counter Tops, Shelving	N/A
	Domestic Water Distribution	Hot & Cold Water Distribution	Pipes & Fittings	N/A
	Building Repair & Remodeling	Remodeling Products	Adhesive or Mastic Remover	N/A
	Building Sitework	Site Electrical Utilities	Transformer oil	N/A
	Building Sitework	Site Improvements	Fertilizer	N/A
	Building Sitework	Site Improvements	Site Development (Fences & Gates)	N/A
	Building Sitework	Site Improvements	Site Development (Railings)	N/A
	Building Sitework	Site Improvements	Roadway Dust Control	N/A
	Building Maintenance	Cleaning Products	Carpet Cleaners	N/A
	Building Maintenance	Cleaning Products	Floor strippers	N/A
	Building Maintenance	Cleaning Products	Bath and tile cleaner	N/A
	Building Maintenance	Cleaning Products	Glass cleaners	N/A
	Building Maintenance	Cleaning Products	Grease and graffiti remover	N/A
	Services	Plumbing	Plumbing Fixtures	N/A
Interiors	Interior Construction	Lockers	N/A	
Interiors	Fittings	Fabricated Toilet Partitions	N/A	
Sanitary Waste	Drain/Waste/Vent	Piping	N/A	
Shell	Roofing	Roof Coatings	N/A	
Shell	Exterior Enclosure	Exterior Sealers & Coatings	N/A	
Shell	Exterior Enclosure	Framing	N/A	
Shell	Exterior Enclosure	Trim	N/A	

*Updates have been made to the individual elements and may not match exactly to BEES Online 1.0 categories.

The functional unit and use phase options (if appropriate) for each product category are shown in Table 4-3. Note that the functional unit of the old product categories may be changed in BEES Online 2.0 relative to the original BEES Online categories if deemed appropriate.

Table 4-3 BEES Product Category Functional Unit and Use Phase Options

Version	Product Category	Functional Unit	Use Phase Options
BEES Online 2.0	Floor Coverings	0.093 m ² (1 ft ²)	Vacuum, Sweep / Dry Mop
	Gypsum Board	0.093 m ² (1 ft ²)	None
	Wall & Ceiling Insulation	R-1 per 0.093 m ² (1 ft ²)	None
	Interior Wall & Ceiling Finishes	Sealing/coating 0.093 m ² (1 ft ²)	None
BEES Online 2.1	Roof coverings	9.29 m ² (100 ft ²)	None
	Beams & Columns	0.76 m ³ (1 yd ³)	None
	Basement Walls & Slabs	0.76 m ³ (1 yd ³)	None
	Parking Lot Paving	0.76 m ³ (1 yd ³)	None
	Roof & Wall Sheathing	0.093 m ² (1 ft ²)	None
Remaining in BEES Online	Chairs	1 chair	None
	Fixed Casework	0.093 m ² (1 ft ²)	None
	Table Tops, Counter Tops, Shelving	0.093 m ² (1 ft ²)	None
	Pipes & Fittings	305 m (1000 ft)	None
	Adhesive or Mastic Remover	Removing 9.29 m ² (100 ft ²) of mastic/adhesive	None
	Transformer oil	Cooling for one 1000 kV·A transformer	None
	Fertilizer	0.40 ha (1 acre)	None
	Site Development (Fences & Gates)	0.3 m (1 ft)	None
	Site Development (Railings)	0.3 m (1 ft)	None
	Roadway Dust Control	92.9 m ² (1000 ft ²) of surface area	None
	Carpet Cleaners	Cleaning 92.9 m ² (1000 ft ²)	None
	Floor strippers	Remove 3 layers wax & 1 layer sealant from 9.29 m ² (100 ft ²)	None
	Bath and tile cleaner	3.8 l (1 gal) of cleaner	None
	Glass cleaners	3.785 m ³ (1,000 gal) of glass cleaner	None
	Grease and graffiti remover	3.8 l (1 gal) of grease and graffiti remover	None
	Plumbing Fixtures	1 toilet	None
	Lockers	0.093 m ² (1 ft ²)	None
	Fabricated Toilet Partitions	0.093 m ² (1 ft ²)	None
	Piping	305 m (1000 ft)	None
	Roof Coatings	0.093 m ² (1 ft ²)	None
Exterior Sealers & Coatings	Sealing/coating 9.29 m ² (100 ft ²)	None	
Framing	0.093 m ² (1 ft ²)	None	
Trim	1 linear foot	None	

This publication is available free of charge from: <https://doi.org/10.6028/NIST.TN.2032>

5 Floor Coverings Category

The floor coverings category covers both residential and commercial flooring products.

5.1 Floor Covering Types

There are a range of flooring types included in the floor coverings category as shown in Table 5-1.

Table 5-1 Floor Covering Types and Subtypes

Floor Covering	
Types	Subtypes
Carpet	Broadloom Tile
Resilient Flooring	Biobased tile (BBT) Cork Floating Floor Linoleum Sheet Linoleum Tile Vinyl Composition Tile Vinyl Sheet
Hardwood	Engineered Solid Strip
Hybrid Resilient Flooring	Sheet
Stone, Aggregate, or Composite	Ceramic Tile Composite Marble Tile Terrazzo

5.2 Floor Covering Characteristics and Certifications

BEES Online 2.0 has added a feature to filter/restrict products selected based on product characteristics, such as fraction recycled materials, and product certifications, such as U.S. Department of Agriculture (USDA) Certified Biobased. The current list of characteristics and certifications are listed in Table 5-2.

Table 5-2 Floor Covering Characteristics and Certifications

Characteristics and Certifications	
Federal Agency Certifications	USDA Certified Biobased EPA Comprehensive Procurement Guideline (CPG)
Standard Certification	NSF/ANSI 140 Certified NSF/ANSI 332 Certified
NGO Certification	UL 2818 GREENGUARD FloorScore Certified
Characteristics	25 % Recycled Content 35 % Recycled Content 50 % Recycled Content 75 % Recycled Content

5.3 Floor Covering Installation, Service Life, and Use Phase

To evaluate the life cycle impacts of floor coverings, it is necessary to include the installation and use phase impacts, both of which could vary depending on decisions outside the product manufacturer's control. Materials used in the installation phase may not be the manufacturer-recommended products. For example, adhesives are often required to install some flooring types, which may release different levels of VOCs. For this reason, a product that used adhesive in installation is offered with two installation options, a typical or manufacturer recommended VOC adhesive and a no-VOC adhesive (identified with a * at the end of the product name). Details on adhesive selection is defined for each BEES product in its associated documentation.

The service lives of floor products vary depending on the amount of floor traffic, type and frequency of maintenance, and flooring construction. The assumed service life is defined for each BEES product in its associated documentation.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing manufacturers' maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. Frequency of deep cleaning and refinishing or polishing, and types and quantities of these compounds will also depend on the maintenance programs developed by individual building owners. For BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published online; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dust mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. Inputs and outputs per cleaning event of regular maintenance are shown in Table 5-3.

Table 5-3 Inputs and Outputs per Regular Cleaning Event⁷

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Solid waste	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Solid waste	0.0077 kg	0.0016 lb

The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance, and this operation is a non-variable in BEES, although as acknowledged above, this may vary from building to building. Intermittent cleaning and maintenance schedules and resource requirements for the different floor products are defined for each BEES product in its associated documentation.

5.4 Armstrong Resilient Floor Coverings

The development of all Armstrong resilient floor coverings included in BEES Online 2.0 use the same underlying data and methodology as described in this section.

5.4.1 Product Description

Headquartered in Lancaster, PA, Armstrong Flooring Inc. has an extensive portfolio of resilient and wood flooring products. Armstrong’s mission is to “create innovative flooring solutions that inspire spaces where people live, work, learn, heal and play.”⁸ Armstrong Commercial Flooring submitted three floor covering products into BEES: Armstrong vinyl composition tile (VCT), Armstrong 2.5 mm linoleum sheet, and Armstrong BioBased Tile (BBT).

Armstrong VCT is a resilient floor covering comprised mostly of limestone in a vinyl binder matrix and is manufactured in Jackson, MS, Kankakee, IL, and South Gate, CA. Linoleum is a resilient floor covering made from natural raw materials including linseed oil, gum rosin from pine trees, recycled wood waste, jute fiber, and limestone. Armstrong linoleum is manufactured in Delmenhorst, Germany, and it is shipped worldwide, including to the U.S. Armstrong BBT is a non-polyvinyl chloride (PVC) tile with 85% limestone and BioStride, a biobased polyester binder. BBT is manufactured in Jackson, MS. The thickness and mass per area of the Armstrong products in BEES are provided in Table 5-4.

⁷ Energy input and solid waste quantity based on Tables 8 and 10 of Lu, Overcash, and Realff (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

⁸ Retrieved from <https://www.armstrongflooring.com/corporate/products.asp>.

Table 5-4 Armstrong Products Included in BEES

Products	Nominal Thickness mm (in)	Mass per Applied Area kg/m ² (lb/ft ²)
Armstrong VCT	3.175 (0.125)	6.84 (1.4)
Armstrong Linoleum Sheet	2.5 (0.098)	2.88 (0.59)
Armstrong BBT	3.175 (0.125)	7.03 (1.44)

The functional unit used for this BEES category is a flooring covering of 0.093 m² (1 ft²) used over the building’s operating lifetime of 60 years. Data for BEES is based on the EPDs published in 2014 on these products, with permission from Armstrong. While specific product detail in the EPDs is minimal, Armstrong provided Four Elements with the raw data files to comprehensively model the products for BEES. These products are applicable to the commercial market.

5.4.2 Flow Diagram

The flow diagrams in Figure 5-1, Figure 5-2, and Figure 5-3 show the major elements of the production of Armstrong products as they are modeled for BEES.

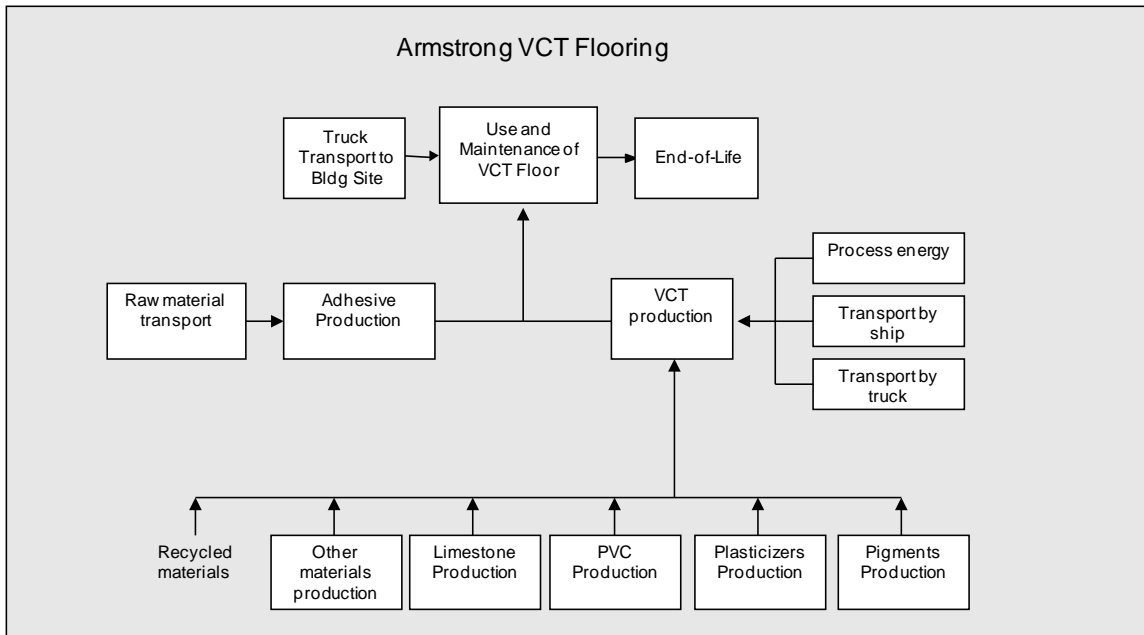


Figure 5-1 Armstrong VCT System Boundaries

This publication is available free of charge from: <https://doi.org/10.6028/NIST.TN.2032>

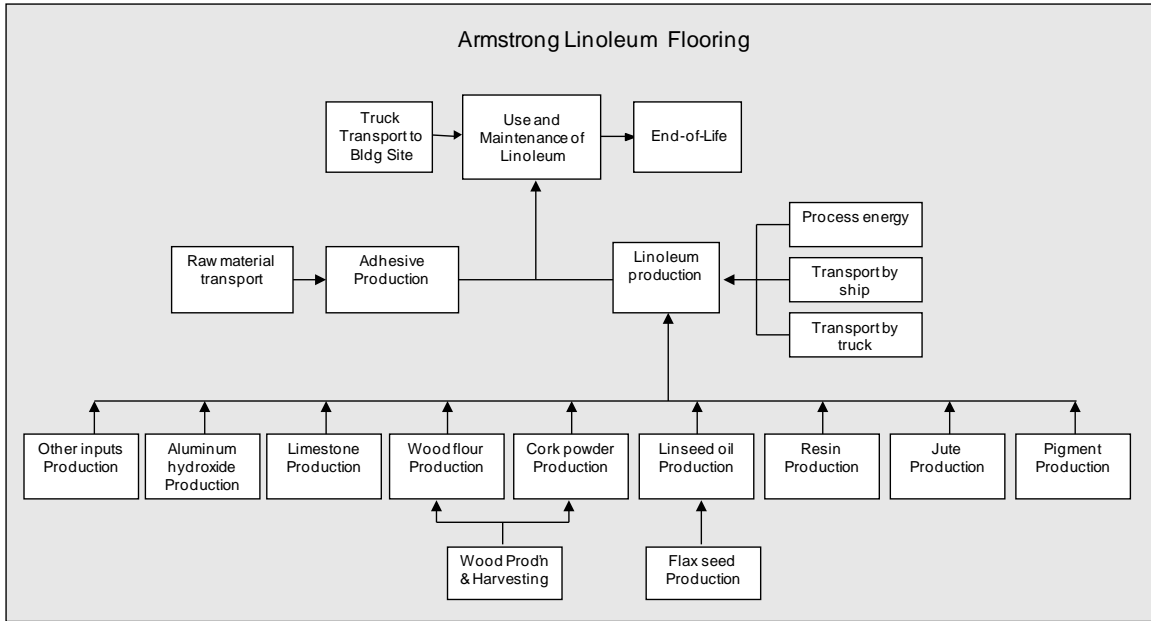


Figure 5-2 Armstrong Linoleum System Boundaries

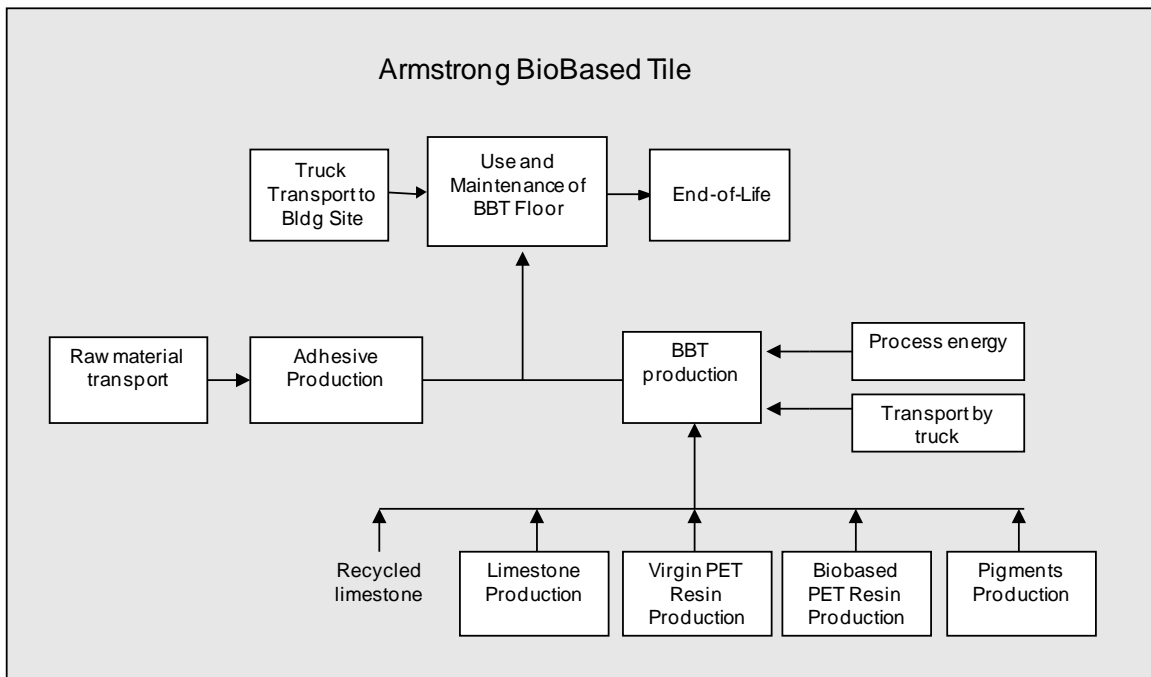


Figure 5-3 Armstrong BBT System Boundaries

5.4.3 Raw Materials

The material contents of the Armstrong floor products are provided in Table 5-5, Table 5-6, and Table 5-7.

Table 5-5 Armstrong VCT Composition⁹

Component	Material	% in VCT	Sourcing location
Filler	Limestone	84.0	USA/Canada/Europe
Binder	PVC	10.0	Indonesia/China
Plasticizers	Diocetyl Terephthalate (DOTP), blended dibenzoates, & dibutyl terephthalate	4.5	USA, Germany
Pigment	Titanium dioxide	0.5	Internal
	Colored mineral pigments	<0.1	Global
Stabilizer	Calcium zinc compound	<0.1	Global
Other	Recycled materials*	1.0	
Total		100%	

* According to the EPD, recycled materials may make up one or more of the materials in VCT.

Table 5-6 Armstrong Linoleum Composition¹⁰

Component	Material	% in Linoleum	Sourcing location
Filler	Limestone	15.0	Germany
	Wood / Cork powder	28.0	Germany
Backing	Jute	8.0	India
Binder	Linseed oil	31.0	Germany
	Tree resins	5.0	Indonesia
Fire retardant	Aluminum hydroxide	7.0	Hungary
Pigment	Titanium dioxide	5.0	Belgium
	Colored mineral pigments	0.5	Various
Stabilizer	Proprietary ingredient	0.5	Proprietary
Total		100%	

Table 5-7 Armstrong BBT Composition¹¹

Component	Material	% in BBT	Sourcing location
Filler	Limestone (10% recycled)	85 to 88	U.S.
Binder	Biobased polyester resin	11 to 14	U.S.
Pigment	Titanium dioxide	0.5	U.S.
	Colored mineral pigments	<0.1	U.S.
Total		100%	

The U.S. LCI database provided data for the vinyl as polyvinyl chloride resin, and wood powder, as sawdust. The limestone, titanium dioxide, jute, and aluminum hydroxide data were provided byecoinvent.

The Dioctyl Terephthalate (DOTP) data are a confidential data set based on one U.S. manufacturer’s late 2010’s primary data. It is considered representative technology. The other plasticizers are based on a dataset averaging three common phthalate esters

⁹ Table 4 of Armstrong (2014a)

¹⁰ Armstrong Linoleum EPD, Table 4 of Armstrong (2014b)

¹¹ Table 4 of Armstrong (2014c)

(DEHP/DINP/DIDP) (PricewaterhouseCoopers/Ecobilan, 2001). This data set was used as a proxy to represent common plasticizers but is not reflective of product content. The colored mineral pigments are assumed to be iron oxide based, and an internally-produced dataset on red iron oxide was used. No data were available for the calcium zinc compound.

Cork powder is a recycled material; while it has no upstream impacts, its transport to the flooring facility and processing is accounted for. The data for linseed oil, from flax seed, is based in internally-produced data sets. The tree resin, assumed to be pine rosin from tapped pine trees, is based on internally-produced data. The carbon in these biomass materials is modeled as sequestered except for the portion that is assumed to decompose in a landfill (see End of Life section).

The biobased polyester resin is a proprietary dataset that includes biobased polyethylene terephthalate (PET) resin and virgin PET. The virgin PET comes from the U.S. LCI database and the biobased PET is an internally-produced dataset with specific data provided by Armstrong.

The non-specified additives, proprietary ingredients, or other materials in Table 5-5, Table 5-6, and Table 5-7 are included in the inventory modeling but are not provided in this documentation, consistent with the level of detail released in the EPD. Production of this information is based mainly on the ecoinvent database and some U.S. LCI data.

Table 5-5, Table 5-6, and Table 5-7 provide the sourcing locations for materials used. Armstrong provided Four Elements with specific transportation distances and modes for each material to the Armstrong facilities. Transportation taking place outside North America was modeled using ecoinvent, while in the U.S., the U.S. LCI database was used.

Packaging materials and their transportation to Armstrong facilities have been included in the BEES model. Armstrong VCT and BBT are packaged in a recyclable corrugated box and Armstrong Linoleum is rolled and wrapped in Kraft paper. In all cases, wooden pallets are used to protect unit loads during shipping.

5.4.4 Manufacturing

Sec 5.2 of the VCT and BBT EPDs describe the manufacturing process as hot mixing of the raw materials milled and calendared into a hot sheet. Once cooled, the sheet is punched into floor tiles. VCT and BBT have a factory applied finish to protect the tile face during packaging and installation.

According to Fig. 2 of the Linoleum EPD, linoleum is made by first combining linseed oil and tree rosins to create linoleum cement. The cement is added to the fillers limestone and the wood/cork powder and pigments. The mixture is calendared and put onto a jute backing. The flooring is cured in an oven for 14 to 21 days, and then factory finishes are applied. The product is trimmed and packaged.

Detailed data on the energy requirements (including electricity and natural gas thermal energy), water use, air emissions, and waste from production of these products were provided to Four Elements, and these data were included in the models. These data are not provided in this documentation, consistent with the level of detail released in the EPD.

Data for electricity and natural gas come from the U.S. LCI database. Armstrong linoleum product-related waste is negligible, as rejected material and process trim scrap can be reused in the manufacturing process. Other manufacturing waste data for linoleum, plus waste for the other products, was provided to Four Elements and modeled as transported to and disposed of in a landfill or incinerated.

5.4.5 Transportation

Transportation of Armstrong VCT and BBT is done by heavy-duty truck to the building site, and 805 km (500 mi) was modeled. Linoleum is transported 5 800 km (3 605 mi) by ocean freighter and 805 km (500 mi) by heavy duty truck. Transportation models come from U.S. LCI database.

5.4.6 Installation

At installation, a layer of a water-based adhesive is applied to the products. Table 5-8 presents the adhesive products recommended by Armstrong, their quantity used, VOC contents, and recommended adhesive alternatives.

Table 5-8 Armstrong Adhesive Use

	Armstrong VCT	Armstrong Linoleum	Armstrong BBT
Adhesive Product (baseline)	Armstrong S-750 Premium Floor Tile Adhesive	Armstrong S-780 Synthetic Polymer Based Linoleum Adhesive	Armstrong S-525 BioBased Tile Adhesive
Quantity per kg/m² (lb/ft²)	0.130 (0.027)	0.435 (0.089)	0.139 (0.029)
VOC content g/l	5.9	5.1	16.2
VOC emission kg/m² (lb/ft²)	0.00068 (0.00014)	0.0015 (0.0003)	0.002 (0.0004)
Zero-VOC Adhesive Alternative	Armstrong S-515 Floor Tile Adhesive	--	Flip Spray Adhesive

BEES allows the user to choose between the VOC- and no-VOC adhesives, although it is acknowledged that the VOC levels in the baseline adhesives are far below the VOC emissions limits set out in Rule #1168 of California’s South Coast Air Quality Management District (SCAQMD), which is the VOC emissions limit standard used in BEES for the baseline adhesives in the floor covering category.¹² Installation is primarily

¹² For example, the limit for VCT adhesive is 50 g/l (0.4 lb/gal). For more information, see Table 1 of SCAQMD (2011)

a manual process, so no energy use is modeled for the installation phase. Ecoinvent datasets were used to build the adhesive.

Scrap generated during installation is modeled as 3% according to the Armstrong EPDs. Installation waste is modeled as transported 48 km (30 mi) by diesel truck and disposed of in a landfill. While some of the packaging waste at installation can be recycled, it is modeled as disposed of in a landfill.

5.4.7 Use and Maintenance

The service lives of floor products vary depending on the amount of floor traffic, type and frequency of maintenance, and flooring construction. The level of maintenance is also dependent on the actual use and desired appearance of the floor. For BEES, VCT has a lifetime of 25 years, consistent with the industry-average VCT EPD (RFCI, 2013a). BBT and linoleum are modeled as having lifetimes of 25 years and 30 years, respectively, consistent with Armstrong's EPDs. Replacement, including production of raw materials, manufacturing, transport to installation, etc., is included to account for the BEES flooring category's operating lifetime of 60 years.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing manufacturers' maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. Frequency of deep cleaning and refinishing or polishing, and types and quantities of these compounds will also depend on the maintenance programs developed by individual building owners. For BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published online; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dust mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. Inputs and outputs per cleaning event of regular maintenance are shown in Table 5-9.

Table 5-9 Inputs and Outputs per Regular Cleaning Event¹³

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Solid waste	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Solid waste	0.0077 kg	0.0016 lb

The solid waste is modeled as being transported by diesel truck and disposed of in a landfill.

The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance, and this is a non-variable in BEES, although as acknowledged above, this may vary from building to building. Table 5-10 through Table 5-13 present the intermittent cleaning and maintenance schedules and resource requirements for the different floor products.

Table 5-10 VCT and BBT Cleaning Processes and Frequency^{14,15}

<i>Cleaning Process</i>	<i>Frequency</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	Hot water, neutral detergent
Spray buff / finish restorer	1x per month	Floor finish, Electricity
Strip and 2 coats finish	1x per year	Finish remover, floor finish, Electricity

Table 5-11 VCT and BBT Intermittent Cleaning Inputs per Year¹⁶

<i>Cleaning Input</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	124	11.5
Electricity (kWh)	0.025	0.002
Finish (liter)	0.22	0.02
Finish remover (liter)	0.041	0.004
Water (liter)	6.2	0.58

Table 5-12 Linoleum Cleaning Processes and Frequency¹⁷

<i>Cleaning Process</i>	<i>Frequency</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	Hot water, neutral detergent
Deep cleaning (scrub)	1x per month	Electricity, neutral detergent, water
Polish	6x per year	Floor finish, electricity
Damp mop / neutral cleaner	1x per week	Hot water, neutral detergent

¹³ Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

¹⁴ According to the manufacturer, BBT has similar maintenance requirements as VCT.

¹⁵ Based on Table 1 in RFCI (2013a)

¹⁶ Table 2 in RFCI (2013a)

¹⁷ Based on Table 5 in Armstrong (2014b)

Table 5-13 Linoleum Intermittent Cleaning Inputs per Year¹⁸

<i>Cleaning Input</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	124	11.5
Electricity (kWh)	0.033	0.003
Polish/finish (liter)	0.10	0.009
Water (liter)	6.2	0.58

5.4.8 End of Life

All products are modeled as landfilled at end of life. End of life modeling includes transportation of the products and adhesive by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data. VCT and BBT are modeled in an inert material landfill; BBT’s biobased resin is assumed to not decompose as it is bound within the plastic resin. As such, its carbon content remains sequestered in the product.

Much of the linoleum product is sourced from biobased materials, so disposal includes data for both inert material in a landfill and disposal of biogenic material in a landfill. Mahalle (2011) and the EPA Waste Reduction Model (WARM) describe the impacts from biogenic material in a landfill as being made up of CH₄ from decomposition of biomass and CO₂ emissions associated with flaring these emissions where landfill gas is not recovered for energy; and CO₂ emissions avoided through landfill gas-to-energy projects. An assumed 23% of the wood decomposes, so storage of the remaining biogenic carbon is also accounted for (Section 5.1 in Mahalle (2011)). The data for net GHG emissions from landfill gas management practices comes from Table 31 in Mahalle (2011). For linoleum, these emissions are 0.379 kg CO₂ per kg linoleum and 0.017 kg methane per kg linoleum.

5.5 Forbo Products

The development of all Forbo flooring systems included in BEES Online 2.0 use the same underlying data and methodology as described in this section.

5.5.1 Product Description

Based in the Netherlands, the Flooring Systems division of Forbo is a global provider of commercial and residential floor coverings. Forbo Flooring Systems offers a range of linoleum, vinyl flooring, entrance flooring systems for cleaning and drying shoes, carpet tiles, needlefelt floor coverings and Flotex – the washable textile flooring – and building

¹⁸ No material or energy usage quantities were provided in the Armstrong EPD, so inputs were modeled using adjusted data from Table 2 in RFCI (2013a)

and construction adhesives. Forbo submitted three floor covering products into BEES: two thicknesses of Marmoleum tile (their linoleum brand) and one vinyl sheet floor covering. Marmoleum is a resilient floor covering made from natural raw materials including linseed oil, which comes from the flax plant seeds, gum rosin from pine trees, recycled wood waste of wood from controlled forests, and limestone. Marmoleum is manufactured in Kirkcaldy, United Kingdom. Eternal vinyl sheet floor covering is a resilient floor covering made up of PVC, plasticizer, mineral filler, stabilizers, and glass fiber. Eternal is manufactured in Coevorden, the Netherlands. The products are shipped worldwide, including to the U.S. Their thickness and mass per area are listed in Table 5-14.

Table 5-14 Forbo Products Included in BEES

Products	Nominal Thickness mm (in)	Mass per Applied Area kg/m² (lb/ft²)
Marmoleum 2.0 mm tile	2.0 (0.079)	2.3 (0.471)
Marmoleum 2.5 mm tile	2.5 (0.098)	3.0 (0.614)
Eternal Vinyl Sheet	2.0 (0.079)	2.8 (0.573)

The functional unit used for this BEES category is a flooring covering of 0.093 m² (1 ft²) used over the building’s operating lifetime of 60 years. Data for BEES comes from the EPDs published on these products, with permission from Forbo. The detailed LCA data used to build the models are published in the back of each EPD. These products are applicable to both the commercial and residential markets.

5.5.2 Flow Diagram

The flow diagrams in Figure 5-4 and Figure 5-5 show the major elements of the production of these products as they are modeled for BEES.

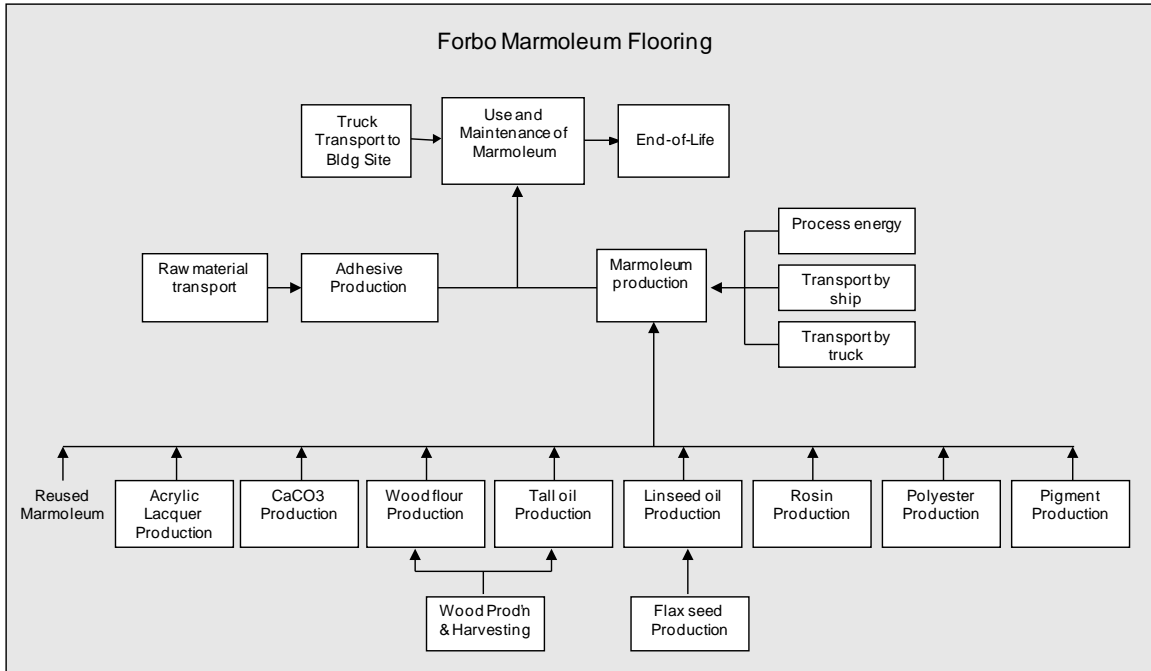


Figure 5-4 Marmoleum System Boundaries

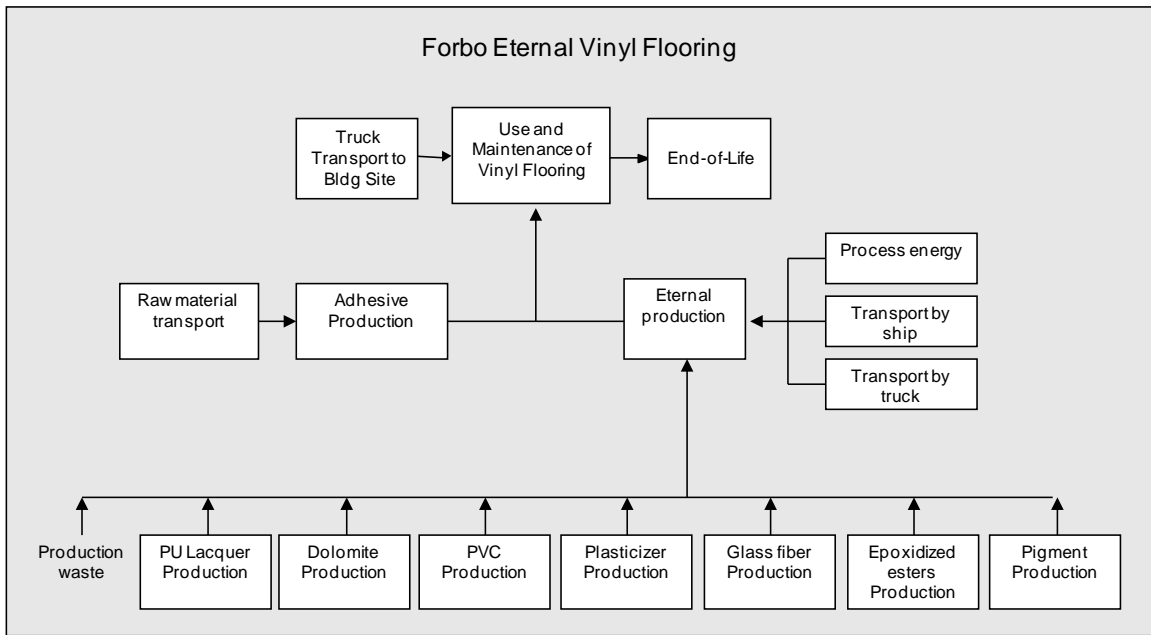


Figure 5-5 Eternal System Boundaries

5.5.3 Raw Materials

The compositions of the products are provided in Table 5-15 and Table 5-16.

Table 5-15 Marmoleum 2.0 and Marmoleum 2.5 Composition¹⁹

Component	Material	% in 2.0mm & 2.5mm	Sourcing location
Binder	Linseed oil	20.0	USA/Canada/Europe
	Gum rosin	2.0	Indonesia/China
	Tall oil	6.0	USA
Filler	Wood flour	31.0	Germany
	Calcium carbonate	8.0	Germany
	Reused Marmoleum	23.0	Internal
Pigment	Titanium dioxide	3.0	Global
Backing	Polyester	5.0	Europe
Finish	Lacquer	1.0	Netherlands
Total		100%	

* According to the EPD, recycled materials may make up one or more of the materials in VCT.

Table 5-16 Eternal Vinyl Sheet Composition²⁰

Component	Material	% in Linoleum	Sourcing location
Binder	PVC	39	Europe
	DINP & Dibenzoates	17	Europe
Filler	Dolomite	22	Europe
Stabilizers & additives	Epoxidized esters & proprietary mixtures & lubricants	4	Europe
Carrier	Glass fiber tissue	2	Netherlands/ Germany
Pigments	Titanium Dioxide (main pigment), plus others	0.5	Europe
Finish	polyurethane lacquer	<0.5	Europe
Recycle	Post production waste	15	Internal
Total		100%	

The U.S. LCI database provided data for the vinyl as polyvinyl chloride resin, polyester, as PET resin, and wood flour, as sawdust. The calcium carbonate, or limestone, titanium dioxide, lacquer finish, modeled as an acrylic binder in water, dolomite, glass fiber, and polyurethane lacquer data were provided by ecoinvent.

The DINP and dibenzoates plasticizers are based on a dataset averaging three common phthalate esters (DEHP/DINP/DIDP).²¹ This data set was used as a proxy to represent common plasticizers and may not be reflective of the current products used. The other pigments used are assumed to be mineral pigments. These pigments are modeled as a red iron oxide, which is an internally-produced dataset.

¹⁹ Table 2 in Forbo (2013a)

²⁰ Table 2 in Forbo (2013b)

²¹ PricewaterhouseCoopers/Ecobilan (2001)

Epoxidized ester is modeled as an epoxidized methyl soyate. For this analysis,ecoinvent data sets were used for soybean upstream data and internally-produced datasets for methyl ester and epoxidation were used. Tall oil rosin is a distillation product of crude tall oil; its production is based on an internally-produced data set. The data for linseed oil, from flax seed, is also based on internally-produced data sets, as is gum rosin, assumed to be pine rosin from tapped pine trees. The carbon in these biomass materials is modeled as sequestered except for the portion that is assumed to decompose in a landfill (see End of Life section).

Table 5-15 and Table 5-16 provide the sourcing locations for materials used. Table 10 and Table 5 of the Forbo LCA reports located at the end of the Marmoleum and Eternal EPDs, respectively, list the specific transport distances of each material to the Forbo facilities. Transportation taking place outside North America was modeled using ecoinvent transportation data, while in the U.S., the U.S. LCI database was used.

Packaging is included in BEES. Both Marmoleum products use corrugated board boxes (0.051 kg/m²), and polyethylene film (0.0004 kg/m²) (Table 9 in Forbo (2013a)). Eternal uses polyethylene film (0.002 kg/m²), corrugated board (0.055 kg/m²), and Kraftliner paper (0.011 kg/m²) (Table 4 of Forbo (2013b)). Ecoinvent provides the data for these products.

5.5.4 Manufacturing

Page 5 of Forbo (2013a) describes the production process as follows: “Marmoleum tile is produced in several stages starting with the oxidation of linseed oil mixed with tall oil and rosin. With the influence of oxygen from the atmosphere a tough sticky material is obtained called linoleum cement. The linoleum cement is stored in containers for a few days for further reaction and after this it is mixed with wood flour, calcium carbonate, reused waste (if applicable), titanium dioxide and pigments. This mixture is calendared on a polyester substrate and stored in drying rooms, to cure till the required hardness is reached. After approximately 14 days the material is taken out from the drying room to the trimming department where the factory finish is applied on the surface of the product and the end inspection is done. Finally, the edges are trimmed, and the sheet is cut to length into tiles of 333 mm x 333 mm (13.1 in x 13.1 in) or 500 mm x 500 mm (19.7 in x 19.7 in). The trimmings and the rejected product are reused.”

Table 5-17 provides the inputs and outputs for the Marmoleum products.

Table 5-17 Production Inputs and Outputs - Marmoleum²²

<i>Input</i>	<i>Quantity per m²</i>	<i>Quantity per ft²</i>
Electricity (MJ)	12.911	1.199
Natural gas (thermal) (MJ)	52.13	4.843
Output		
Waste (kg) – 2 mm	0.705	0.065
Waste (kg) – 2.5 mm	0.844	0.078

Data for natural gas comes from ecoinvent for EU production. Data for electricity is based on ecoinvent electricity grid data for the United Kingdom and the Netherlands. No product waste is generated, as trimmings and rejected product is recycled back into the calendared backing layer. Other production waste shown in Table 5-17 is incinerated.

Page 5 of Forbo (2013b) describes the production process as follows: PVC plastisols (mixture of PVC, plasticizer and additives) are prepared. Glass fleece is impregnated with a highly filled plastisol followed by the application of a thin white plastisol coating. Rotogravure printing, if required, is done to produce wood, stone or abstract designs. PVC plastisol topcoat and polyurethane lacquer are applied. After fusion at approximately 195 °C, the topcoat is mechanically embossed to enhance the decorative effect. A calendared back layer is then applied to the product. This layer contains a minimum of 45 % of process waste. The finished product is then trimmed, inspected and cut into saleable rolls (nominal length of 25 m (1640 ft)).

Table 5-18 provides the inputs and outputs for Eternal vinyl sheet flooring.

Table 5-18 Production Inputs and Outputs for Eternal²³

<i>Input</i>	<i>Quantity per m²</i>	<i>Quantity per ft²</i>
Electricity (MJ)	5.47	0.51
Natural gas (thermal) (MJ)	12.12	1.13
Water (kg)	1.45	0.13
Output		
Waste (kg)	0.416	0.039
Wastewater (kg)	0.64	0.059

Data for natural gas comes from ecoinvent for EU production. Data for electricity is based on ecoinvent electricity grid data for the Netherlands. No product waste is generated, as trimmings and rejected product is recycled back into the calendared backing layer. Other production waste shown in Table 5-18 is incinerated.

²² Table 8 in Forbo (2013a)

²³ Table 3 in Forbo (2013b)

5.5.5 Transportation

Transportation to the building site was modeled as based on transportation from the manufacturing plants to the U.S. The Marmoleum products are modeled as transported 5285 km (3285 mi) by ocean freighter from the Netherlands to a port in New York. Eternal is transported 6062 km (3768 mi) by ocean freighter from the Netherlands to New York. Once in the U.S., they are modeled as traveling an average distance of 2414 km (1500 mi). U.S. LCI database data were used for transportation.

5.5.6 Installation

At installation, a layer of a water-based adhesive is applied to both products. For Marmoleum, the amount of adhesive is 0.435 kg/m² (0.089 lb/ft²) and for Eternal, the amount is 0.3 kg/m² (0.06 lb/ft²).²⁴ Installation is primarily a manual process, so no energy use is modeled for the installation phase.ecoinvent datasets were used to build the adhesive. The adhesives recommended by Forbo are low (zero)-VOC; as such, this type is what is modeled in BEES. Forbo (2013a) specifies a “conservative” 0.435 kg/m² for Marmoleum products and Forbo (2013b) specifies 0.3 kg adhesive per m² for Eternal products.

The scrap generated during installation is modeled as 4.5 %.²⁵ The installation waste is modeled as transported 48 km (30 mi) by diesel truck and disposed of in a landfill. While some of the packaging waste at installation can be recycled, it is modeled as disposed of in a landfill.

5.5.7 Use and Maintenance

The service life of flooring products will vary depending on the amount of floor traffic and the type and frequency of maintenance. The level of maintenance is also dependent on the actual use and desired appearance of the floor. A lifetime of 30 years has been modeled for the Marmoleum and 35 years for Eternal. Replacement, including production of raw materials, manufacturing, transport to installation, etc., is included to account for the BEES flooring category’s operating lifetime of 60 years.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing manufacturers’ maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. Frequency of deep cleaning and refinishing or polishing, and types and quantities of these compounds will also depend on the maintenance programs developed by individual building owners. For BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry-

²⁴ Forbo (2013a)

²⁵ Both Forbo EPDs model a 6% installation scrap waste and this was reduced to 4.5% to be consistent with similar products in BEES.

or manufacturer-specific maintenance guides published on-line; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dust mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. For residential use the default is set to one time per week. Inputs and outputs per cleaning event of regular maintenance are shown in Table 5-19.

Table 5-19 Inputs and Outputs per Regular Cleaning Event²⁶

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Solid waste	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>		
	<i>Per m²</i>	<i>Per ft²</i>
Solid waste	0.0077 kg	0.0016 lb

The solid waste is modeled as being transported by diesel truck and disposed of in a landfill. The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance, and this operation is a non-variable in BEES, although as acknowledged above, it may vary from building to building. Table 5-20 through Table 5-23 present the intermittent cleaning and maintenance schedules for these flooring products.

Table 5-20 Linoleum Cleaning Processes and Frequency²⁷

<i>Cleaning Process</i>	<i>Frequency</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	Hot water, neutral detergent
Deep cleaning (scrub)	1x per month	Electricity, neutral detergent, water
Polish	6x per year	Floor finish, electricity

Table 5-21 Linoleum Intermittent Cleaning Inputs per Year²⁸

<i>Cleaning Input</i>	<i>Commercial</i>		<i>Residential</i>	
	<i>Per m²</i>	<i>Per ft²</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	124	11.5	62	5.76
Electricity (kWh)	0.033	0.003	0.013	0.001
Polish/finish (liter)	0.10	0.009	0.017	0.002
Water (liter)	6.2	0.58	3.1	0.29

²⁶ Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

²⁷ Based on Table 5 in Armstrong (2014b)

²⁸ No material or energy usage quantities were provided in the Armstrong EPD, so inputs were modeled using adjusted data from Table 2 in (RFCI, 2013a)

Table 5-22 Vinyl Floor Covering Cleaning Processes and Frequency²⁹

<i>Cleaning Process</i>	<i>Frequency</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	Hot water, neutral detergent
Deep cleaning (scrub)	1x per month	Electricity, neutral detergent, water
Polish	6x per year	Floor finish, electricity

Table 5-23 Vinyl Intermittent Cleaning Inputs per Year³⁰

<i>Cleaning Input</i>	<i>Commercial</i>		<i>Residential</i>	
	<i>Per m²</i>	<i>Per ft²</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	119	11.1	59.5	5.5
Electricity (kWh)	0.022	0.002	0.002	0.0002
Polish/finish (liter)	0.12	0.011	0.010	0.001
Water (liter)	5.8	0.54	2.9	0.270

5.5.8 End of Life

End of life modeling of the floor products and adhesive includes transportation of these materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data. Eternal is considered inert and is modeled as inert material in a landfill.

Much of the linoleum product is sourced from biobased materials, so disposal includes data for both inert material in a landfill and disposal of biogenic material in a landfill. Mahalle (2011) and the EPA WARM describe the impacts from biogenic material in a landfill as being made up of CH₄ from decomposition of biomass and CO₂ emissions associated with flaring these emissions where landfill gas is not recovered for energy; and CO₂ emissions avoided through landfill gas-to-energy projects. An assumed 23% of the wood decomposes, so storage of the remaining biogenic carbon is also accounted for (Section 5.1 in Mahalle (2011)). The data for net GHG emissions from landfill gas management practices comes from Table 31 in Mahalle (2011). For linoleum, this amounts to 0.379 kg CO₂ per kg linoleum and 0.017 kg methane per kg linoleum.

5.6 Tandus Centiva Commercial Carpet

The development of all Tandus Centiva commercial carpet included in BEES Online 2.0 use the same underlying data and methodology as described in this section.

²⁹ Based on Table 5 in Armstrong (2014b)

³⁰ No material or energy usage quantities were provided in the Armstrong EPD, so inputs were modeled using adjusted data from Table 2 in (RFCI, 2013a)

5.6.1 Product Description

Based in Dalton, Georgia, Tandus Centiva, a Tarkett company, offers a unique line of Powerbond, Modular, Broadloom, Woven, and Luxury Vinyl Tile flooring products with a true fit-for-purpose approach to enhance spaces for learning, working, healing, and living. The six Tandus Centiva products listed in Table 5-24 are included in BEES.

Table 5-24 Tandus Centiva Products Included in BEES

Products	Mass per Applied Area <i>kg/m² (lb/ft²)</i>	Density in <i>kg/m³ (lb/ft³)</i>
ER3 Modular	4.4 (0.91)	567.0 (35.0)
ethos Modular	3.3 (0.68)	550.8 (34.0)
Powerbond ethos Cushion	3.1 (0.63)	396.9 (24.5)
Powerbond Cushion	2.7 (0.56)	220.3 (13.6)
Flex-Aire Cushion Modular	4.0 (0.83)	322.4 (19.9)
Powerbond Medfloor	2.8 (0.58)	223.6 (13.8)

Tandus Centiva products in BEES are modeled using an average of 0.68 kg/m² (20 oz/yd²) yarn which represents Tandus Centiva’s annual nylon 6 and nylon 6,6 (solution and yarn dyed) usage. Powerbond and the modular products are made available by Tandus Centiva as “carbon-free” or “climate neutral”; for an additional cost per square unit to the customer, the GHGs emitted over the carpets’ life cycles can be optionally offset or balanced.³¹

5.6.2 Flow Diagram

The flow diagrams in Figure 5-6, Figure 5-7, and Figure 5-8 show the major elements of the production of these products as they are modeled for BEES.

³¹ This is done through the Carbonfund.org.

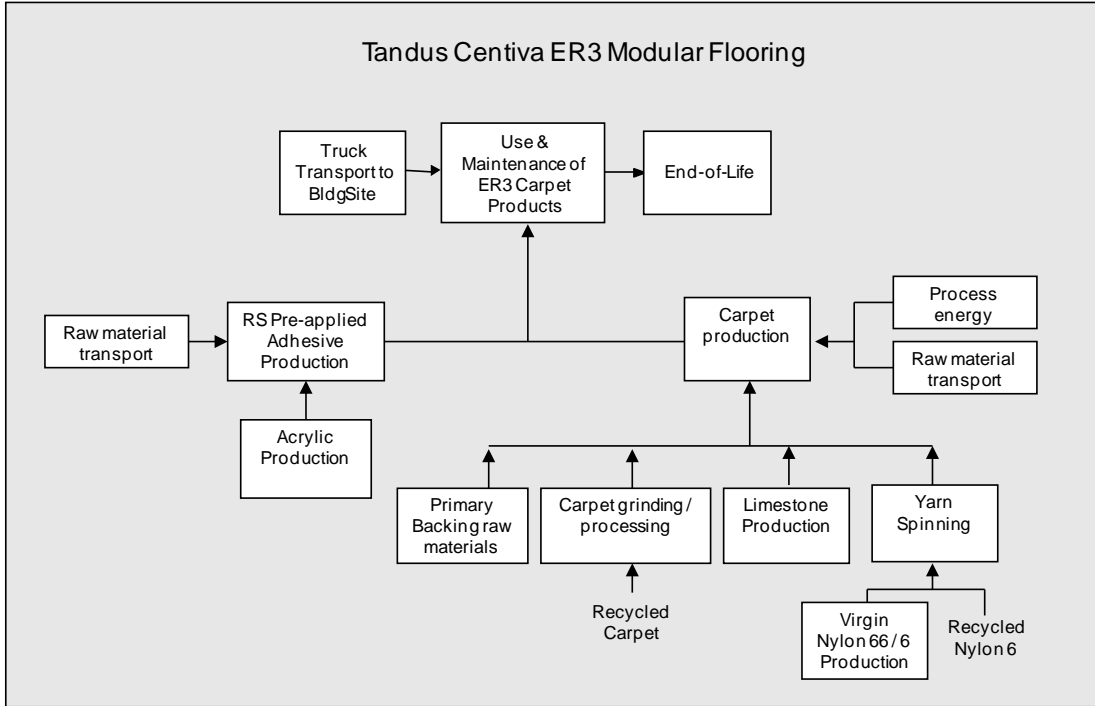


Figure 5-6 Tandus Centiva ER3 Modular RS Flooring System Boundaries

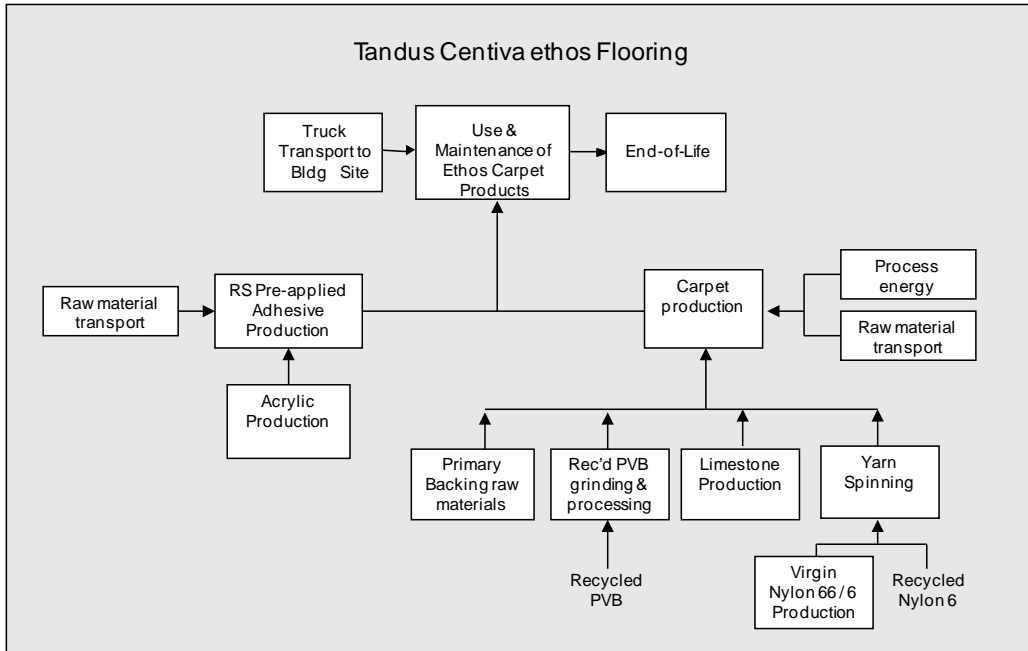


Figure 5-7 Tandus Centiva ethos Flooring System Boundaries

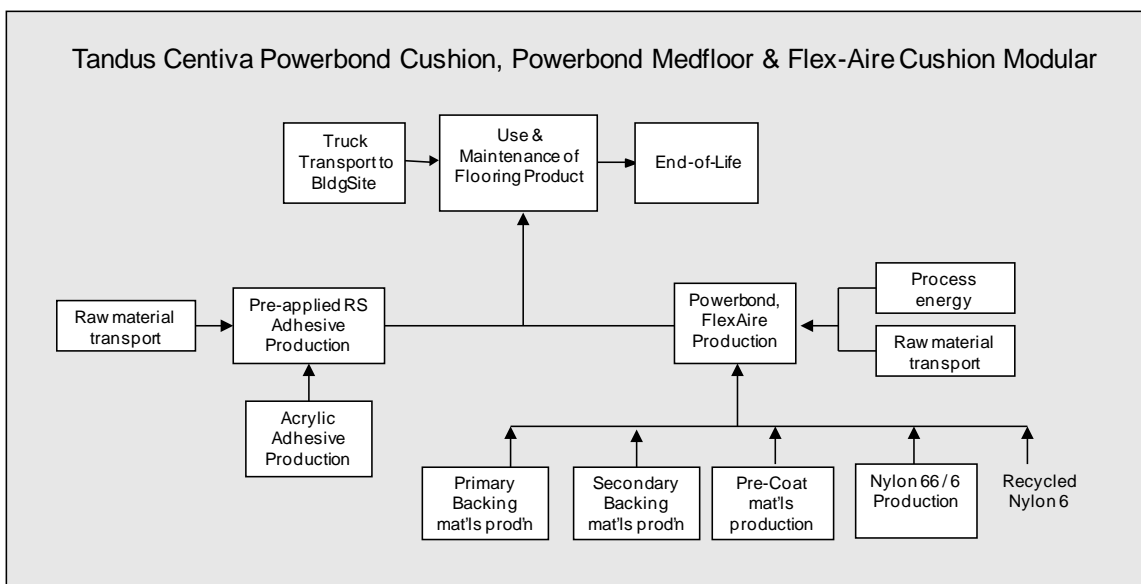


Figure 5-8 Tandus Centiva Powerbond Cushion RS, Powerbond Medfloor RS and Flex-Aire Cushion Modular RS System Boundaries

5.6.3 Raw Materials

Table 5-25 and Table 5-26 present the constituents by mass percentage of the Tandus Centiva products.

Table 5-25 Tandus Centiva Flooring Compositions

<i>Constituent</i>	<i>Mass Fraction</i>		
	<i>ER3 Modular RS</i>	<i>Ethos Modular</i>	<i>Powerbond ethos Cushion RS</i>
Nylon 6,6 Yarn	8.1 %	10.9 %	10.6 %
Nylon 6 Yarn	6.3 %	8.5 %	9.9 %
Pre-consumer nylon 6	0.7 %	1.0 %	1.0 %
Primary backing	2.5 %	3.3 %	3.6 %
Recycled carpet, vinyl, and limestone (filler)	63.6 %		
Recycled polyvinyl butyral (PVB)/Limestone (filler)		51.4 %	46.1 %
Other Additives (precoat, RS adhesive, stabilization fabrics, etc.)	18.8 %	24.9 %	28.8 %
Total:	100 %	100 %	100 %

Tandus Centiva products were modeled based on an average product style representative of the product line. Yarn for Tandus Centiva’s products was modeled based on the company’s annual usage of nylon 6 and nylon 6,6. The nylon 6 has an average of 10 % pre-consumer content.

The primary backing used is a polyester nonwoven material typical of that utilized in commercial floor coverings. Data for polyester is a U.S. LCI Database data set for PET resin. The secondary backing for ER3 products is made from recycled pre- and post-

consumer (PC) vinyl backed carpet. No production data are included for recycled vinyl backed carpet, except for data for the materials’ transportation to the site and processing into backing. The secondary backing for ethos products is made from postconsumer polyvinyl butyral (PVB) film recovered from windshield and safety glass recycling facilities. The transportation and processing of the PVB are accounted for in the model. Data for the limestone and other additives come fromecoinvent.

Table 5-26 Tandus Centiva Powerbond Cushion RS, Flex-Aire Cushion Modular RS, and Powerbond Medfloor RS Composition

<i>Constituent</i>	<i>Mass Fraction</i>		
	<i>Powerbond Cushion RS</i>	<i>Flex-Aire Cushion Modular RS</i>	<i>Powerbond Medfloor RS</i>
Nylon 6,6 Yarn	12.8 %	8.9 %	12.8 %
Nylon 6 Yarn	10.0 %	6.9 %	10.0 %
Pre-consumer nylon 6	1.1 %	0.7 %	1.1 %
Primary backing	4.0 %	2.7 %	3.9 %
Secondary backing	43.8 %	60.8 %	44.6 %
Other Additives (precoat, RS adhesive, stabiliz. fabrics, etc.)	28.3 %	20.0 %	27.6 %
Total:	100 %	100 %	100%

Powerbond Cushion and Powerbond Medfloor are flooring products with a heterogeneous construction of nylon and closed cell cushion. The cushion and nylon are fused together with heat and pressure in the Powerbond process creating a floor covering that is integral and inseparable. Flex-Aire Cushion Modular is produced in the same manner except that an intermediate vinyl coating layer along with a nonwoven fiberglass sheet is applied between the precoat and secondary backing. Data for nylon 6,6 and nylon 6 are described above and the primary backing is a polyester nonwoven material. The data sources for these and other materials are described above. The secondary backing is a moisture-impermeable, closed cell vinyl cushion that enhances acoustical and thermal insulation properties as well as ergonomics. Data for vinyl is a polyvinyl chloride resin that comes from the U.S. LCI Database.

Transportation distances for shipment of the raw materials from the suppliers to the manufacturing plant are provided by Tandus Centiva. Most of the materials are transported exclusively by diesel truck, while some are transported by diesel truck and ocean freighter or rail and ocean freighter. All forms of transportation are included in the model, and all data are based on the U.S. LCI Database.

The modeled packaging components, as well as transportation distance and mode to Tandus Centiva’s facility have been included in the BEES model. Modular flooring products are packaged in recycled content cardboard boxes, stacked on wooden pallets, and secured with stretch wrap. The roll products are placed on a recycled content cardboard core and secured in plastic. Tandus Centiva encourages installers to recycle packaging materials in local recycling programs.

5.6.4 Manufacturing

The manufacturing process for Tandus Centiva's products consists of tufting the nylon yarn, applying the precoat compound, adhering the secondary backing, and applying Revolutionary System (RS) adhesive. The BEES products have been modeled using an overall facility average of electricity, natural gas used in ovens, and water usage (which includes water for yarn dyeing). These amounts are 9.7 MJ/m² (2.25 kWh/yd²) of electricity, 16.22 MJ/m² (0.129 therm/yd²) of natural gas, and 13.6 L/m² (3.0 gal/yd²) of water. Although some carbon offsets and Renewable Energy Credits (RECs) are purchased annually, these flows were not considered in the model. The data for the production and use of energy comes from the U.S. LCI Database.

Waste to landfill accounts for 0.020 kg/m² (0.036 lb/yd²). Product-specific waste generated during manufacturing is recycled back into new carpet products as part of Tandus Centiva's in-house third party certified recycling process. Transportation to the landfill by diesel truck is accounted for.

5.6.5 Transportation

The distance for transport by diesel truck from the Tandus Centiva manufacturing plant in Dalton, Georgia to installation is modeled based on the weighted average transportation distance for Tandus Centiva's North American customers: 1966 km (1222 mi). Transportation emissions allocated to each product depend on the overall mass, as given in Table 5-25 and Table 5-26.

5.6.6 Installation

Most Tandus Centiva products are produced with RS pre-applied adhesive, which provides a "peel and stick" installation system. It eliminates the need for wet adhesive, simplifies installation, and reduces VOC emissions and odors. According to Tandus Centiva, 2 % waste is generated during installation of modular and Powerbond products. This waste percentage was incorporated into the production and manufacturing aspects of the model. Scraps are typically kept at the building site for future repairs. While much of the packaging waste at installation can be recycled, it is modeled as transported 48 km (30 mi) by diesel truck and disposed of in a landfill.

5.6.7 Use and Maintenance

Tandus Centiva's Powerbond products are assumed to be replaced after 25 years, and modular products at 15-year intervals. Replacement, including producing raw materials, manufacturing, transport to installation, installation, etc., is included to account for the BEES flooring category's operating lifetime of 60 years.

BEES includes cleaning and maintenance of the floor covering products during their useful lifetime. Because of maintenance programs developed by individual building owners and different manufacturers' maintenance recommendations, there is no single maintenance regimen that is always followed. For example, frequency of deep cleaning

and types and quantities of cleaning solutions will depend on the maintenance programs at the buildings. For BEES, cleaning and maintenance is modeled of the floor products based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published on-line; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular vacuuming of dirt and dust is a variable in BEES. The BEES user chooses the vacuuming frequency per week. The second part of cleaning is characterized as intermittent deeper cleaning – for carpets, this activity is extraction cleaning. Deep-cleaning is a non-variable in BEES, although as acknowledged above, frequency may vary from building to building.

The carpet cleaning data are based on recommendations in the Carpet and Rug Institute (CRI) Carpet Maintenance Guidelines for Commercial Applications for regular vacuuming and intermittent extraction cleaning (CRI, 2014). For BEES, the number of vacuum cleaning events per week is chosen by the user; the default number for commercial carpets is four times per week, averaging out the vacuuming needs of different traffic volumes. (CRI (2014), p.18/30) Commercial carpet is modeled as deep cleaned two times per year. Specific input and output data for vacuuming and deep cleaning come from a carpet cleaning and maintenance report prepared by the Consortium on Competitiveness for the Apparel, Carpet, and Textile Industries (CCACTI) through the Carpet and Rug Institute, Academic Institutions and funded by the State of Georgia (Lu et al., 2008).

Table 5-27 through Table 5-29 provide the energy and other inputs and outputs used for carpet care.

Table 5-27 Energy per Cleaning Event³²

<i>Electrical energy</i>	<i>MJ per yd²</i>	<i>kWh per ft²</i>
Vacuum	0.012	3.70E-04
Agitator (deep clean)	0.009	2.78E-04
Heat for 120F hot water (deep clean)	0.144	4.44E-03
Extractor (deep clean)	0.023	7.10E-04
Fan drying (deep clean)	0.087	2.69E-03

Table 5-28 Inputs per Cleaning Event³³

<i>Input</i>	<i>kg per yd²</i>	<i>lb per ft²</i>
Water	0.034	8.33E-03
Detergent	0.0012	2.94E-04
Hot water	1.44	0.353

³² Based on Table 8 in Lu et al. (2008).

³³ Based on Table 6 in Lu et al. (2008)

Table 5-29 Outputs per Cleaning Event³⁴

<i>Output</i>	<i>kg per yd²</i>	<i>lb per ft²</i>
Solid waste from the vacuum	0.0064	1.57E-03
Water output after extraction	1.44	0.353
Detergent effluents	0.00085	2.08E-04
Solid waste from extraction	0.012	2.94E-03

5.6.8 End of Life

Tandus Centiva products are 100 % recyclable in Tandus Centiva’s in-house closed-loop recycling process. Tandus Centiva annually recycles over 10 million pounds of postconsumer carpet, a rate of 12.8 %. Carpet that is not recycled is modeled as disposed of in a landfill. A diesel-powered truck is modeled as transporting the product 48 km (30 mi) to its destination. The recycled percentage of Tandus Centiva products are accounted for as being diverted from the landfill, but no other credits in the BEES system boundaries are given to the recycled products.

5.7 Average Ceramic Tile

The development of the industry average ceramic tile included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.7.1 Product Description

Ceramic tile produced in North America is described in a 2014 industry-average EPD as a mixture of multiple mineral-based natural materials including clay, sand, feldspar, talc, nepheline, and shale. The tiles are either pressed or extruded into the desired shape and fired in kilns at high temperatures. Ceramic tile is fire resistant, non-combustible, durable, and easy to maintain.

The ceramic tile covered in the 2014 EPD comprises tile sizes between 12.7 mm x 12.7 mm (0.5 in x 0.5 in) and 609.6 mm x 609.6 mm (24 in x 24 in), and thicknesses between 7.3 mm (0.29 in) and 11 mm (0.43 in). Tile weight ranges from 17.0 kg/m² (3.48 lb/ft²) to 34.2 kg/m² (7.0 lb/ft²); the industry average weight used in the EPD – and thus for BEES - is 18.1 kg/m² (3.7 lb/ft²). The functional unit used for BEES is a flooring covering of 0.093 m² (1 ft²) used over the building’s operating lifetime of 60 years. Data for BEES were furnished by the Tile Council of North America, Inc. (TCNA) and are based on the LCA performed by TCNA and its member companies, whose results were used in the ceramic tile EPD. Ceramic tile for BEES is applicable to the commercial and residential markets.

³⁴ Based on Table 10 in Lu et al. (2008)

5.7.2 Flow Diagram

The flow diagram in Figure 5-9 shows the major elements of the production of this product, as it is currently modeled for BEES.

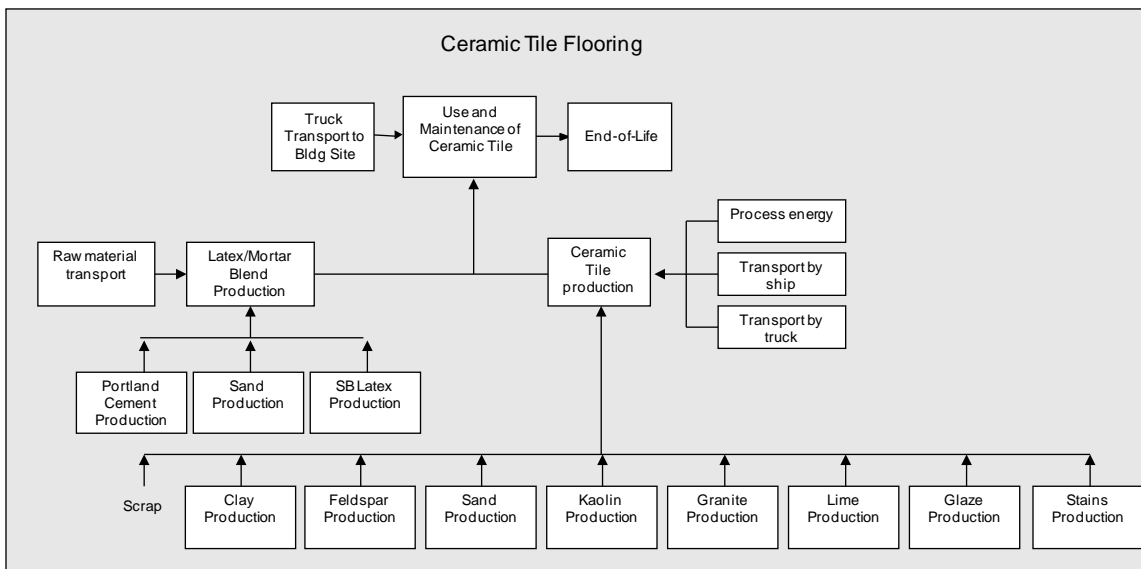


Figure 5-9 Ceramic Tile System Boundaries

5.7.3 Raw Materials

The material content of the ceramic tile floor is provided in Table 5-30.

Table 5-30 Ceramic Tile Composition³⁵

<i>Constituent</i>	<i>Mass Fraction (%)</i>	<i>Mass (kg/m²)</i>	<i>Mass (lb/ft²)</i>
Body:			
Clay	70.3	12.72	2.61
Feldspar	5.3	0.96	0.20
Sand	4.8	0.87	0.18
Scrap (pre, post-consumer)	4.2	0.76	0.16
Kaolin	3.2	0.58	0.12
Granite	1.3	0.24	0.05
Lime	1.1	0.20	0.04
Other additives	4.0	0.72	0.15
Surface:			
Glaze & stain (mineral-based)	5.4	0.98	0.20
Total	100	18.1	3.7

The origin of the materials is designated as coming from the U.S., Mexico, and/or Europe. The ecoinvent database provided data for the specified materials in Table 5-30, except the scrap. For granite, ecoinvent's basalt quarrying was used as a proxy. The PC

³⁵ Table 2 in TCNA (2014)

scrap does not have upstream inputs except the transportation of material to manufacturing; it is assumed that processing of the scrap is included in the manufacturing energy.

It should be noted that the non-specified additives and glazes and stains in Table 5-30 were included in the inventory modeling but are not provided in this documentation, consistent with the level of detail released in the EPD. Production of these inventories comes mainly fromecoinvent and U.S. LCI databases.

Ceramic tile manufacturers are located throughout North America. Much of the product weight is made up of materials typically located near manufacturing sites. Except for some of the European-sourced inputs which are shipped by ocean freighter, the raw materials used in the manufacture of the tile are assumed to be transported to the production facility via diesel truck within 805 km (500 mi). Transportation of the installation materials to the end user is assumed to be 241 km (150 mi) via diesel truck.

Ceramic tile flooring is packaged primarily in cardboard boxes, placed on pallets, and wrapped in plastic film. Packaging materials and their transportation to ceramic tile facilities have been included in the BEES model.

5.7.4 Manufacturing

Page 10 of the ceramic tile EPD (2014) describes manufacturing as follows: “Tile body ingredients are combined with water, mixed, and milled into the desired consistency. The resulting slurry is then spray dried to achieve the optimal moisture content. The milled and dried ingredient, called ‘body material’ or ‘prill’, is then pressed to the desired shape. Glaze is applied, as well as decorative treatment, and fired in a high temperature kiln.”

Detailed data on the energy requirements (including electricity, natural gas, diesel fuel, and propane); water use; air emissions; wastewater; and waste generated during production of ceramic tiles were provided to Four Elements, and these data were included in the model. These data are not provided in this documentation, consistent with the level of detail released in the 2014 EPD. Data for the energy sources come from the U.S. LCI database.

Most manufacturers’ products’ scrap and waste are reincorporated into tile manufacturing; this waste reclamation minimizes waste and maximizes resources. For the EPD and BEES, between 0 kg/m² (0 lb/ft²) and 1 kg/m² (0.2 lb/ft²) of waste per of tile is generated as waste during production. This waste is modeled as transported and disposed of as inert waste in a landfill.

5.7.5 Transportation

Transportation of ceramic tile by heavy-duty truck to the building site is modeled as 805 km (500 mi).

5.7.6 Installation

Mortar in the amount of 4.1 kg/m² (0.833 lb/ft²) and sanded grout in the amount of 0.21 kg/m² (0.043 lb/ft²) are needed to install ceramic tile.³⁶ The mortar is modeled as a latex/mortar blend; its constituents are provided in Table 5-31.

Table 5-31 Latex/Mortar Blend Composition

<i>Constituent</i>	<i>Mass Fraction</i>
Mortar	70 %
Portland Cement	17 %
Sand	83 %
Styrene-Butadiene Latex	30 %

The sanded grout is modeled as a mixture of Portland cement and sand with smaller amounts of titanium dioxide as pigment and other additives. The installation materials were modeled using ecoinvent and U.S. LCI database data. Installation of tile and mortar is assumed to be a manual process, so there are no emissions or energy inputs.

The scrap generated during installation is estimated to be 4.5 % of the total flooring material. While the ceramic material could be recycled, it is modeled as transported 48 km (30 mi) by diesel truck and disposed of in a landfill. Packaging waste is also modeled as disposed of in a landfill, although it is acknowledged that it could be recycled.

5.7.7 Use and Maintenance

A 60-year service life is given to the ceramic tile flooring as it is expected to last at least as long as the building itself.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing building maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. For all flooring products in BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published on-line; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dust mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. For residential use, the default is set to one time per week. The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance where

³⁶ Ceramic Tile EPD.

applicable, and this cleaning regimen is a non-variable in BEES, although as acknowledged above, it may vary from building to building. For commercial applications, a damp mop is used to clean the floor one time per week, and this amounts to 1.13 L/m² (0.03 gal/ft²) per year. For residential applications, a damp mop is used to clean the floor one time every two weeks, amounting to 0.57 liters/m² (0.014 gal/ft²) per year.³⁷

5.7.8 End of Life

Ceramic tile is modeled as landfilled at end of life. End of life modeling includes transportation of the ceramic tile flooring and the installation material by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based on ecoinvent end of life waste management process data.

5.8 Average Vinyl Composition Tile (VCT)

The development of the industry average vinyl composition tile included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.8.1 Product Description

VCT is a resilient floor covering made primarily from calcium carbonate (limestone) with smaller amounts of polyvinyl chloride, plasticizers, and additives (i.e., pigments and stabilizers). VCT is one of the most widely used resilient flooring materials in commercial interiors with a smaller amount being used residentially. Because of its low cost and wide variety of visuals available, VCT is recognized for its cost-effective performance, durability, and quality. Data for BEES were furnished by the Resilient Floor Covering Institute (RFCI) and are based on the LCA performed by RFCI and its member companies, whose results were used in the North American industry-average VCT EPD (RFCI, 2013a). Industry-average tile thickness ranged from 2.4 mm to 3.2 mm (0.094 in to 0.126 in). The industry-average product weight, 6.79 kg/m² (1.39 lb/ft²), that corresponds with the weighted average thickness is used for BEES (RFCI, 2013a). The functional unit used in BEES for VCT of 0.093 m² (1 ft²) used over the building's operating lifetime of 60 years. This product in the BEES model is applicable to the commercial market.

5.8.2 Flow Diagram

The flow diagram in Figure 5-10 shows the major elements of the production of this product, as it is currently modeled for BEES.

³⁷ Based partially on information from Table 3 in TCNA (2014) of the Ceramic Tile EPD

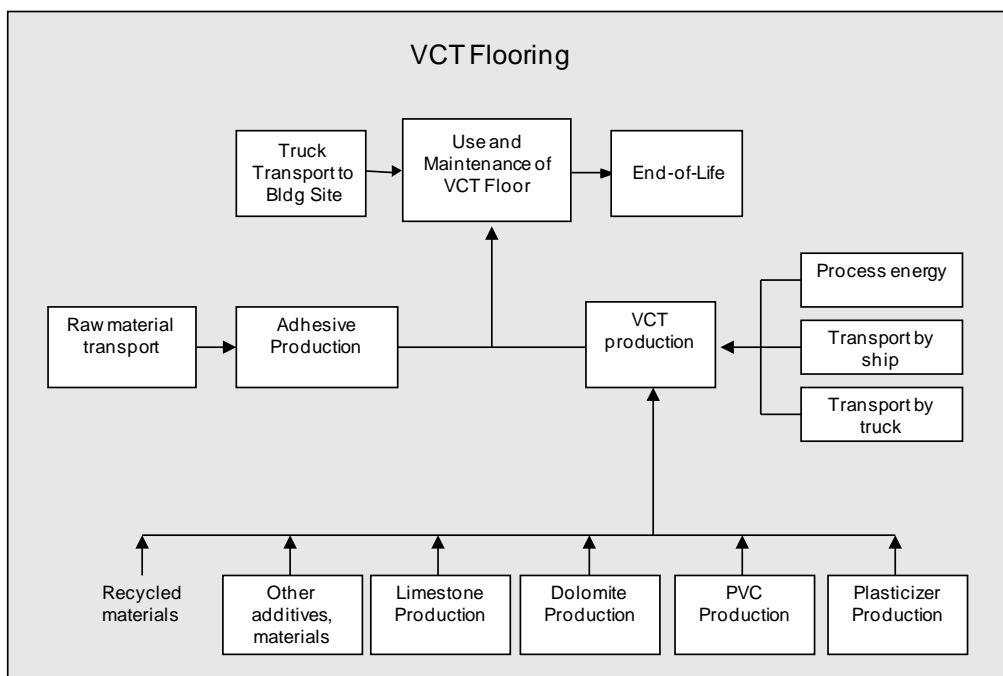


Figure 5-10 Vinyl Composition Tile System Boundaries

5.8.3 Raw Materials

The material content of the VCT floor is provided in Table 5-32 (Page 4 in RFCI (2013a)).

Table 5-32 Vinyl Composition Tile Composition³⁸

<i>Constituent</i>	<i>Mass Fraction (%)</i>	<i>Mass (kg/m²)</i>	<i>Mass (lb/ft²)</i>
Fillers: limestone & dolomite (fillers)	84.1	5.71	1.17
Resin: polyvinyl chloride	11.3	0.77	0.16
Plasticizer: DOTP	3.5	0.24	0.05
Additives: various	0.8	0.05	0.01
Other components: various	0.3	0.02	0.00
Total	100	6.79	1.39

The U.S. LCI database provided data for the polyvinyl chloride resin. The limestone and dolomite data were provided by ecoinvent. The DOTP data are a confidential data set based on one U.S. manufacturer’s late 2010’s primary data. It is representative technology. Additives include pigments and stabilizers. Other components include the finish coat applied to the tile at manufacture. Internal recycling is quite common; most scrap and rejected materials are reused in the manufacturing process for VCT and ends up in the finished product. The EPD reports that on average, recycled materials make up 6.9 % of this product and are a combination of one or more ingredients including binder,

³⁸ Table 2 in TCNA (2014)

fillers, plasticizer, and additives. It should be noted that the non-specified additives and other materials in Table 5-32, as well as recycled materials, were included in the inventory modeling but are not provided in this documentation, consistent with the level of detail released in the EPD. Production of these inventories is based mainly on the ecoinvent database and some U.S. LCI data.

VCT producers are located throughout the country. The bulk of the product weight is limestone, a readily-available and plentiful filler typically located near manufacturing sites. The raw materials used in the manufacture of the tile are all assumed to be transported to the production facility via diesel truck within 805 km (500 mi). Transportation distance of adhesive to the end user is assumed to be 241 km (150 mi) via diesel truck.

Packaging materials and their transportation to VCT manufacturing facilities have been included in the BEES model. VCT flooring is packaged in cardboard boxes, stacked on wooden pallets, and secured with stretch wrap.

5.8.4 Manufacturing

VCT is produced in several stages beginning with the mixing of the raw materials including limestone, polyvinyl chloride, plasticizer, stabilizers, and pigments. Once thoroughly mixed, the material is fed into a mill and formed into a sheet. The sheet is then punched into tiles, cooled, and finally packaged in cartons. Detailed data on the energy requirements (electricity and natural gas), water use, air emissions, and waste generated during production of VCT were provided to Four Elements, and these data were included in the model. These data are not provided in this documentation, consistent with the level of detail released in the EPD. Data for electricity and natural gas come from the U.S. LCI database.

1.5 % by weight of the VCT materials is generated as waste during production. This waste is usually comprised of granulated VCT and VCT dust, and modeling for this waste includes transportation to and disposal in a landfill.

5.8.5 Transportation

Transportation distance of VCT by heavy-duty truck to the building site is modeled as 805 km (500 mi).

5.8.6 Installation

At installation, a layer of a water-based styrene-butadiene adhesive is applied in the amount of 0.3 kg/m² (0.06 lb/ft²) (RFCI, 2013a). Installation is primarily a manual process, so no energy use is modeled for the installation phase. Ecoinvent datasets were used to build the adhesive.

Water-based adhesive formulations today are used far more often than conventional solvent-based adhesives which are known to emit higher levels of VOCs. Because of the

broad selection of adhesives on the market and, thus, varying levels of VOCs that could be emitted after installation, the VOC emissions limits for sealants and adhesives, set out in Table 1 in SCAQMD (2011), have been used for the baseline tile adhesive used in BEES, or 50 g/l (0.4 lb/gal). A “low-VOC” alternative is also offered for the BEES user; here, the adhesive is modeled as having a negligible VOC content. The adhesive off-gassing is included for each installation.

Installation scrap varies depending on the job size. It is estimated that, on average, the scrap generated during installation is 4.5 % of installed product (RFCI, 2013a).

Installation waste is modeled as being transported 48 km (30 mi) by diesel truck and disposed of in a landfill. While some of the packaging waste at installation can be recycled, it is modeled as disposed of in a landfill.

5.8.7 Use and Maintenance

The service life of VCT will vary depending on the amount of floor traffic and the type and frequency of maintenance. The level of maintenance is also dependent on the actual use and desired appearance of the floor. For BEES, consistent with the VCT EPD, a lifetime of 25 years has been modeled. Replacement, including production of raw materials, manufacturing, transport to installation, etc., is included to account for the BEES flooring category’s operating lifetime of 60 years.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing manufacturers’ maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. Frequency of deep cleaning and refinishing or polishing, and types and quantities of these compounds will also depend on the maintenance programs developed by individual building owners. For BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published online; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dry mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. Inputs and outputs per cleaning event of regular maintenance are shown Table 5-33.

Table 5-33 Inputs and Outputs per Regular Cleaning Event³⁹

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Solid waste	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Solid waste	0.0077 kg	0.0016 lb

The solid waste is modeled as being transported by diesel truck and disposed of in a landfill. The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance, and this activity is a non-variable in BEES, although as acknowledged above, it may vary from building to building. Table 5-34 and Table 5-35 present the intermittent cleaning and maintenance schedule for VCT flooring and cleaning inputs, respectively (Table 1 in RFCI (2013a)).

Table 5-34 Cleaning Processes and Frequency

<i>Cleaning Process</i>	<i>Frequency</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	Hot water, neutral detergent
Spray buff / finish restorer	1x per month	Floor finish, electricity
Strip and 2 coats finish	1x per year	Finish remover, floor finish, electricity

Table 5-35 VCT Intermittent Cleaning Inputs per Year⁴⁰

<i>Cleaning Input</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	124	11.5
Electricity (kWh)	0.025	0.002
Finish (liter)	0.22	0.02
Finish remover (liter)	0.041	0.004
Water (liter)	6.2	0.58

5.8.8 End of Life

While VCT can be recycled, it is modeled as landfilled at end of life. End of life modeling includes transportation of the VCT and adhesive by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based on ecoinvent end of life waste management process data.

³⁹ Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

⁴⁰ Table 2 in (RFCI, 2013a)

5.9 Cork Flooring

The development of the cork flooring included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.9.1 Product Description

For the BEES analysis, cork floating floor plank has been included. The functional unit for this BEES category is floor covering of 0.09 m² (1 ft²) used over the building's operating lifetime of 60 years. The mass of the product in BEES is 8.0 kg/m² (1.64 lb/ft²) (Amorim EPD, 2013). Most cork flooring is manufactured in Europe, but some is manufactured in the U.S. This product can be used in both residential and commercial applications.

5.9.2 Flow Diagram

The flow diagram in Figure 5-11 shows the major elements of the production of this product as it is modeled for BEES.

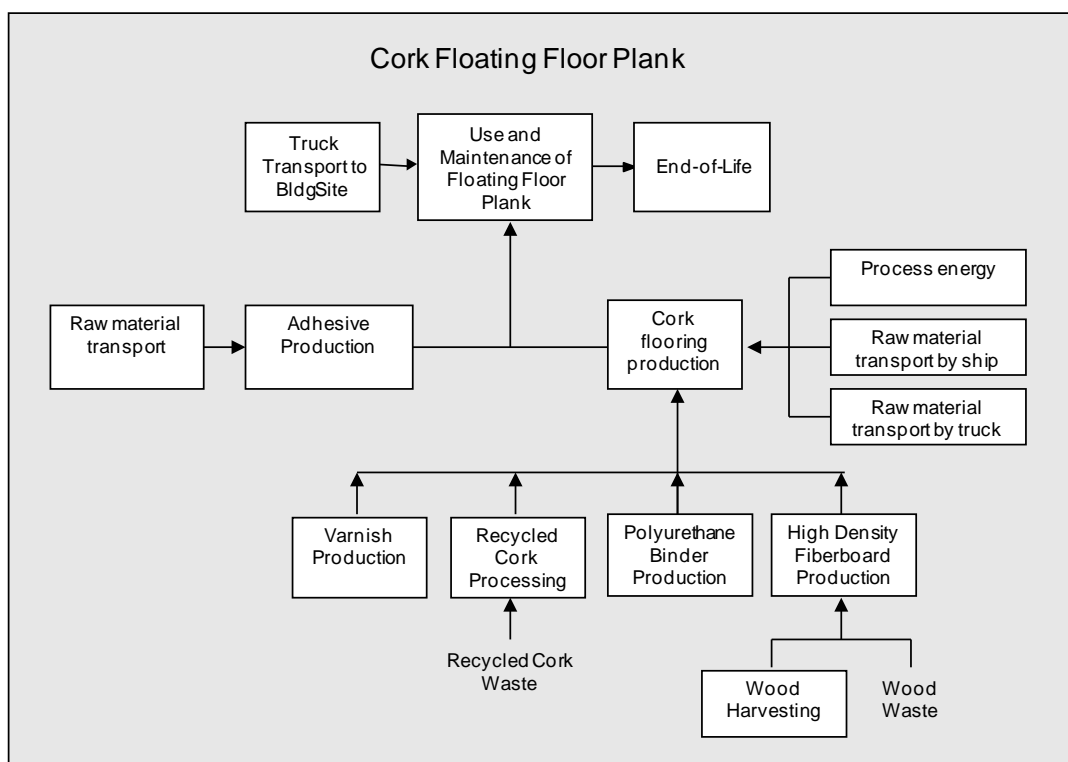


Figure 5-11 Cork Floating Plank Floor System Boundaries

5.9.3 Raw Materials

Floating floor plank is made up of two layers of cork veneer, which is made from a combination of recycled cork waste and urethane binder, with a layer of High Density Fiberboard (HDF) sandwiched in between. The cork veneer has a varnish coating. Data

for the bill of materials is based on the materials listed in Sec. 2.6 of the Amorim EPD (2013), which is shown in Table 5-36.

Table 5-36 Cork Floating Plank Floor Composition

<i>Constituent</i>	<i>Mass Fraction</i>	<i>Mass (kg/m²)</i>	<i>Mass (lb/ft²)</i>
HDF	70.7%	5.66	1.16
Polyurethane (PUR) binder	7.3%	0.58	0.12
Cork	19.7%	1.58	0.32
Varnish	2.3%	0.18	0.04
Total	100 %	8.00	1.64

The cork constituent is a waste byproduct, so the environmental burdens from virgin production of cork are not included. The energy used to grind the cork is included, as is its transport to the manufacturing facility. The binder for the cork is a moisture-cured urethane, and anecoinvent data set for polyurethane (for flexible foam) is used. HDF is produced mostly from recovered wood waste. HDF and acrylic varnish production, modeled as 87.5 % water content, come from ecoinvent. The ecoinvent data are customized to U.S. energy.

The biomass carbon in the cork and fiberboard was modeled as sequestered except for the portion that is assumed to decompose in a landfill (see End of Life section). The carbon content of the cork is assumed to be 56 %, and the carbon content of HDF is assumed to be 48 % of the wood residue in the material.

Transportation distances for shipment of the raw materials from the suppliers to the manufacturing plant is assumed to be 805 kg (500 mi). The materials were transported by diesel truck, based on the U.S. LCI Database.

5.9.4 Manufacturing

Data for manufacturing this cork floor product is based on the data previously in BEES. Cork waste is ground and blended with the urethane binder, then cured. The cork-HDF-cork layers are cured. Electricity and an on-site boiler are used for blending and curing. The boiler uses cork powder generated during the production process to produce steam and electricity. Manufacturing the floating floor plank requires approximately 1 MJ (0.28 kWh) of electricity and 0.9 MJ (0.25 kWh) of thermal energy per 1 ft².⁴¹ Water is also used in the production process. At some facilities, it is recycled and recovered by the plant. Most of the waste generated from manufacturing is used to produce energy.

5.9.5 Transportation

For the U.S. market, the BEES model assumes 90 % production in Europe and 10 % in the U.S. Thus, 90 % of the finished cork floor product is modeled as transported 6020 km (3742 mi) by ocean freighter from Portugal to a port in New York. Once in the U.S., it is

⁴¹ Natural Cork Floor data from Lippiatt (2007)

modeled as transported an average distance of 2414 km (1500 mi). This distance is the same amount assumed for the product manufactured in the U.S. U.S. LCI database was used for transportation.

5.9.6 Installation

Due to the construction of the product, the floating floor planks require only a minimal amount of tongue-and-groove adhesive to bond the individual planks together. Installation waste of 2 % of product is assumed. The installation waste is modeled as transported 48 km (30 mi) by diesel truck and disposed of in a landfill. While some of the packaging waste at installation can be recycled, it is modeled as disposed of in a landfill.

5.9.7 Use and Maintenance

The service life of flooring products will vary depending on the amount of floor traffic and the type and frequency of maintenance. The level of maintenance is also dependent on the actual use and desired appearance of the floor. A lifetime of 30 years has been assumed for the cork floor product. Replacement, including production of raw materials, manufacturing, transport to installation, etc., is included to account for the BEES flooring category's operating lifetime of 60 years.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing manufacturers' maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. Frequency of deep cleaning and refinishing or polishing, and types and quantities of these compounds will also depend on the maintenance programs developed by individual building owners. For BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published online; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dry mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. For residential use the default is set to one time per week. Inputs and outputs per cleaning event of regular maintenance are shown in Table 5-37.

Table 5-37 Inputs and Outputs per Regular Cleaning Event⁴²

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Solid waste	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Solid waste	0.0077 kg	0.0016 lb

The solid waste is modeled as being transported by diesel truck and disposed of in a landfill. The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance, and this activity is a non-variable in BEES, although as acknowledged above, it may vary from building to building. In general, cleaning frequency is based on similar data for other resilient floor coverings. Table 5-38 presents the intermittent cleaning and maintenance schedules for cork.

Table 5-38 Cork Flooring Covering Cleaning Processes and Frequency

<i>Cleaning Process</i>	<i>Frequency-Commercial</i>	<i>Frequency-Residential</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	1x per 2 week	Hot water, neutral detergent
Buff / finish sealer	1x per 2 years ⁴³	1x per 9 years ⁴⁴	Polyurethane sealant, Electricity

The energy, material, and water inputs for this product are presented in Table 5-39. The quantities of detergent, water, and electricity come from the Average Homogeneous Vinyl EPD (RFCI, 2013b), with usage amounts adjusted. The sealant application rate is based on product data for a specific coating.⁴⁵

⁴² Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

⁴³ Polyurethane sealer commercial application timing based on Duro-design cork flooring (<http://www.duro-design.com/index.cfm/page/cork.maintenanceWarranty/>)

⁴⁴ Polyurethane sealer residential application timing based on <http://www.usfloorsllc.com/product-display/natural-cork-5/why-natural-cork/> “Under normal use in a residential environment, a urethane finish should last between 8 – 10 years between refinishing.”

⁴⁵ DuraSeal water-based PUR specification data, retrieved from <http://www.duraseal.com/products/finishes/water-based-polyurethane/>.

Table 5-39 Total Inputs for Intermittent Cleaning per Year^{46,47}

<i>Cleaning Input</i>	<i>Commercial</i>		<i>Residential</i>	
	<i>Per m²</i>	<i>Per ft²</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	119	11.1	59.5	5.5
Electricity (kWh)	0.0009	9 E-5	0.0002	2 E-5
Sealant (kg)	0.086 ⁴⁸	0.007	0.022	0.001
Water (liter)	5.8	0.54	2.9	0.270

5.9.8 End of Life

End of life modeling of the cork flooring includes transportation by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based on ecoinvent end of life waste management process data.

Much of this floor product is sourced from biobased materials, so disposal includes data for both inert material in a landfill and biogenic material in a landfill. Mahalle (2011) and the EPA WARM (WARM, 2015) describe the impacts from biogenic material in a landfill as being made up of CH₄ from decomposition of biomass and CO₂ emissions associated with flaring these emissions where landfill gas is not recovered for energy; and CO₂ emissions avoided through landfill gas-to-energy projects. An assumed 23 % of the wood decomposes, so storage of the remaining biogenic carbon is also accounted for in Section 5.1 of Mahalle (2011). The data for net GHG emissions from landfill gas management practices comes from Table 31 in Mahalle (2011). For cork flooring, this amounts to 0.393 kg CO₂ per kg cork floor and 0.018 kg methane per kg cork floor.

5.10 Generic Composite Marble Tile

The development of the generic composite marble tile included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.10.1 Product Description

Composite marble tile is a type of composition flooring. It is a mixture of polyester resin and matrix filler, colored for a marble effect and poured into a mold to form tiles. The mold is then vibrated to release air and level the matrix. After curing and shrinkage, the tile is removed from the mold, trimmed, and polished if necessary. The functional unit used for BEES is flooring of 0.093 m² (1 ft²) used over the building's operating lifetime of 60 years. The composite marble tile is modeled as 30 cm x 30 cm x 0.95 cm (12 in x

⁴⁶ Inputs based on RFCI (2013a), Table 2 (with usage adjusted).

⁴⁷ Based on RFCI (2013a), Table 2 (with usage adjusted).

⁴⁸ Sealant application rate based on a DuraSeal water-based PUR application rate of 8.81 lb/gal, 500 sf/gal, with 2 coats. <http://www.duraseal.com/products/finishes/water-based-polyurethane/>

12 in x 3/8 in), installed using a latex-cement mortar. It is used in commercial and residential markets.

It should be noted that most of the information described herein is carried over from the previous BEES data.

5.10.2 Flow Diagram

The flow diagram in Figure 5-12 shows the major elements of the production of composite marble tile as modeled in BEES.

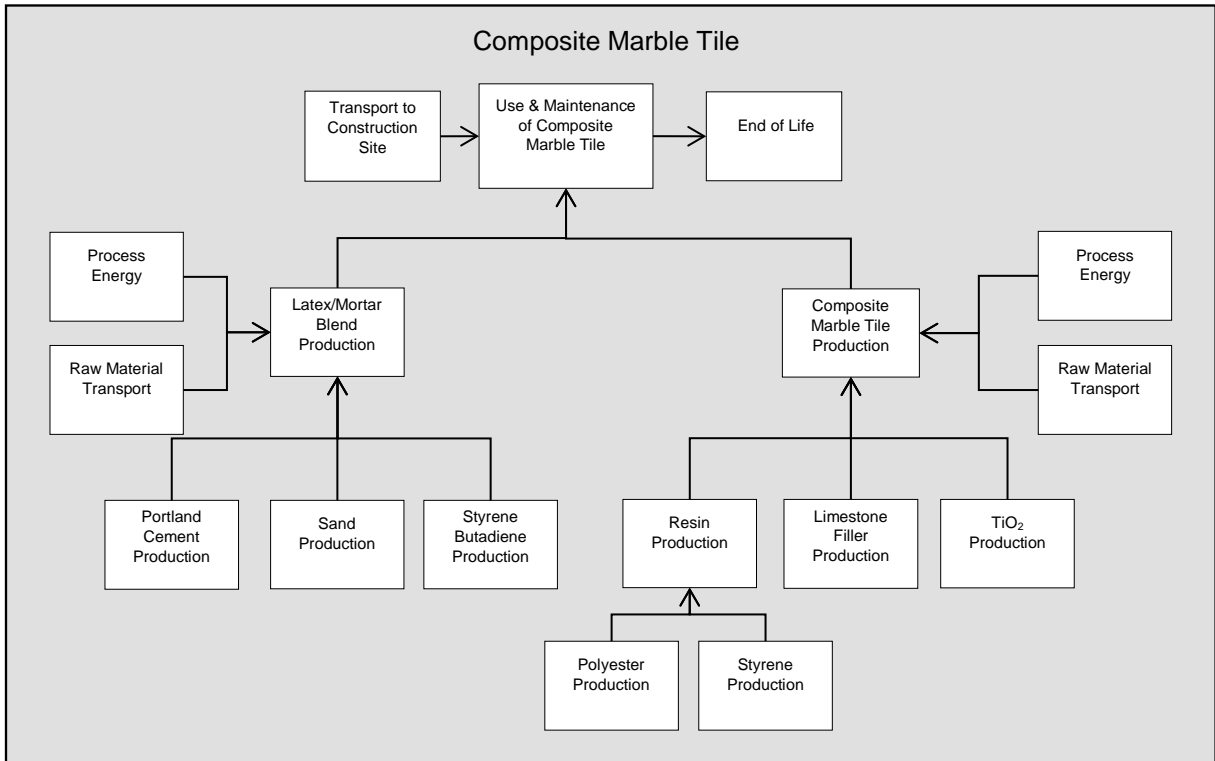


Figure 5-12 Composite Marble Tile System Boundaries

5.10.3 Raw Materials

Table 5-40 gives the constituents included in the marble matrix and their proportions.

Table 5-40 Composite Marble Tile Matrix Composition

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Filler – CaCO ₃	78.25
Resin – PET & styrene	20.0
Pigment (TiO ₂)	1.50
Catalyst (MEKP)	0.24

The resin used in the matrix is an unsaturated polyester resin cross-linked with styrene monomer. The styrene content can range from 35 % to 55 %. An average value of 45 %

is used for the model. The resin percentage of 20 % in Table 5-40 is a weighted average, based on data from four sources ranging from 19 % to 26 % resin content. Data for polyester is based on the U.S. LCI database data for PET resin. Styrene data come fromecoinvent. The cross-linking operation is not included in the model due to lack of available data. The filler is assumed to be calcium carbonate (CaCO₃). It is composed of coarse and fine particles in a combination of two parts coarse to one part fine, and filler production involves the mining and grinding of CaCO₃. Data for CaCO₃ comes fromecoinvent.

The main catalyst in the matrix is modeled as methyl ethyl ketone peroxide (MEKP). This catalyst is used as a solvent in the mixture of resin and filler so is consumed in the process; however, approximately 1 % of the catalyst is composed of unreacted methyl ethyl ketone (MEK), which is assumed to be released during the reaction. The amount of catalyst is assumed to be about 1 % of the resin content, or 0.24 % of the total marble matrix. MEKP is built usingecoinvent data sets for MEK and peroxide. A pigment or colorant may be used if necessary, and the quantity depends on the color required. The colorant is usually added to the mixture before all the filler has been mixed. For the BEES study, titanium dioxide at 1.5 % of the matrix is assumed, and this constituent is modeled usingecoinvent data.

The raw materials are assumed to be transported on average 402 km (250 mi) by truck.

The product is modeled as packaged in cardboard boxes, placed on pallets and wrapped in plastic film. Packaging materials and their transportation to composite marble tile facilities have been included in the BEES model.

5.10.4 Manufacturing

Electricity is the only energy source involved in producing and casting the resin-filler mixture for composite marble tile. The tile is cured at room temperature. Table 5-41 shows electricity use for composite marble tile manufacturing. It is assumed that 1.5 % of the material is lost at manufacture from the trimming process.

Table 5-41 Energy Requirements for Composite Marble Tile Manufacturing

<i>Energy Carrier</i>	<i>MJ/kg (Btu/lb)</i>
Electricity	0.047 (20.3)

Two emissions from composite marble tile manufacturing are fugitive styrene and MEK air emissions. The styrene emissions come from the resin constituent and are assumed to be 2 % of the resin input. The MEK emissions come from the 1 % un-reacted MEK in the catalyst blend. Emissions of styrene from the matrix are assumed to be 0.047 kg/m² (9.6E-3 lb/ft²), and MEK emissions 0.0005 kg/m² (1.0E-4 lb/ft²).

5.10.5 Transportation

Transportation distance of the tile product by heavy-duty truck to the building site is modeled as 805 km (500 mi). Shipping the installation materials to the building site – cement, sand, and latex – is assumed to cover 322 km (200 mi) via diesel truck. Transportation data come from the U.S. LCI database.

5.10.6 Installation

Installing composite marble tile requires a sub-floor of a compatible type, such as concrete. Installation data for ceramic tile in BEES was used for composite marble tile. An EPD for ceramic tile (TCNA, 2014) provided data for amounts of materials needed: mortar in the amount of 4.1 kg/m² (0.833 lb/ft²) and sanded grout in the amount of 0.21 kg/m² (0.043 lb/ft²) are thus used to install composite marble tile. The mortar is modeled as a latex/mortar blend; its constituents are provided in Table 5-42.

Table 5-42 Latex/Mortar Blend Constituents

<i>Constituent</i>	<i>Mass Fraction</i>
Mortar	70 %
Portland Cement	17 %
Sand	83 %
Styrene-Butadiene Latex	30 %

The sanded grout is modeled as a mixture of Portland cement and sand with smaller amounts of titanium dioxide as pigment and other additives. The installation materials were modeled using ecoinvent and U.S. LCI database data. Installation of tile and mortar is assumed to be a manual process, so there are no emissions or energy inputs.

The scrap generated during installation is assumed to be 4.5 % of the total flooring material (TCNA, 2014). While the flooring material could be recycled, it is modeled as transported 48 km (30 mi) by diesel truck and disposed of in a landfill. Packaging waste is also modeled as disposed of in a landfill, although it is acknowledged that it could be recycled.

5.10.7 Use and Maintenance

With proper maintenance and installation, A 60-year service life is given to the composite marble tile flooring as it is expected to last at least as long as the building itself.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing manufacturers’ maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. Frequency of deep cleaning and refinishing or polishing, and types and quantities of these compounds will also depend on the maintenance programs developed by individual building owners. For BEES, cleaning and maintenance is

modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published online; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dry mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. For residential applications, this default value is one time per week. Inputs and outputs per cleaning event of regular maintenance are shown in Table 5-43.

Table 5-43 Inputs and Outputs per Regular Cleaning Event⁴⁹

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Solid waste	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Solid waste	0.0077 kg	0.0016 lb

The solid waste is modeled as being transported by diesel truck and disposed of in a landfill. The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance, and this activity is a non-variable in BEES, although as acknowledged above, it may vary from building to building. Table 5-44 and Table 5-45 present the intermittent cleaning and maintenance schedule and inputs for composite marble tile, respectively; composite marble tile flooring was assumed to have similar maintenance requirements as VCT, so Table 1 in RFCI (2013a) was consulted.

Table 5-44 Cleaning Processes and Frequency

<i>Cleaning Process</i>	<i>Frequency – Commercial</i>	<i>Frequency – Residential</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	1x per 2 weeks	Hot water, neutral detergent
Spray buff / finish restorer	1x per month	1x per 6 months	Floor finish, Electricity
Strip and two coats finish	1x per year	1x per 2 years	Finish remover, floor finish, Electricity

⁴⁹ Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

Table 5-45 Composite Marble Tile Intermittent Cleaning Inputs per Year⁵⁰

<i>Cleaning Input</i>	<i>Commercial</i>		<i>Residential</i>	
	<i>Per m²</i>	<i>Per ft²</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	124	11.5	62	5.8
Electricity (kWh)	0.025	0.002	0.01	0.001
Finish (liter)	0.22	0.02	0.07	0.007
Finish remover (liter)	0.041	0.004	0.01	0.001
Water (liter)	6.2	0.58	3.1	0.29

5.10.8 End of Life

Composite marble tile is modeled as being landfilled at end of life. End of life modeling includes transportation of the flooring and installation materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data.

5.11 Generic Hardwood Flooring

The development of the generic hardwood flooring included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.11.1 Product Description

Solid hardwood and engineered wood floors have been included in the floor coverings category of BEES. The solid hardwood floor data in BEES are based on an average of solid strip hardwood flooring and solid plank hardwood flooring. Hubbard and Bowe (2008) provides the range of dimensions for solid strip and solid plank hardwood: solid strip has face widths of 38.1 mm (1.5 in), 57.2 mm (2.25 in) and 82.5 mm (3.25 in), and solid plank has face widths of 76.2 mm (3.0 in) to 203 mm (8.0 in) and higher. Typical thicknesses are 7.62 mm (1/3 in), 12.7 mm (0.5 in), and 19 mm (0.75 in). For BEES, 0.093 m² (1 ft²) with the most common thickness of 19 mm (0.75 in) is used over the building's operating lifetime of 60 years.

Engineered wood flooring consists of several sheets of solid wood (veneer) bonded together with an adhesive under heat and/or pressure. Engineered wood floors are available in plies, or layers, ranging from 2 to 9 sheets, and 3 and 5 plies are most common. The engineered wood LCA supplies typical thicknesses, which range from 6.4 to 14.3 mm (1/4 to 9/16 in) (Bergman & Bowe, 2011). For BEES, 0.093 m² (1 ft²) of engineered wood flooring with 9.5 mm (3/8 in) thick floor planks is used over the building's operating lifetime of 60 years.

Both products in BEES are modeled as factory-finished, or pre-finished. Prefinishing at the factory keeps the application of all the coatings and sealants in the manufacturing

⁵⁰ Table 2 (with quantities adjusted for residential) in RFCI (2013a)

setting, avoiding excess volatile emissions at the installation site. The trade-off is that prefinishing operations use a large amount of electricity to capture and destroy the emissions from the coating operations, so from a resources point of view, the environmental impacts are greater (Mahalle, 2011). Wood flooring in BEES is applicable to the commercial and residential markets. Table 5-46 provides the thickness and mass per area of each product.

Table 5-46 Wood Flooring Products in BEES

<i>Products</i>	<i>Nominal Thickness mm (in)</i>	<i>Mass per Applied Area kg/m² (lb/ft²)</i>
Solid Hardwood	19 (0.75)	12.5 (2.56) ⁵¹
Engineered wood	9.5 (0.375)	6.24 (1.28) ⁵²

5.11.2 Flow Diagram

The flow diagram in Figure 5-13 and Figure 5-14 presents the major elements of the production of these products, as they are modeled for BEES.

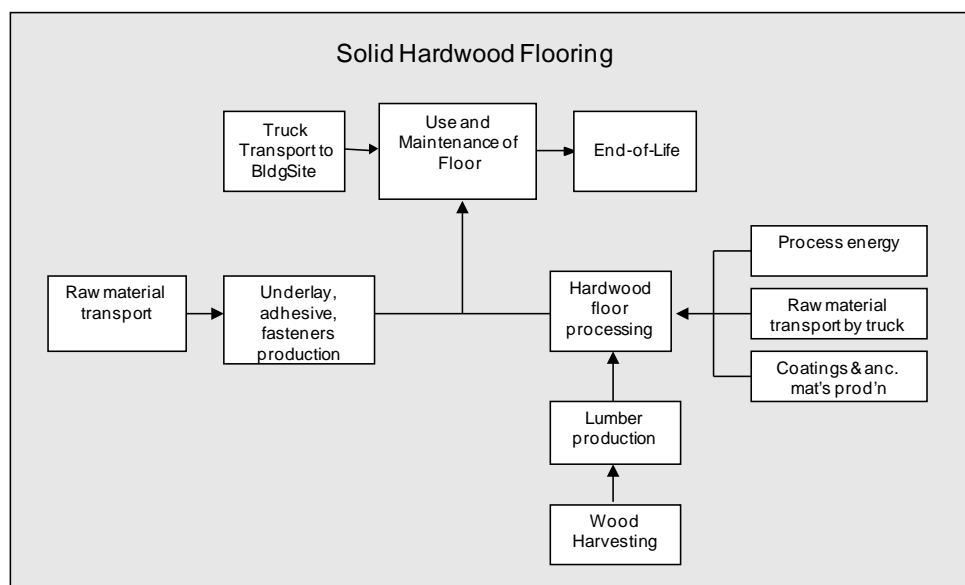


Figure 5-13 Solid Hardwood Flooring System Boundaries

⁵¹ Hubbard and Bowe (2008), p. 13.

⁵² Based on an oven-dry density provided in Bergman and Bowe (2011) of 656 kg/m³ (40.9 lb/ft³) of engineered floor.

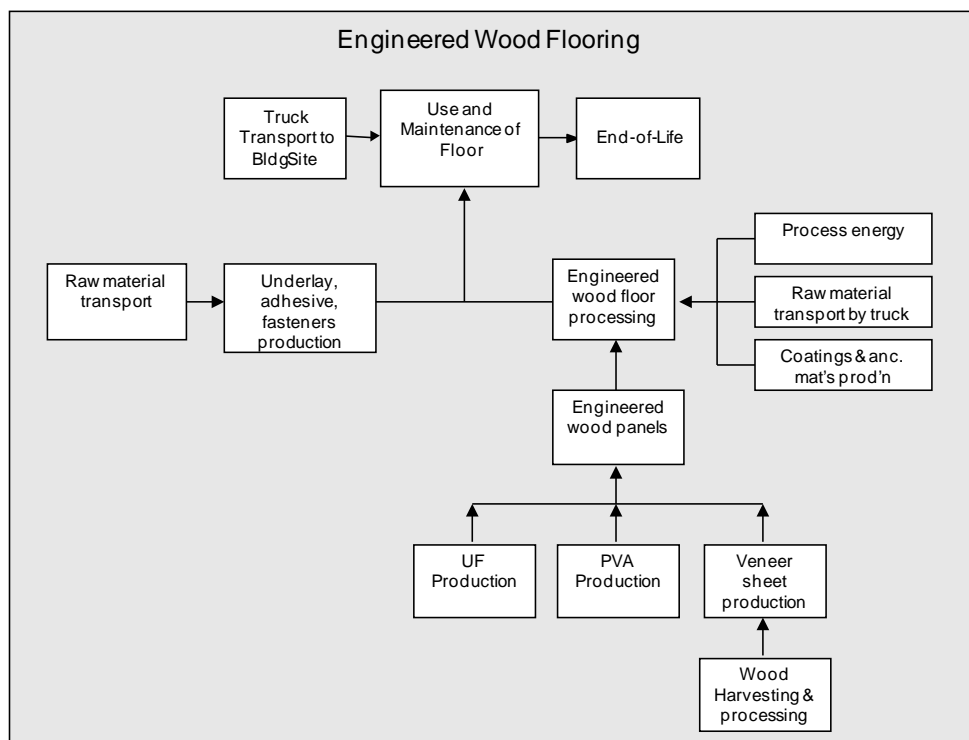


Figure 5-14 Engineered Wood Flooring System Boundaries

5.11.3 Raw Material Production & Manufacturing

The data for the cradle to gate production of solid hardwood floors is taken from Mahalle (2011), which took their data directly from Athena (2010). The unit processes included are described as follows and shown in Figure 5-15.

- **Drying.** Rough green lumber is dried in kilns fueled by wood waste. The lumber is typically dried to a final moisture content of between 6 % and 9 % (oven dry basis).
- **Milling.** At the mill, dried lumber is planed, ripped, trimmed, and moulded. Planing puts the lumber into more even thicknesses (into uniform tolerance limits) while also producing smooth face surfaces which aid visual grading and sorting. Ripping involves feeding dry, planed, random width lumber along its length through a rip-saw to create uniform widths. Trimming is done to eliminate lumber defects while crosscutting the lumber into desired lengths using a chop saw. The output of this process is stock of desired lengths within defect tolerances required of the final flooring product. Finally, moulding is done to create fitting pieces (i.e., tongue and grooves) and to generally aid in seamless installation.
- **Finishing and packaging.** The product is prefinished with application of stains and coatings, then cured, and finally packaged.

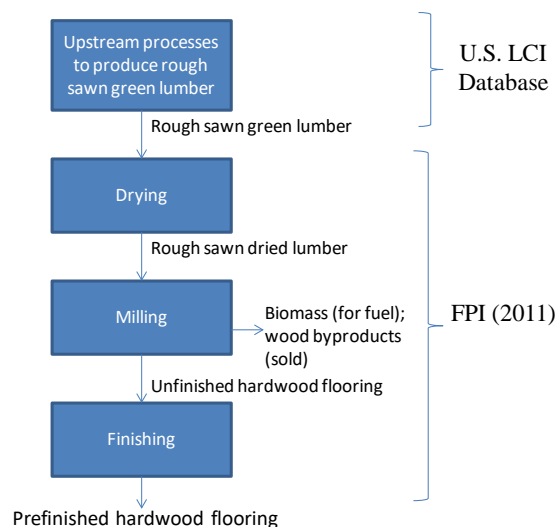


Figure 5-15 Solid Hardwood Flooring Unit Processes

Table 8 through Table 10 in Mahalle (2011) provide the detailed data used to model the product in BEES, including material inputs, energy, waste flows, and packaging. Data are from manufacturing facilities in eastern Canada for the production year 2008. Data for lumber production come from the U.S. LCI database. The data, despite being Canadian, still represent a good portion (40 %) of North American hardwood flooring production. For purposes of the BEES system boundaries, the lumber that makes up the flooring is considered the upstream raw material input.

The milling process produces an extensive amount of wood co-products, including wood waste used for fuel or biomass byproducts. BEES used the same co-product allocation modeling as that used by Athena (2010): all inputs and outputs were fully allocated to the primary product – lumber used for solid hardwood flooring. Even though the co-products account for approximately 60 % of the mass of outputs, Athena estimated that the co-products accounted for no more than 5 % of the revenue to the manufacturer, so most, if not all the environmental inputs and outputs should be carried with the main product. This modeling is conservative to the flooring product.

The biomass carbon in the hardwood floor was modeled as sequestered except for the portion that is assumed to decompose in a landfill (see End of Life section). The carbon content of the wood is modeled at 48 %, based on a survey of lumber mills (Section 3.1.1.4 in Mahalle (2011)).

The data for the cradle to gate production of engineered wood floors is taken from Bergman and Bowe (2011) and shown in Figure 5-16. Sec 14.1 in this study provides the detailed data tables that were used to model the product in BEES, and the three unit processes included are: (Bergman and Bowe (2011), Sections 3.6 through 3.8)

- **Lay up:** involves bonding thin veneer sheets or plies together with urea-formaldehyde (UF) and polyvinyl acetate (PVA) resin to form panels.

- Trimming, sanding, sawing, and moulding. Veneer panels are trimmed to standard dimensions, 1.22 m by 2.44 m (4 ft by 8 ft). The trimmed panels are sawn into individual boards and sanded. After sanding, the boards are moulded (profiled) into tongue and groove flooring of random lengths.
- Prefinishing is the set of processes aimed at finishing and protecting the unfinished surface. These processes include sanding, priming, staining, filling, curing, sealing, and topcoating.

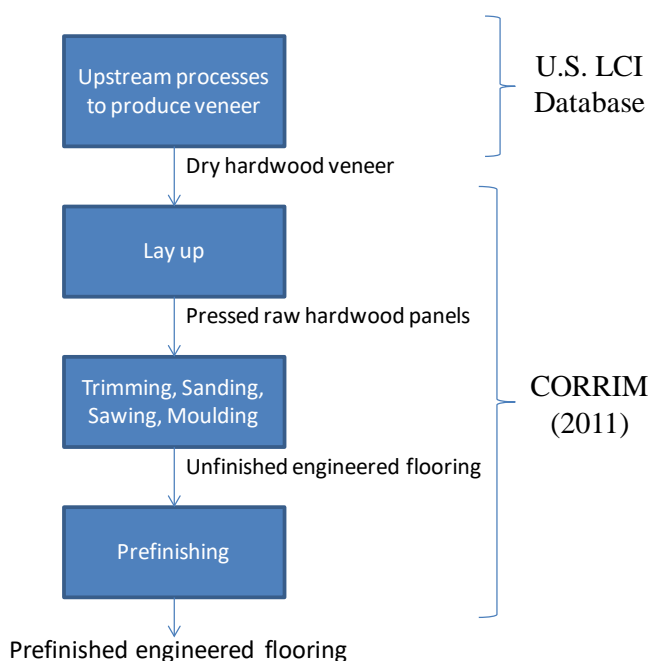


Figure 5-16 Engineered Wood Flooring Unit Processes

The data tables list out material, energy, and water inputs, plus air emissions and waste flows. The data sets are primary data collected from facilities in the Eastern U.S. for the production year 2007. For purposes of the BEES system boundary, veneer production and drying are considered the raw material input. Data for these processes come from the U.S. LCI database.

Co-product allocation is modeled consistent with the approach taken for hardwood flooring, in which the main wood-based products (e.g., unfinished engineered flooring) carry the full burden of the inputs and outputs, and the co-products (e.g., sawdust, shavings, and sanding dust) are assigned a value of zero due to disproportionately less value. The biomass carbon in the engineered wood floor was modeled as sequestered except for the portion that is assumed to decompose in a landfill (see End of Life section). The wood component of the engineered floors is 88.2 % of the final product mass and carbon content of the wood is modeled at 51.7 % (Bergman & Bowe, 2011).

The upstream wood and lumber production comes from the U.S. LCI database. UF and PVA resin, the two other main components making up the engineered wood panel, were

based on ecoinvent. For coatings, ancillary materials and other inputs, ecoinvent data, customized to U.S. energy, were used. In the few cases where U.S. LCI database data was available, this data set was used. The data representing transportation of the materials to manufacturing are included in the detailed data sets in the reports.

Packaging materials and their transportation to wood flooring facilities have been included in the BEES model. Packaging includes shrink wrap, plastic and steel strapping, corrugated cardboard, and wood pallets. Quantities for these materials are included in the detailed data sets in the referenced reports.

5.11.4 Transportation

Transportation distance of wood floors by heavy-duty truck to the building site is modeled as 805 km (500 mi). Data come from the U.S. LCI Database.

5.11.5 Installation

Data for installation of materials for both products is based on page 1 of the Quebec Wood Export Bureau EPD on solid strip hardwood flooring, and these quantities are presented in Table 5-47. Both a plywood underlay and a polyethylene vapor barrier, which prevents moisture from coming through the floor, are installed under the products. The solid hardwood floor uses nails as fasteners, while the engineered wood floor assumes staples as its fasteners.

Table 5-47 Installation Materials – Wood Flooring

<i>Constituent</i>	<i>Quantity (kg/m²)</i>	<i>Quantity (lb/ft²)</i>
Plywood underlay (16 mm)	10.8	2.2
Polyethylene vapor barrier (0.15 mm)	0.14	0.029
Carpenter’s glue	0.07	0.014
Solid hardwood fasteners: galvanized steel nails (4 nails, 2 in, 18 gauge)	0.0018	0.0004
Engineered wood fasteners: galvanized steel staples (4 staples, 1.25 in, 18 gauge) ⁵³	0.0025	0.0005

An ecoinvent dataset on vinyl acetate was used for the carpenter’s glue, and the other installation materials came from the U.S. LCI database. Installation is primarily a manual process, so no energy use is modeled for the installation phase. The plywood is modeled as having 49.9 % biomass carbon (UL Environment, 2013a).

The scrap generated during installation is estimated to be 0.5 % of the total flooring material (Table 10 in Mahalle (2011)). The wood flooring is modeled as transported 48 km (30 mi) by diesel truck and disposed of in a landfill. Packaging waste is also modeled as disposed of in a landfill, although it is acknowledged that much of these could be recycled.

⁵³ Data from Hosking (2012)

5.11.6 Use and Maintenance

A 60-year service life is given to these flooring products as they are expected to last at least as long as the building itself.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing building maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. For all flooring products in BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published online; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dust mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. For residential use, the default is set to one time per week. The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance where applicable, and this activity is a non-variable in BEES, although as acknowledged above, it may vary from building to building. Inputs and outputs per regular maintenance cleaning event are shown in Table 5-48.

Table 5-48 Inputs and Outputs per Regular Cleaning Event⁵⁴

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Dust & dirt removed	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Dust & dirt removed	0.0077 kg	0.0016 lb

The dust and dirt removed is modeled as being transported by diesel truck and disposed of in a landfill.

Guidelines for intermittent cleaning processes come from Armstrong commercial flooring maintenance guide’s section on hardwood flooring (Armstrong Maintenance, 2014). The frequency of commercial cleaning is based loosely on these guidelines so assumptions have been made for BEES, as has been done for residential cleaning frequency. The recoating with sealant is based on manufacturer and finish product recommendations but it is reminded that variability from one building to the next could

⁵⁴ Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

be great. Table 5-49 presents the intermittent cleaning and maintenance schedules and Table 5-50 presents the energy and material inputs to clean the products over the course of 1 year.

Table 5-49 Hardwood and Engineered Wood Floor Cleaning Processes and Frequency

<i>Cleaning Process</i>	<i>Frequency-Commercial</i>	<i>Frequency-Residential</i>	<i>Resources Used</i>
Neutral hardwood floor cleaner with micro-fiber mop	1x per week	1x per 2 weeks	Floor cleaner
Buffing with hardwood floor cleaner	1x per month	1x per year	Floor cleaner, electricity
Recoating and resurfacing with sealant	1x per 7 years	1x per 7 years	Electricity, polyurethane finish

Table 5-50 Intermittent Cleaning Inputs per Year

<i>Cleaning Input</i>	<i>Commercial</i>		<i>Residential</i>	
	<i>Per m²</i>	<i>Per ft²</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	119	11.1	59.5	5.5
Electricity (kWh)	0.023	0.002	0.002	0.0002
Polyurethane sealant (kg)	0.023	0.002	0.022	0.002

Due to lack of available data on actual usage quantities for hardwood floors, data come from an EPD on resilient flooring, with the data adjusted on a per-event basis (RFCI, 2013b). The sealant application rate is based on product literature on application rates.⁵⁵

5.11.7 End of Life

End of life modeling of the wood flooring, plywood underlayment, and other installation materials includes transportation of these materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill. Truck transportation is based on the U.S. LCI database, and disposal in a landfill is modeled based on ecoinvent end of life waste management process data. The mass that is not biobased (e.g., nails) is assumed to be inert material in a landfill. The rest of the mass is modeled as biogenic material disposed of in a landfill. Mahalle (2011) and EPA’s WARM describe the impacts from biogenic material in a landfill as being made up of CH₄ from decomposition of biomass and CO₂ emissions associated with flaring these emissions where landfill gas is not recovered for energy; and CO₂ emissions avoided through landfill gas-to-energy projects. An assumed 23 % of the wood decomposes, so storage of the remaining biogenic carbon is also accounted for in Section 5.1 of Mahalle (2011). The data for net GHG emissions from landfill gas management practices comes from FPI (2011) Table 31. For the wood

⁵⁵ DuraSeal water-based PUR application data retrieved from <http://www.duraseal.com/products/finishes/water-based-polyurethane/>.

flooring, these emissions amount to 0.3607 kg CO₂ per kg wood and 0.0166 kg methane per kg wood (Table 31 in Mahalle (2011)).

5.12 Generic Nylon Carpet

The development of the generic nylon carpet included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.12.1 Product Description

For the BEES analysis, a broadloom carpet with a nylon face weight of 1.0 kg/m² (30 oz/yd²) and modular carpet, or carpet tile, with nylon face weight of 0.81 kg/m² (24 oz/yd²) were studied. The functional unit used for this BEES category is a flooring covering of 0.09 m² (1 ft²) used over the building's operating lifetime of 60 years. The mass for the 0.09 m² (1 ft²) nylon broadloom carpet in BEES is 2.2 kg/m² (0.45 lb/ft²) and the mass for 0.09 m² (1 ft²) of nylon carpet tile is 4.8 kg/m² (0.98 lb/ft²). The broadloom carpet can be used in both residential and commercial applications. The modular carpet is applicable for commercial use in BEES.

5.12.2 Flow Diagram

The flow diagrams in Figure 5-17 and Figure 5-18 show the major elements of the production of this product, as it is currently modeled for BEES.

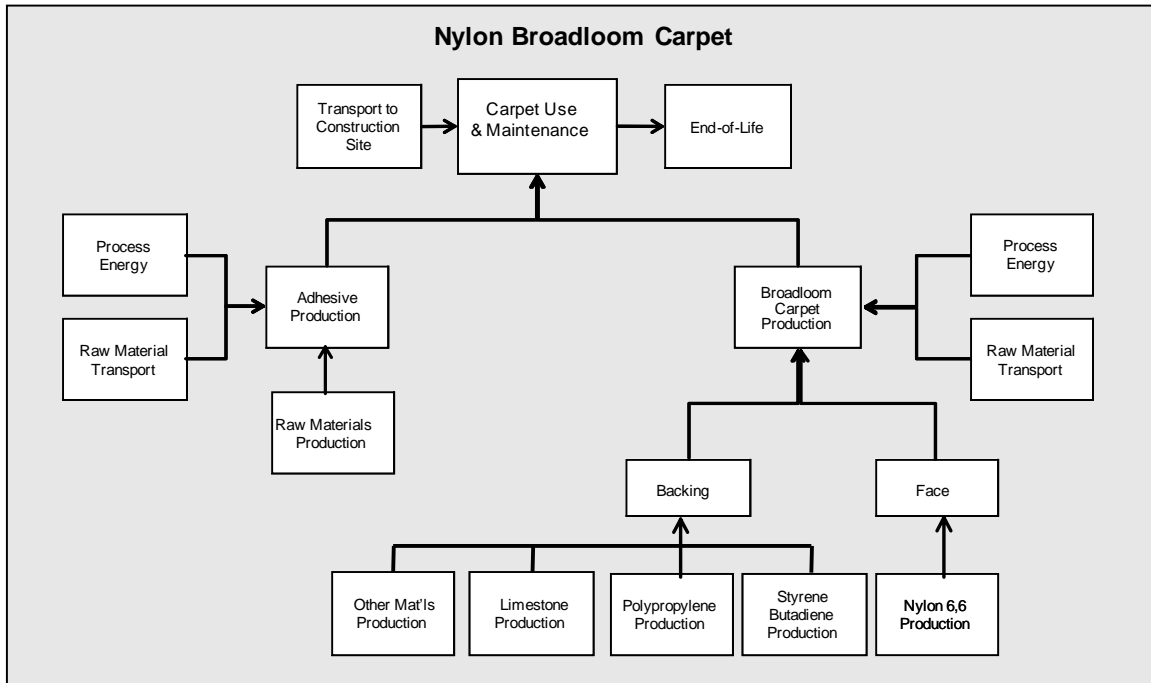


Figure 5-17 Nylon Broadloom Carpet System Boundaries

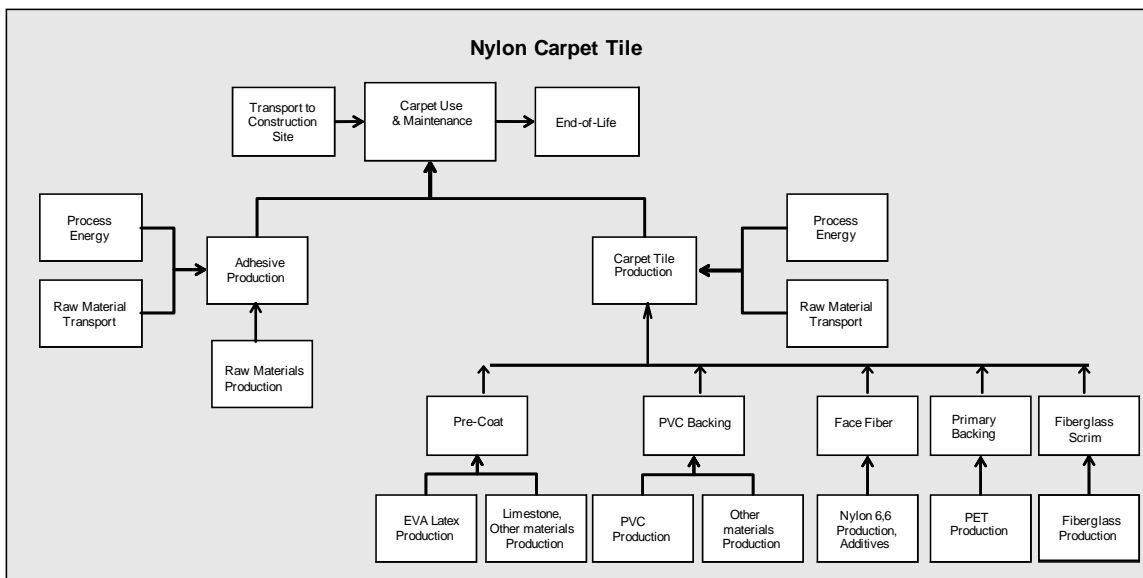


Figure 5-18 Nylon Carpet Tile System Boundaries

5.12.3 Raw Materials

The composition of broadloom carpet and carpet tiles differs significantly. Broadloom carpeting consists of the face and a mix of materials that make up the backing of the product. Modular carpet consists of the face and a mix of materials making up several functional layers of the product; specifications are provided in Table 5-51.

Table 5-51 Nylon Carpet Constituents

Constituent	Material	g/m ²	oz/yd ²
Broadloom			
Face Fiber	Nylon 6,6	1016	30
Backing	Limestone	610	18
	Polypropylene (PP)	237	7
	Styrene butadiene (SB) latex	373	11
	Aluminum trihydrate	203	6
	Stainblocker	0.3	0.01
	Other additives	1.7	0.05
Total		2442	72
Tile			
Face Fiber	Nylon 6,6	814	24
Primary backing	PET woven	119	3.5
Pre-coat	EVA latex	288	8.5
	Limestone	85	2.5
	Aluminum hydroxide	475	14
	Other additives	17	0.5
	Vinyl Backing	PVC resin	610
Vinyl Backing	Limestone	1831	54
	DOTP plasticizer (replacing DINP)	644	19.0
	Lime	34	1.0
	Other additives	85	2.5
	Fiberglass	Fiberglass	68
Total		5070	149.5

Data for the materials in the nylon face carpets are generally derived from either U.S. LCI database or ecoinvent data sets. Polypropylene (PP), PET, and PVC resins come from the U.S. LCI database. An acrylonitrile-butadiene-styrene copolymer resin data set, also from U.S. LCI database, was used as a proxy for the Styrene butadiene (SB) latex. Ecoinvent datasets, customized to U.S. energy, were used for the remainder of the materials, except for the plasticizer, which is a confidential data set based on one U.S. manufacturer’s late 2010’s primary data. Also, aluminum hydroxide (ecoinvent) was used as a proxy for aluminum trihydrate. No data were available to include the stainblocker or other additives in the products, but these constituents make up 0.1 % and 1.6 % of the broadloom and tile carpet bills of materials, respectively.

Transport distance of raw materials to the carpet manufacturing plant is assumed to be 402 km (500 mi) on average by truck. Data are based on the U.S. LCI database.

Production of product packaging components, as well as their transport to carpet manufacturing facilities, has been included in the BEES model. Broadloom carpet is modeled as rolled onto a recycled content cardboard core and secured in plastic. Carpet tiles are modeled as packaged in recycled content cardboard boxes, stacked on wooden pallets, and secured with stretch wrap. These data are based on the measured quantities provided by Tاندوس Centiva for their roll and modular products in BEES.

5.12.4 Manufacturing

Carpet manufacturing consists of several steps, including formation of the synthetic fibers; dyeing of the fibers; and construction, treatment, and finishing of the carpet. For both nylon carpet types, the nylon material is made into fibers and then ‘tufted’ to produce the carpet face. The face yarn is attached, using a primary coating and tufting needles, to the polymer backing. The energy requirements for these process steps are provided in Table 5-52.⁵⁶

Table 5-52 Energy Requirements for Nylon Carpet Manufacturing

<i>Energy Carrier</i>	<i>Broadloom per m² (per ft²)</i>	<i>Tile per m² (per ft²)</i>
Electricity	0.61 kWh (0.06 kWh)	0.61 kWh (0.06 kWh)
Fuel Oil	5.0 MJ (437 Btu)	3.5 MJ (306 Btu)
Heating Steam	1.67 MJ (145 Btu)	2.4 MJ (207 Btu)

Emissions associated with the manufacturing process arise from the production of electricity and the combustion of fuel oil and natural gas, and are based on the U.S. LCI database.

Approximately 4 % waste is generated from the production of nylon broadloom carpet and carpet tile, and this may include trim waste, customer returns, off-specification production, and sew off. All waste is assumed to be disposed of in a landfill; transportation to the landfill by diesel truck and management of the waste in a landfill is accounted for.

5.12.5 Transportation

Transportation of the products to the building site is done by heavy-duty truck, and 805 km (1500 mi) was modeled as the default distance, assuming the majority of carpets are being transported from the Southeast U.S. to various parts of the U.S. Data are based on the U.S. LCI database.

5.12.6 Installation

Nylon broadloom carpet and nylon carpet tiles are installed using either standard latex glue or a low-VOC latex glue. For the tile, typical glue application is 0.129 kg/m² (0.026 lb/ft²) of installed tile. For the broadloom carpet, 0.63 kg/m² (0.129 lb/ft²) is applied to the product. Water-based adhesive formulations today are used far more often than conventional solvent-based adhesives which are known to emit higher levels of VOCs. Because of the broad selection of adhesives on the market and, thus, varying levels of VOCs that could be emitted after installation, the VOC emissions limits for sealants and adhesives, set out in SCAQMD (2011), have been used for the baseline carpet adhesive

⁵⁶ Data carried over from previous version of BEES.

used in BEES, or 50 g/l (0.4 lb/gal) (Table 1 in SCAQMD (2011)). A “low-VOC” alternative is also offered for the BEES user; here, the adhesive is modeled as having a negligible VOC content. Adhesive off-gassing is included for each installation.

For the broadloom carpet used for residential applications, a rubber slab underlayment of 0.058 kg/ft² (0.128 lb/ft²) is installed (Table 28 in Mahalle (2011)). Since the rubber slab is considered a durable underlayment material, it is modeled as being replaced at every other new carpet installation.

Installation is primarily a manual process, so no energy use is modeled for the installation phase. Ecoinvent datasets were used to build the adhesive and for the rubber underlayment. Installation scrap varies depending on the job size. It is estimated that, on average, the scrap generated during installation is 4.5 % of the broadloom carpet and 2 % of the carpet tile. Installation waste is modeled as being transported 48 km (30 mi) by diesel truck and disposed of in a landfill. While some of the packaging waste at installation can be recycled, it is modeled as disposed of in a landfill. No glue is assumed to be wasted during the installation process.

5.12.7 Use and Maintenance

The service life of carpets varies depending on the amount of floor traffic and the type and frequency of maintenance. The level of maintenance is also dependent on the actual use and desired appearance of the floor. For BEES, the nylon face broadloom and tile carpets are modeled as having lifetimes of 11 and 15 years, respectively. Replacement, including production of raw materials, manufacturing, transport to installation, etc., is included to account for the BEES flooring category’s operating lifetime of 60 years.

BEES includes cleaning and maintenance of the floor covering products during their useful lifetime. Because of maintenance programs developed by individual building owners and different manufacturers’ maintenance recommendations, there is no single maintenance regimen that is always followed. For example, frequency of deep cleaning and types and quantities of cleaning solutions will depend on the maintenance programs at the buildings. For BEES, cleaning and maintenance of the floor products is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published on-line; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular vacuuming of dirt and dust is a variable in BEES. The BEES user chooses the vacuuming frequency per week. The second part of cleaning is characterized as intermittent deeper cleaning – for carpets, this activity is extraction cleaning. This deep cleaning is a non-variable in BEES, although as acknowledged above, frequency may vary from building to building.

The carpet cleaning data are based on recommendations in the CRI Carpet Maintenance Guidelines for Commercial Applications for regular vacuuming and intermittent

extraction cleaning (CRI, 2014). For BEES, the default number for commercial carpets is 4 times per week, averaging out the vacuuming needs of different traffic volumes (CRI (2014), p.18/30). Residential vacuuming occurs one time per week (default). The commercial carpet is modeled as being deep cleaned two times per year while the residential carpet is modeled as being deep cleaned one time per year. Specific input and output data for vacuuming and deep cleaning come from a carpet cleaning and maintenance report prepared by the CCACTI. Table 5-53 through Table 5-55 provide the energy and other inputs and outputs used for carpet care. Data are from Table 6, Table 8, and Table 10 in Lu et al. (2008).

Table 5-53 Energy per Cleaning Event

<i>Electrical energy</i>	<i>MJ per sy</i>	<i>kWh per sf</i>
Vacuum	0.012	3.70E-04
Agitator (deep clean)	0.009	2.78E-04
Heat for 120°F hot water (deep clean)	0.144	4.44E-03
Extractor (deep clean)	0.023	7.10E-04
Fan drying (deep clean)	0.087	2.69E-03

Table 5-54 Inputs per Cleaning Event

<i>Input</i>	<i>kg per sy</i>	<i>lb per sf</i>
Water	0.034	8.33E-03
Detergent	0.0012	2.94E-04
Hot water	1.44	0.353

Table 5-55 Outputs per Cleaning Event

<i>Output</i>	<i>kg per sy</i>	<i>lb per sf</i>
Solid waste from the vacuum	0.0064	1.57E-03
Water output after extraction	1.44	0.353
Detergent effluents	0.00085	2.08E-04
Solid waste from extraction	0.012	2.94E-03

5.12.8 End of Life

While there are recycling programs in place for carpets, the products are modeled as landfilled at end of life. End of life modeling includes transportation of the products, their underlayment (where applicable), and adhesive by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is based on ecoinvent end of life waste management process data.

5.13 Generic Polyester (PET) Broadloom Carpet

The development of the generic PET broadloom carpet included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.13.1 Product Description

For the BEES analysis, a broadloom carpet with a PET face weight of 1.12 kg/m² (35 oz/yd²) is included. The functional unit used for this BEES category is floor covering of 0.09 m² (1 ft²) used over the building's operating lifetime of 60 years. The mass modeled for 0.09 m² (1 ft²) PET carpet in BEES is 2.6 kg/m² (0.53 lb/ft²). The PET broadloom carpet is used in a residential application.

5.13.2 Flow Diagram

The flow diagram in Figure 5-19 shows the major elements of the production of this product, as it is currently modeled for BEES.

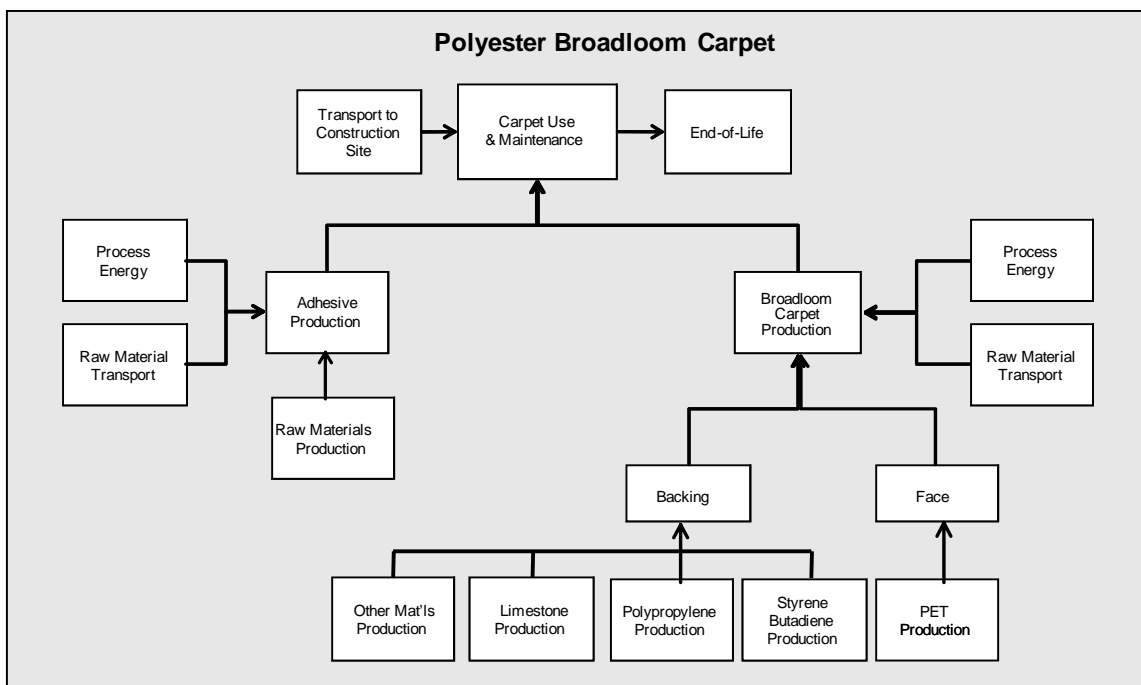


Figure 5-19 PET Broadloom Carpet System Boundaries

5.13.3 Raw Materials

PET broadloom carpet consists of the PET face and a mix of materials that make up the backing of the product. Materials are provided in Table 5-56.

Table 5-56 Polyester Broadloom Carpet Constituents

<i>Constituent</i>	<i>Material</i>	<i>g/m²</i>	<i>oz/yd²</i>
Face Fiber	PET (Polyester)	1 187	35
Backing	Limestone	610	18
	Polypropylene (PP)	237	7
	Styrene butadiene (SB) latex	373	11
	Aluminum trihydrate	203	6
	Stainblocker	0.3	0.01
	Other additives	1.7	0.05
Total		2 613	77

Data for the materials in this product are from the U.S. LCI database or ecoinvent database. PET and PP resins come from the U.S. LCI database. An acrylonitrile-butadiene-styrene copolymer resin data set, also from U.S. LCI database, was used as a proxy for the SB latex. Ecoinvent datasets, customized to U.S. energy, were used for the remainder of the materials. Aluminum hydroxide, an ecoinvent data set, was used as a proxy for aluminum trihydrate. No data were available to include the stainblocker or other additives in the products, but these make up less than 0.1 % of the mass of the materials.

Transport of raw materials to the carpet manufacturing plant is assumed to be 402 km (500 mi) on average by truck. Data are based on the U.S. LCI database.

Production of product packaging components, as well as their transport to carpet manufacturing facilities, has been included in the BEES model. Broadloom carpet is modeled as rolled onto a recycled content cardboard core and secured in plastic. This data are based on the measured quantities provided by Tandus Centiva for their roll products in BEES.

5.13.4 Manufacturing

Carpet manufacturing consists of several steps, including formation of the synthetic fibers; dyeing of the fibers; and construction, treatment, and finishing of the carpet. No data were available for PET carpet manufacturing, so nylon face carpet manufacturing data were used,⁵⁷ as shown in Table 5-57.

Table 5-57 Energy Requirements for PET Carpet Manufacturing

<i>Energy Carrier</i>	<i>Quantity per m² (per ft²)</i>
Electricity	0.61 kWh (0.06 kWh)
Fuel Oil	5.0 MJ (437 Btu)
Heating Steam	1.67 MJ (145 Btu)

⁵⁷ Data carried over from previous version of BEES.

Emissions associated with the manufacturing process arise from the production of electricity and the combustion of fuel oil and natural gas, and are based on the U.S. LCI Database.

Approximately 4 % waste is generated from the production of PET broadloom carpet, and this waste may include trim waste, customer returns, off-specification production, and sew off. All waste is assumed to be disposed of in a landfill; transportation to the landfill by diesel truck and management of the waste in a landfill is accounted for.

Assuming a similar quantity of water use as the nylon broadloom operations, approximately 0.96 kg/m^2 (0.20 lb/ft^2) of water is modeled as consumed during the manufacture of PET broadloom carpet.

5.13.5 Transportation

Transportation of the products to the building site is done by heavy-duty truck, and 805 km (1 500 mi) was modeled as the default distance, assuming the majority of carpets are being transported from the Southeast U.S. to various parts of the U.S. Data are based on the U.S. LCI database.

5.13.6 Installation

PET carpet is installed using either standard latex glue or a low-VOC latex glue. The amount of adhesive used for the broadloom carpet is 0.63 kg/m^2 (0.129 lb/ft^2). Water-based adhesive formulations today are used far more often than conventional solvent-based adhesives which are known to emit higher levels of VOCs. Because of the broad selection of adhesives on the market and, thus, varying levels of VOCs that could be emitted after installation, the VOC emissions limits for sealants and adhesives, set out in SCAQMD (2011), have been used for the baseline carpet adhesive used in BEES, or 50 g/l (0.4 lb/gal) (Table 1 in SCAQMD (2011)). A “low-VOC” alternative is also offered for the BEES user; here, the adhesive is modeled as having a negligible VOC content. Adhesive off-gassing is included for each installation.

A rubber slab underlayment of 0.058 kg/ft^2 (0.128 lb/ft^2) is installed for this residential use (Table 28 in Mahalle (2011)). Since the rubber slab is considered a durable underlayment material, it is modeled as being replaced at every other new carpet installation.

Installation is primarily a manual process, so no energy use is modeled for the installation phase. Ecoinvent datasets were used to build the adhesive and for the rubber underlayment. Installation scrap varies depending on the job size. It is estimated that, on average, the scrap generated during installation is 4.5 % of the broadloom carpet. Installation waste is modeled as being transported 48 km (30 mi) by diesel truck and disposed of in a landfill. While some of the packaging waste at installation can be recycled, it is modeled as disposed of in a landfill. No glue is assumed to be wasted during installation.

5.13.7 Use and Maintenance

The service life of carpets varies depending on the amount of floor traffic and the type and frequency of maintenance. The level of maintenance is also dependent on the actual use and desired appearance of the floor. For BEES, the PET broadloom carpet is modeled as having a lifetime of 11 years. Replacement, including production of raw materials, manufacturing, transport to installation, etc., is included to account for the BEES flooring category’s operating lifetime of 60 years.

BEES includes cleaning and maintenance of the floor covering products during their useful lifetime. Because of maintenance programs developed by individual building owners and different manufacturers’ maintenance recommendations, there is no single maintenance regimen that is always followed. For example, frequency of deep cleaning and types and quantities of cleaning solutions will depend on the maintenance programs at the buildings. For BEES, cleaning and maintenance of the floor products is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published on-line; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular vacuuming of dirt and dust is a variable in BEES. The BEES user chooses the vacuuming frequency per week. The second part of cleaning is characterized as intermittent deeper cleaning – for carpets, this activity is extraction cleaning. This cleaning is a non-variable in BEES, although as acknowledged above, frequency may vary from building to building.

The carpet cleaning data are based on recommendations in the CRI Carpet Maintenance Guidelines for Commercial Applications for regular vacuuming and intermittent extraction cleaning (CRI, 2014). For BEES, the default number for residential carpets is once per week, averaging out the vacuuming needs of different traffic volumes (CRI (2014), p.18/30). Residential carpet is modeled as deep cleaned one time per year. Specific input and output data for vacuuming and deep cleaning come from a carpet cleaning and maintenance report prepared by the CCACTI. Table 5-58 through Table 5-60 provide the energy and other inputs and outputs used for carpet care. Data are from Table 6, Table 8, and Table 10 in Lu et al. (2008).

Table 5-58 Energy per Cleaning Event

<i>Electrical energy</i>	<i>MJ per sy</i>	<i>kWh per sf</i>
Vacuum	0.012	3.70E-04
Agitator (deep clean)	0.009	2.78E-04
Heat for 120F hot water (deep clean)	0.144	4.44E-03
Extractor (deep clean)	0.023	7.10E-04
Fan drying (deep clean)	0.087	2.69E-03

Table 5-59 Inputs per Cleaning Event

<i>Input</i>	<i>kg per sy</i>	<i>lb per sf</i>
Water	0.034	8.33E-03
Detergent	0.0012	2.94E-04
Hot water	1.44	0.353

Table 5-60 Outputs per Cleaning Event

<i>Output</i>	<i>kg per sy</i>	<i>lb per sf</i>
Solid waste from the vacuum	0.0064	1.57E-03
Water output after extraction	1.44	0.353
Detergent effluents	0.00085	2.08E-04
Solid waste from extraction	0.012	2.94E-03

5.13.8 End of Life

While there are recycling programs in place for carpets, the PET carpet is modeled as landfilled at end of life. End of life modeling includes transportation of the product, underlayment, and adhesive by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is based on ecoinvent end of life waste management process data.

5.14 Generic Terrazzo

The development of the generic terrazzo included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.14.1 Product Description

Terrazzo is a type of composition flooring. It consists of a mix of marble, granite, onyx, or glass chips in Portland cement, modified Portland cement, or a resinous (epoxy) matrix that is poured, cured, ground, and polished. The BEES model includes a terrazzo floor with epoxy resin, containing a high proportion of inorganic filler (principally marble dust and chips) and a pigment for aesthetic purposes. The materials are mixed and installed directly on site and, when dry, are polished. The functional unit used for BEES is 0.093 m² (1 ft²) of 9.5 mm (3/8 in) thick terrazzo, used over the building's operating lifetime of 60 years. This product can be used for the residential and commercial markets.

It should be noted that a portion of the information described herein is carried over from the previous BEES model and data.

5.14.2 Flow Diagram

The flow diagram in Figure 5-20 shows the major elements of this product as it is modeled for BEES.

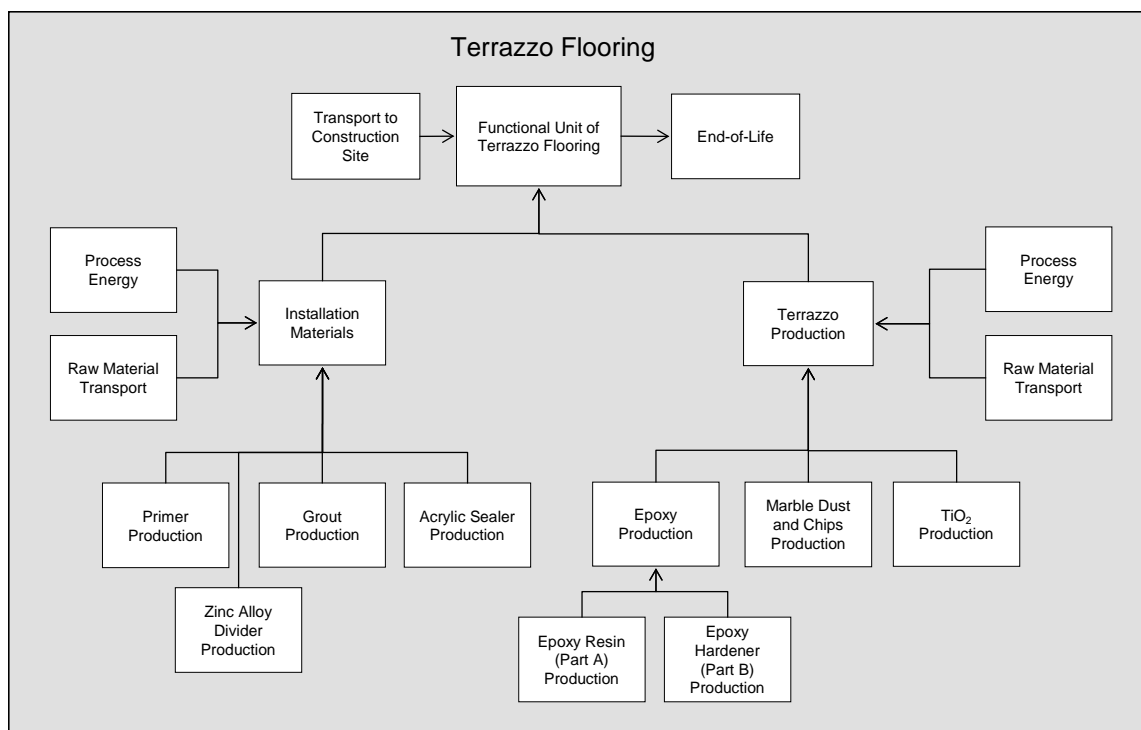


Figure 5-20 Terrazzo System Boundaries

5.14.3 Raw Materials

According to the National Terrazzo and Mosaic Association (NTMA), epoxy terrazzo ranges from 14.6 to 19.5 kg/m² (3 to 4 lb/ft²); the product modeled for BEES is 17 kg/m² (3.5 lb/ft²). Table 5-61 lists the constituents of epoxy terrazzo and their proportions.

Table 5-61 Terrazzo Carpet Constituents

<i>Terrazzo Constituents</i>	<i>Mass Fraction (%)</i>	<i>Mass (kg/m²)</i>	<i>Mass (lb/ft²)</i>
Marble dust and chips	75	12.8	2.63
Epoxy resin	24	4.1	0.84
Pigment (titanium dioxide)	1.0	0.17	0.04
Total	100	17.0	3.5

The term “marble” refers to all calcareous rocks capable of taking a polish (e.g., onyx, travertine, and some serpentine rocks). Marble is quarried, selected to avoid off-color or contaminated material, crushed, washed, and sized to yield marble chips for Terrazzo.⁵⁸ Note that because marble dust is assumed to be a co-product rather than a waste byproduct of marble production, a portion of the burdens of marble quarrying is allocated to marble dust production. Anecoinvent data set for basalt quarry was used as a proxy for marble quarrying.

⁵⁸ Phone conversation with NMTA representative, February 2006.

The epoxy resin consists of two parts: the epoxy resin and the epoxy hardener which initiates the curing. The epoxy resin within the terrazzo is mixed at a ratio of 5:1 resin to hardener. The epoxy resin is based on an ecoinvent data set; the hardener is built using ecoinvent data sets. Depending on customer selection, the terrazzo could have a pigment content of from 1 % to 15 %. The pigment is modeled as titanium dioxide, and ecoinvent is used.

The terrazzo constituents are assumed to be transported 402 km (250 mi) by diesel truck to the terrazzo supplier.

5.14.4 Manufacturing

Terrazzo is “manufactured” at the site of installation. The energy requirements for the on-site process include mixing the primer, mixing the terrazzo, grinding the surface (both before and after the application of grout), controlling the dust from grinding, mixing grout, and polishing the floor. The only energy data available are for mixing the terrazzo, which is assumed to require a 5.97 kW (8 hp) gasoline-powered mixer running for five minutes. Data in Table 5-62 are from U.S. LCI database.

Table 5-62 Energy Requirements for Terrazzo Manufacturing

<i>Energy Carrier</i>	<i>MJ/kg (Btu/lb)</i>
Gasoline	0.003 (1.17)

5.14.5 Transportation

Transportation distance of terrazzo by heavy-duty truck to the building site is modeled as 805 km (500 mi).

5.14.6 Installation

Installing epoxy terrazzo requires a sub-floor of a compatible type, such as cement board, exterior grade plywood, concrete block, concrete, or cement plaster. Most systems adhere to concrete slab subfloors that are level and surface-prepared. Zinc alloy divider strips, epoxy resin (A) and (B), and acrylic sealer are used during installation.

To prevent the terrazzo from cracking, dividers are placed precisely above any concrete joints. Back-to-back “L” strip dividers are recommended for construction joints. Standard dividers are a 9.5 mm (3/8 in) wide, 16-gauge white zinc alloy, and weigh approximately 0.177 kg/m (0.119 lb/ft). A 10 cm (4 in) thick concrete slab should have concrete joints at a maximum spacing of 3.7 m (12 ft); therefore, 29 m (96 ft) of divider are required for every 13.4 m² (144 ft²). The divider is modeled as aluminum (from U.S. LCI database) with zinc (from ecoinvent). Manufacturer specifications suggest bonding the divider strips to the floor using 100 % solid epoxy resin. The BEES model does not account for the bonding material as the amount is assumed to be negligible relative to the mass of the flooring.

Prior to applying the terrazzo mixture, the sub-floor must be primed. The primer is made by mixing the epoxy resin components at a lower ratio than that used for the epoxy terrazzo, and two parts epoxy resin to one part hardener has been assumed. Typical coverage is approximately 18.6 m² to 23.2 m² (200 ft² to 250 ft²) per blended gal of primer, or 0.18 L/m² (0.0044 gal/ft²). After the terrazzo mixture has been applied and the surface has been ground, the surface is grouted to fill and seal any voids. An epoxy grout is made by mixing the epoxy resin components in the same ratio used in the epoxy terrazzo. Typical coverage is approximately 46.5 m² to 65.0 m² (500 ft² to 700 ft²) per blended gal of grout, or 0.068 L/m² (0.0017 gal/ft²). The dust after grinding the surfaces (before and after application of grout) is collected and modeled as sent to and disposed of in a landfill.

After the floor has been grouted and polished, two coats of acrylic sealer are applied at an approximate thickness of one to two mils. Typical coverage for a single coat is approximately 74.3 m² to 92.9 m² (800 to 1000 ft²) per gal of sealer.⁵⁹ With a density of approximately 3.4 kg/gal, two coats come out to 0.08 kg/m² (0.017 lb/ft²). The impact of the acrylic sealer is based onecoinvent data.

5.14.7 Use and Maintenance

With proper maintenance and installation, a 60-year service life is given to the composite marble tile flooring as it is expected to last at least as long as the building itself.

BEES includes cleaning and maintenance of products during their useful lifetime. Because of differing manufacturers' maintenance recommendations, there is no single maintenance regimen that is followed. Cleaning equipment used to maintain floors will depend on the maintenance system selected by the building owner, often based on the desired overall appearance. Frequency of deep cleaning and refinishing or polishing, and types and quantities of these compounds will also depend on the maintenance programs developed by individual building owners. For BEES, cleaning and maintenance is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published online; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular cleaning of dirt and dust (i.e., by way of vacuuming (electrical requirements) or sweeping / dry mopping (non-electrical)) is a variable in BEES. The BEES user chooses the method of regular cleaning along with the frequency per week. The default number for commercial applications is set at four, averaging out the cleaning needs of different volumes of traffic. For residential applications, the cleaning frequency is one time per week. Inputs and outputs per cleaning event of regular maintenance are shown in Table 5-63.

⁵⁹ Terroxy Acrylic Sealer Product Data Sheet, dated June 2015. Retrieved from <http://www.tmsupply.com/TMSupply/files/35/35285bb6-3bec-4d42-8c84-03daf456d1ae.pdf>.

Table 5-63 Inputs and Outputs per Regular Cleaning Event⁶⁰

<i>Vacuum choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Electricity	0.014 MJ	3.70E-04 kWh
Solid waste	0.0077 kg	0.0016 lb
<i>Sweep / dry mop choice</i>	<i>Per m²</i>	<i>Per ft²</i>
Solid waste	0.0077 kg	0.0016 lb

The solid waste is modeled as being transported by diesel truck and disposed of in a landfill. The second part of cleaning is characterized as intermittent deeper cleaning and other maintenance, and this activity is a non-variable in BEES, although as acknowledged above, it may vary from building to building. Table 5-64 and Table 5-65 present the intermittent cleaning and maintenance schedules and inputs for these flooring products.

Table 5-64 Terrazzo Cleaning Processes and Frequency^{61,62}

<i>Cleaning Process</i>	<i>Frequency-Commercial</i>	<i>Frequency-Residential</i>	<i>Resources Used</i>
Damp mop / neutral cleaner	1x per week	1x per 2 week	Hot water, neutral detergent
Deep cleaning (scrub)	1x per month	1x per 2 month	Electricity, neutral detergent, water
Polish	6x per year	1x per year	Floor finish, electricity

Table 5-65 Terrazzo Intermittent Cleaning Inputs per Year⁶³

<i>Cleaning Input</i>	<i>Commercial</i>		<i>Residential</i>	
	<i>Per m²</i>	<i>Per ft²</i>	<i>Per m²</i>	<i>Per ft²</i>
Detergent (ml)	124	11.5	62	5.76
Electricity (kWh)	0.033	0.003	0.013	0.001
Polish/finish (liter)	0.10	0.009	0.017	0.002
Water (liter)	6.2	0.58	3.1	0.29

5.14.8 End of Life

Terrazzo is modeled as landfilled at end of life. End of life modeling includes transportation of the terrazzo and installation materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in

⁶⁰ Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

⁶¹ Terrazzo is assumed to have similar maintenance requirements as linoleum floor products, so maintenance was modeled the same as linoleum in BEES.

⁶² Commercial cleaning frequency was modeled based on Armstrong Linoleum EPD (2014), Table 5. Residential frequency: assumed.

⁶³ No material or energy usage quantities were provided in the Armstrong Linoleum EPD (2014), so inputs were modeled using adjusted data from Table 2 in (RFCI, 2013a).

a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based on ecoinvent end of life waste management process data.

5.15 Generic Wool Carpet

The development of the generic wool carpet included in BEES Online 2.0 uses the underlying data and methodology as described in this section.

5.15.1 Product Description

For the BEES analysis, a broadloom carpet and modular carpet tile with wool face fiber weight of 1.36 kg/m² (40 oz/yd²) have been included. The functional unit used for this BEES category is a flooring covering of 0.09 m² (1 ft²) used over the building's operating lifetime of 60 years. The mass for the 0.09 m² (1 ft²) wool broadloom carpet in BEES is 2.8 kg/m² (0.57 lb/ft²) and the mass for 0.09 m² (1 ft²) of wool carpet tile is 5.6 kg/m² (1.15 lb/ft²). The broadloom carpet can be used in both residential and commercial applications. The modular carpet is applicable for commercial use in BEES.

5.15.2 Flow Diagram

The flow diagrams in Figure 5-21 and Figure 5-22 show the major elements of the production of this product, as it is currently modeled for BEES.

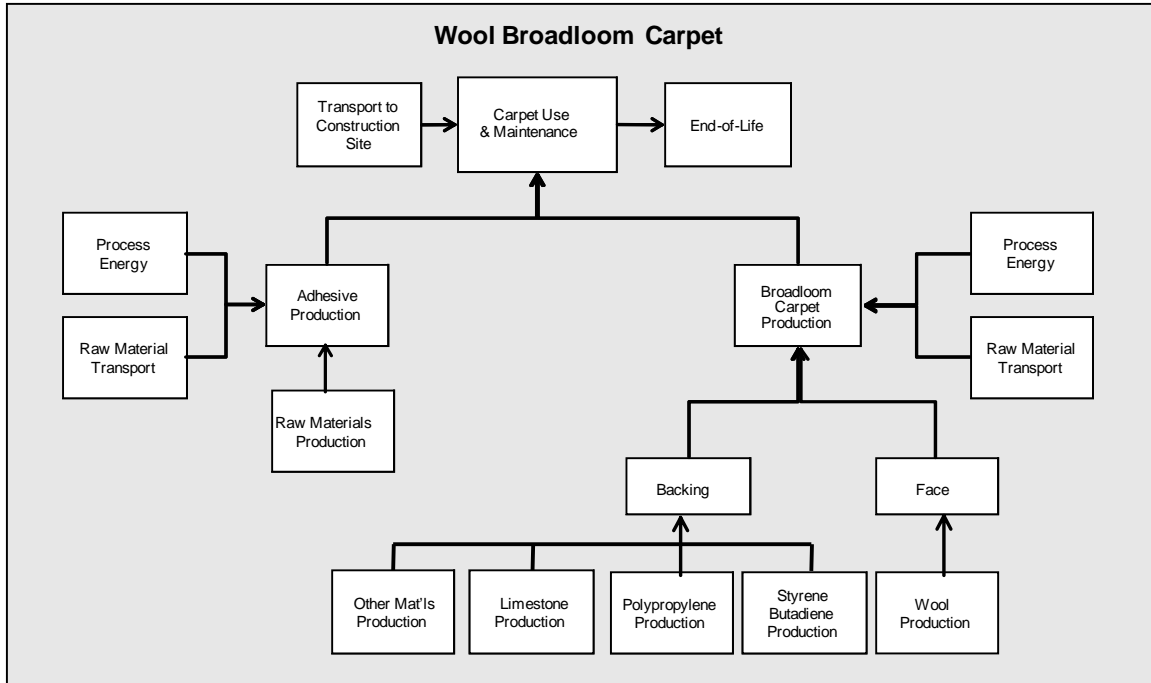


Figure 5-21 Wool Broadloom Carpet System Boundaries

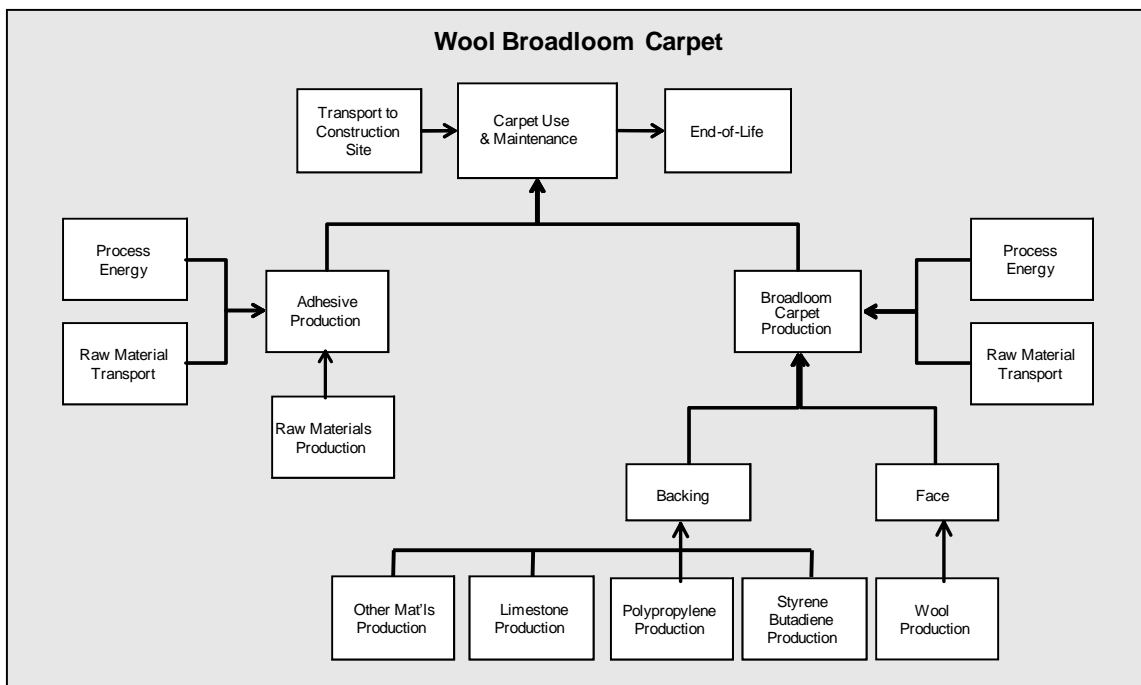


Figure 5-22 Wool Carpet Tile System Boundaries

5.15.3 Raw Materials

The composition of broadloom carpet and carpet tiles differs significantly. Broadloom carpeting consists of the face and a mix of materials that make up the backing of the product. Modular carpet consists of the face and a mix of materials making up several functional layers of the product; specifications are provided in Table 5-66.

Table 5-66 Wool Carpet Constituents

Constituent	Material	g/m ²	oz/yd ²
Broadloom			
Face Fiber	Wool	1 356	40
Backing	Limestone	610	18
	Polypropylene (PP)	237	7
	Styrene butadiene (SB) latex	373	11
	Aluminum trihydrate	203	6
	Stainblocker	0.3	0.01
	Other additives	1.7	0.05
Total		2 783	82
Tile			
Face Fiber	Wool	1 356	40
Primary backing	Polyester (PET) woven	119	3.5
Pre coat	EVA latex	288	8.5
	Limestone	85	2.5
	Aluminum hydroxide	475	14
	Other additives	17	0.5
	Vinyl Backing	Polyvinyl chloride (PVC) resin	610
	Limestone	1831	54
	DOTP plasticizer (that has replaced DINP)	644	19.0
	Lime	34	1.0
	Other additives	85	2.5
	Fiberglass	Fiberglass	68
Total		5 612	165.5

Data for the materials in the wool face carpets are generally either U.S. LCI database or ecoinvent data sets. PP, PET, and PVC resins come from the U.S. LCI database. An acrylonitrile-butadiene-styrene copolymer resin data set, also from U.S. LCI database, was used as a proxy for the SB latex. Ecoinvent datasets, customized to U.S. energy, were used for the remainder of the materials, with the exception of the plasticizer, which is a confidential data set based on one U.S. manufacturer’s late 2010’s primary data. Also, aluminum hydroxide (ecoinvent) was used as a proxy for aluminum trihydrate. No data were available to include the stainblocker or other additives in the products, but these make up 0.1 % and 1.6 % of the broadloom and tile carpet bills of materials, respectively.

Data for wool comes from ecoinvent’s data sets related to sheep husbandry on pasture land and for wool cleaning and preparation for fiber production. Sheep-related inputs include but are not limited to fertilizer, feed production, and irrigation; wool impacts are based on an ecoinvent-calculated allocation of 22 % (by economic value) of the total sheep. The wool preparation and fiber data were taken from the previous version of BEES. Raw wool is greasy and carries debris that needs to be washed off in a process called “scouring.” The amount of washed wool per kg of raw wool is 80 %, as shown in Table 5-67 along with mass fractions for other raw wool constituents reported by the Wool Research Organization of New Zealand (WRONZ).

Table 5-67 Raw Wool Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Clean fiber (ready to be carded and spun)	80
Grease	6
Suint salts	6
Dirt	8

Grease is recovered at an average rate of 40 %, and the non-recovered grease exits the system (e.g., as sludge from water effluent treatment). The scoured fiber is then dried, carded, and spun. Table 5-68 lists the main inflows and outflows for the production of wool yarn from raw wool as reported by WRONZ.

Table 5-68 Wool Yarn Production Requirements

<i>Flow</i>	<i>Amount per kg (per lb) wool yarn</i>
Input	
Natural Gas	5.375 MJ (3.29 kWh)
Electricity	0.70 MJ (0.43 kWh)
Lubricant	0.063 kg (0.31 lb)
Water	37.5 l (21.79 gal)
Output	
Wool yarn ⁶⁴	1 kg (4.85 lb)
Water emissions due to scouring:	
Biochemical Oxygen Demand	4.125 g (0.02 lb)
Chemical Oxygen Demand	11.625 g (0.06 lb)

Most of the required energy is used at the scouring step. Since grease is a co-product of the scouring process, a mass-based allocation is used to determine how much of the energy entering this process is due exclusively to the production of washed wool. One-fourth of the required energy is used for drying. Lubricant is added for blending, carding, and spinning, and some lubricant is incorporated into the wool. Approximately 6 % of the wool is lost during the blending, carding, and spinning processes of yarn production; this waste is accounted for in the BEES data for the manufacturing lifecycle stage.

Truck transport of raw materials to the manufacturing plant is assumed to be 402 km (500 mi) on average by truck. Wool, most of which is assumed to come from New Zealand, is transported 14 688 km (9129 mi). Data are based on the U.S. LCI database.

Production of product packaging components, as well as their transport to carpet manufacturing facilities, has been included in the BEES model. Broadloom carpet is modeled as rolled onto a recycled content cardboard core and secured in plastic. Carpet tiles are modeled as packaged in recycled content cardboard boxes, stacked on wooden

⁶⁴ Accounts for the loss due to the 80 % mass fraction of clean fiber in raw wool.

pallets, and secured with stretch wrap. These data are based on the measured quantities provided by Tandus Centiva for their roll and modular products in BEES.

5.15.4 Manufacturing

Wool yarn production into carpet fiber requires additional steps including bleaching, dyeing, and finishing. The inputs to the bleaching process, provided in Table 5-69, are based on a Best Available Techniques document for the textile industry (European Commission (2003), p.135). No energy data are available for bleaching, and information for dyeing and finishing is not sufficient to permit inclusion in the BEES model.

Table 5-69 Wool Yarn Bleaching Inputs

<i>Input</i>	<i>kg/kg (= lb/lb) Wool Yarn</i>
Stabilizer	0.030
Sodium Tri-Polyphosphate	0.015
Hydrogen Peroxide (35%)	0.200
Formic Acid (85%)	0.002
Sodium Hydrosulphite	0.008

For both wool carpet types, the wool must be “tufted” to produce the carpet face. The face yarn is attached, using a primary coating and tufting needles, to the carpet backing. The energy requirements for this process step are provided in Table 5-70.

Table 5-70 Energy Requirements for Wool Carpet Tufting

<i>Energy Carrier</i>	<i>MJ/m² (kWh/ft²)</i>
Electricity	1.79 (0.05)
Natural Gas (industrial boiler)	8.13 (0.21)
Total	9.92 (0.26)

Emissions associated with the manufacturing process arise from the production of electricity and the combustion of natural gas, and are based on the U.S. LCI Database.

Approximately 0.01 kg (0.02 lb) of waste is generated from the production of 0.09 m² (1 ft²) of wool broadloom and tile carpeting. The waste is assumed to be disposed of in a landfill; transportation to the landfill by diesel truck and management of the waste in a landfill is accounted for.

5.15.5 Transportation

Transportation of the products to the building site is done by heavy-duty truck, and 805 km (1500 mi) was modeled as the default distance, assuming the majority of carpets are being transported from the Southeast U.S. to various parts of the U.S. Data are based on the U.S. LCI database.

5.15.6 Installation

Wool broadloom carpets and carpet tiles are installed using either standard latex glue or a low-VOC latex glue. For the tile, typical glue application is 0.129 kg/m² (0.026 lb/ft²) of installed tile. For the broadloom carpet, 0.63 kg/m² (0.129 lb/ft²) is applied to the product. Water-based adhesive formulations today are used far more often than conventional solvent-based adhesives which are known to emit higher levels of VOCs. Because of the broad selection of adhesives on the market and, thus, varying levels of VOCs that could be emitted after installation, the VOC emissions limits for sealants and adhesives, set out in SCAQMD (2011), have been used for the baseline carpet adhesive used in BEES, or 50 g/l (0.4 lb/gal) (Table 1 in SCAQMD (2011)). A “low-VOC” alternative is also offered for the BEES user; here, the adhesive is modeled as having a negligible VOC content. Adhesive off-gassing is included for each installation.

For the broadloom carpet used for residential applications, a rubber slab underlayment of 0.058 kg/ft² (0.128 lb/ft²) is installed (Table 28 in Mahalle (2011)). Since the rubber slab is considered a durable underlayment material, it is modeled as being replaced at every other new carpet installation.

Installation is primarily a manual process, so no energy use is modeled for the installation phase. Ecoinvent datasets were used to build the adhesive and for the rubber underlayment. Installation scrap varies depending on the job size. It is estimated that, on average, the scrap generated during installation is 4.5% of the broadloom carpet and 2 % of the carpet tile. Installation waste is modeled as being transported 48 km (30 mi) by diesel truck and disposed of in a landfill. While some of the packaging waste at installation can be recycled, it is modeled as being disposed of in a landfill. No glue is assumed to be wasted during the installation process.

5.15.7 Use and Maintenance

The service life of carpets varies depending on the amount of floor traffic and the type and frequency of maintenance. The level of maintenance is also dependent on the actual use and desired appearance of the floor. For BEES, the wool face carpets are modeled as having lifetimes of 25 years. Replacement, including production of raw materials, manufacturing, transport to installation, etc., is included to account for the BEES flooring category’s operating lifetime of 60 years.

BEES includes cleaning and maintenance of the floor covering products during their useful lifetime. Because of maintenance programs developed by individual building owners and different manufacturers’ maintenance recommendations, there is no single maintenance regimen that is always followed. For example, frequency of deep cleaning and types and quantities of cleaning solutions will depend on the maintenance programs at the buildings. For BEES, cleaning and maintenance of the floor products is modeled based on industry-wide specifications or recommendations obtained from published EPDs; industry- or manufacturer-specific maintenance guides published on-line; or in some instances, general internet research on best maintenance practices.

Cleaning and maintenance in BEES is divided into two parts. The first, regular vacuuming of dirt and dust is a variable in BEES. The BEES user chooses the vacuuming frequency per week. The second part of cleaning is characterized as intermittent deeper cleaning – for carpets, this activity is extraction cleaning. This deep cleaning is a non-variable in BEES, although as acknowledged above, frequency may vary from building to building.

The carpet cleaning data are based on recommendations in the Carpet and Rug Institute Carpet Maintenance Guidelines for Commercial Applications for regular vacuuming and intermittent extraction cleaning (CRI, 2014). For BEES, the default number for commercial carpets is 4 times per week, averaging out the vacuuming needs of different traffic volumes (CRI (2014), p.18/30). Residential vacuuming occurs one time per week (default). The commercial carpet is modeled as deep cleaned two times per year while the residential carpet is modeled as deep cleaned one time per year. Specific input and output data for vacuuming and deep cleaning come from a carpet cleaning and maintenance report prepared by the CCACTI. Table 5-71 through Table 5-73 provide the energy and other inputs and outputs used for carpet care. Data are from Table 6, Table 8, and Table 10 in Lu et al. (2008).

Table 5-71 Energy per Cleaning Event⁶⁵

<i>Electrical energy</i>	<i>MJ per sy</i>	<i>kWh per sf</i>
Vacuum	0.012	3.70E-04
Agitator (deep clean)	0.009	2.78E-04
Heat for 120F hot water (deep clean)	0.144	4.44E-03
Extractor (deep clean)	0.023	7.10E-04
Fan drying (deep clean)	0.087	2.69E-03

Table 5-72 Inputs per Cleaning Event

<i>Input</i>	<i>kg per sy</i>	<i>lb per sf</i>
Water	0.034	8.33E-03
Detergent	0.0012	2.94E-04
Hot water	1.44	0.353

Table 5-73 Outputs per Cleaning Event

<i>Output</i>	<i>kg per sy</i>	<i>lb per sf</i>
Solid waste from the vacuum	0.0064	1.57E-03
Water output after extraction	1.44	0.353
Detergent effluents	0.00085	2.08E-04
Solid waste from extraction	0.012	2.94E-03

5.15.8 End of Life

⁶⁵ Energy input and solid waste quantity based on Tables 8 and 10 of Lu et al. (2008). This is modeled on an assumption that carpet and other floors have attracted similar quantities of dirt and dust.

While there are recycling programs in place for carpets, the products are modeled as landfilled at end of life. End of life modeling includes transportation of the products, their underlayment (where applicable), and adhesive by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is based onecoinvent end of life waste management process data.

6 Exterior Wall Finish Category

The exterior wall finish category covers both residential and commercial products.

6.1 Exterior Wall Finish Types

There are a range of exterior wall finish types included in the exterior wall finish category as shown in Table 6-1.

Table 6-1 Exterior Wall Finish Types and Subtypes

Exterior Wall Finish	
Types	Subtypes
Siding	Vinyl
	Insulated Vinyl
	Cedar
	Aluminum
Stucco	N/A
Brick	N/A

6.2 Exterior Wall Finish Characteristics and Certifications

BEES Online 2.0 has added a feature to filter/restrict products selected based on product characteristics, such as fraction recycled materials, and product certifications, such as U.S. Department of Agriculture (USDA) Certified Biobased. The current list of characteristics and certifications provided in BEES 2.0 are listed in Table 6-2.

Table 6-2 Exterior Wall Finish Characteristics and Certifications

Characteristics and Certifications	
Federal Agency Certifications	None
Standard Certification	None
NGO Certification	None
Characteristics	25 % Recycled Content
	35 % Recycled Content
	50 % Recycled Content
	75 % Recycled Content

6.3 Exterior Wall Finish Installation, Service Life, and Use Phase

To evaluate the life cycle impacts of exterior wall finishes, it is necessary to consider the installation and use phase impacts, both of which could vary depending on decisions outside the product manufacturer’s control. It is assumed there are no use phase impacts while installation impacts are incorporated into the products embodied impacts. The

default assumed service life is defined for each BEES product in its associated documentation.

6.4 Generic Stucco Cladding

Stucco is typically a mixture of sand, cement, and lime applied to masonry or framed walls. Stucco is desired for aesthetics, integral colors, fire ratings, high abuse resistance, and low maintenance. BEES covers two types of stucco. Traditional three-coat stucco is made up of two base coats and a finish coat of Portland cement and/or masonry cement. One coat stucco, an alternative to traditional stucco, is made up of one base coat and one finish coat of plaster cement, using almost half the cement of three coat, and a rigid foam sheathing layer.

6.4.1 Product Description

The BEES model assumes a functional unit of 0.09 m² (1 ft²) of stucco applied to a frame construction, i.e., stucco applied over expanded metal lath or woven wire, for 60 years. Three coat stucco is used for residential and commercial applications, while one-coat may be used in residential and light commercial applications.⁶⁶

In BEES, three-coat stucco totals 2.22 cm (7/8 in) in thickness. Coats one and two are each nominally 0.95 cm (3/8 in) thick and the finish coat is 0.32 cm (1/8 in) thick. The base and finish coat densities for Portland cement and masonry cement stuccos are shown in Table 6-3. Since no specific data were available on overall North America market share of Portland cement and masonry cement stucco, life cycle data for the two cement types were averaged (50-50) for use in the BEES model.

One-coat stucco in BEES is modeled as having one base coat of 0.95 cm (3/8 in) thick and a finish coat of 0.32 cm (1/8 in) (ORNL, 2012). The rigid foam insulation is 2.54 cm (1 in) expanded polystyrene (EPS). While three-coat stucco preparation is prescriptive (i.e., specified amounts of Portland cement and/or masonry cement), one coat, not currently written into building code or explicitly covered by ASTM standards, must use formulation(s) that adhere to the performance requirements set out in the code bodies.

Table 6-3 Density of Stucco by Plaster Cement Type

<i>Type of Stucco</i>	<i>Density kg/m³ (lb/ft³)</i>
Portland Cement Base Coat (Type C plaster)	1830 (114)
Portland Cement Finish Coat (Type F plaster)	1971 (123)
Masonry Cement Base Coat (Type MS plaster)	1907 (119)
Masonry Cement Finish Coat (Type FMS plaster)	2175 (136)

⁶⁶ Code prohibits one coat on Type I and Type II buildings. For BEES, this is designated only as a residential product.

6.4.2 Flow Diagram

The flow diagrams in Figure 6-1 through Figure 6-3 show the major elements of Portland cement three-coat stucco, masonry cement three-coat stucco, and one-coat stucco exterior sidings.

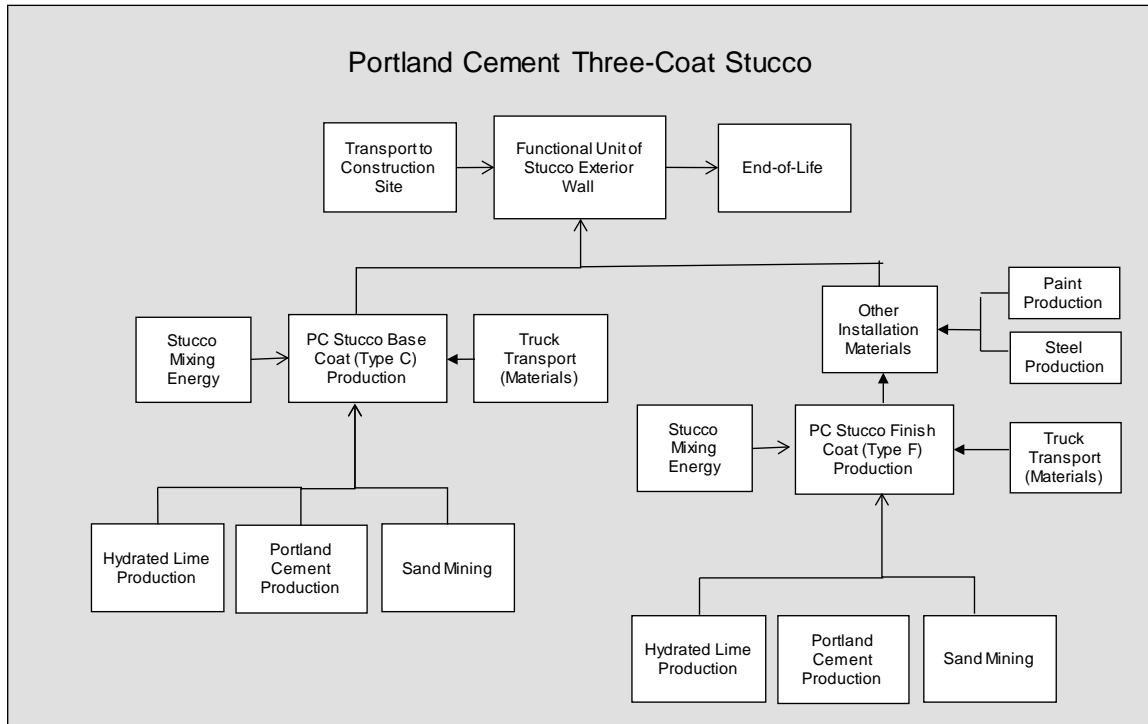


Figure 6-1 Portland Cement Three-Coat Stucco System Boundaries

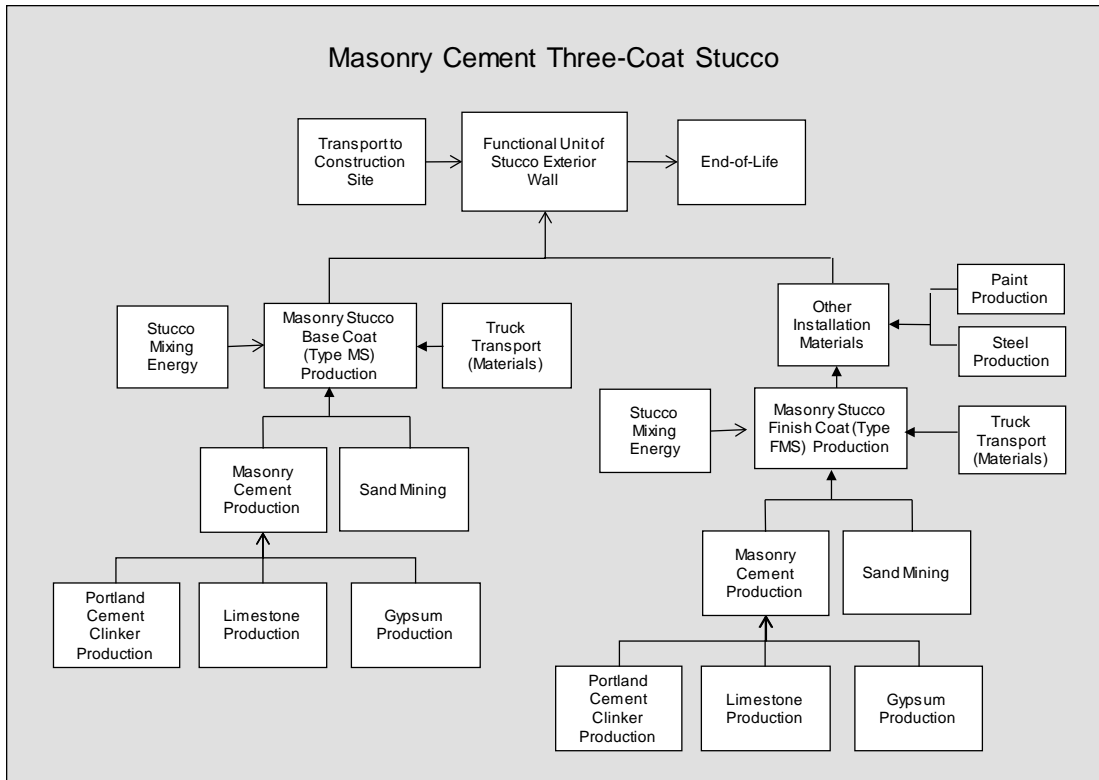


Figure 6-2 Masonry Cement Three-Coat Stucco System Boundaries

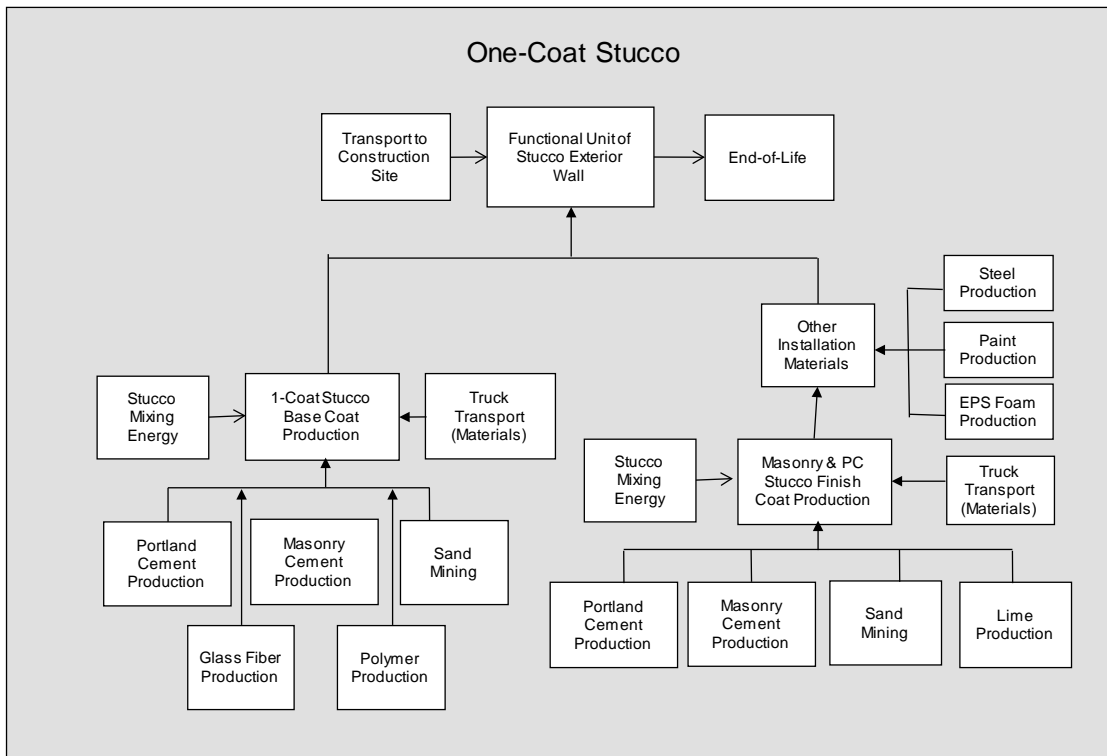


Figure 6-3 One-Coat Stucco System Boundaries

6.4.3 Raw Materials

The material compositions of three coat stucco using Portland cement and masonry cement base coat and finish coats are shown in Table 6-4.⁶⁷

Table 6-4 Three Coat Stucco Constituents

<i>Constituent</i>	<i>Cementitious Materials (volume fraction)</i>			<i>Sand (volume fraction of cementitious material)</i>
	<i>Portland Cement</i>	<i>Masonry Cement</i>	<i>Lime</i>	
Base Coat C	1		1.125	3.25
Finish Coat F	1		1.125	3
Base Coat MS		1		3.25
Finish Coat FMS		1		3

The base coat cement for one coat stucco is a proprietary blend of sand, cement, lime, fiber for reinforcement, and additives. The constituents and their mass fractions vary across manufacturers, but a generic formulation is presented in Table 6-5.

Table 6-5 One Coat Stucco Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Sand	70.0
Cement	25.0
Glass fiber	2.0
Polymers	3.0

The cement is modeled as an average of masonry and Portland cements, described below. The polymer is assumed to be acrylic polymer. One coat stucco's top coat is identical to the top coat used for three coat stucco (both in composition and thickness).

Portland and Masonry Cement Production: The Portland cement data come from Portland Cement Association's (PCA's) U.S. industry-average data (PCA, 2016a). The raw material use for masonry cement is based on Type N masonry cement, and its constituents are shown in Table 6-6 (PCA, 2016b).

Table 6-6 Masonry Cement Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Portland cement clinker	57.5 %
Limestone	36.1 %
Gypsum	4.9 %
Dust (e.g., bypass dust)	1.1 %
Other inputs	0.5 %
Total	100.0 %

⁶⁷ Based on ASTM Specification C926-94.

The contents of materials above are based on ecoinvent customized to U.S. conditions.

Other Three-Coat and One-Coat Stucco Constituents: Data for the lime, sand, acrylic binder, and glass fiber come from the ecoinvent database customized to U.S. conditions.

Transportation of raw materials: Many of the raw materials used for stucco are locally sourced; an assumed 90 % of materials is modeled as being transported 322 km (200 mi) by truck. The remaining materials are transported an average of 3219 km (2 000 mi), assumed to be by rail.

6.4.4 Manufacturing

Stucco is “manufactured” and assembled at the point of installation. See the section below on “Installation.”

6.4.5 Transportation

The stucco raw materials are transported to the building site via diesel truck an average distance of 805 km (500 mi). The BEES user can change this default distance within BEES.

6.4.6 Installation

Stucco is commonly delivered to a job site in one-cubic yard bags (approximately 42.6 kg (94 lb)). Gasoline, diesel, or electric mixers can prepare up to thirty bags per day of stucco. Large pumps may also be used at job sites; these can pump approximately 200 bags per day, dramatically increasing production time and efficiency. According to Stucco Manufacturers Association (SMA), pumps account for approximately 75 % of the bagged plastic cement used, and BEES models this preparation method. The pumping motor is a four-cylinder pump which uses about 37.8 l to 45.4 l (10 gal to 12 gal) gasoline or diesel fuel per day, amounting to 2.2 l (0.585 gal) of fuel per 454 kg (1000 lb) stucco prepared.

Stucco may be installed onto expanded metal lath or woven wire, a lighter steel product, on wood and steel frame materials. While metal lath can be used for all the applications, nowadays it is most commonly used for three coat commercial applications. It is typically 0.15 kg (0.33 lb) per ft² of wall area. Woven wire is primarily used for residential applications. For three coat stucco, woven wire is modeled at approximately 0.113 kg (0.25 lb) per 0.09 m² (1 ft²) of wall area. For one coat stucco, a lighter gauge woven wire is used with the foam sheathing – approximately 0.057 kg (0.125 lb) woven wire per 0.09 m² (1 ft²) of wall area is used. For all of these materials, the typical recycled content in steel used for building materials is used.

EPS rigid foam sheathing is included in the one coat stucco system boundaries. One-inch EPS foam board is modeled at 0.057 kg (0.125 lb). Data for EPS resin blown into foam boards is based on industry average primary data and comes from the U.S. LCI database.

The foam is typically grooved on the back side to allow for drainage. While the EPS foam provides some insulating benefits, building code still requires additional insulation (consistent with other products in this category, this extra insulation is not included in the analysis of the stucco). Building code does not require sheathing for three coat stucco even though it is common. To be consistent with other products in BEES, sheathing is not included in the three coat stucco system boundaries for BEES. For both products, weather resistive barriers and other ancillary materials that may be required to complete the exterior wall system are not included in the system boundaries for BEES exterior wall finishes. A small amount of waste, approximately 1 %, is assumed to be generated during the installation process. Scrap EPS generated at installation is assumed to be 2 % of the total.

Stucco buildings are assumed to be painted. After installation, the siding is modeled as painted with two coats of acrylic paint. Due to lack of data for exterior acrylic paint, it is modeled as a solvent based paint modeled for BEES in the amount of 0.0175 kg (0.0079 lb) per 0.09 m² (1 ft²).

6.4.7 Use

The stucco siding is modeled as being repainted with one coat of paint every fifteen years, for a total of three additional paint coatings over the course of 60 years. A properly installed stucco exterior will have a useful life of 100 years. Maintenance can vary greatly with weather conditions but is usually minimal. Crack repairs are done manually. Besides painting, other maintenance is not included within the boundaries of the BEES model.

6.4.8 End of Life

At end of life of the building, it is assumed that stucco and lath or woven wire are sent to a construction & demolition landfill. End of life modeling includes transportation of these materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data.

6.5 Dryvit Systems Cladding Products

In 1969, Dryvit Systems, Incorporated, currently owned by RPM International Inc. of Medina, OH, introduced North America to its exterior wall cladding system with insulation installed as part of the outside wall. Since that time, Dryvit's Exterior Insulation and Finish Systems (EIFS) have been used on commercial and residential buildings in the United States.

Dryvit operates four manufacturing plants in the U.S., including one at its headquarters in West Warwick, RI, and has subsidiary operations in Canada, Poland, and China. The data

for the Outsulation systems are based on the West Warwick, RI facility while the data for the Canada systems are based on the Stouffville, Ontario, Canada facility.

6.5.1 Product Description

Siding is generally specified in terms of ‘squares’ of siding, or 9.29 m² (100 ft²) of siding. For BEES, the functional unit is 0.09 m² (1 ft²) of siding used in a building for 60 years. All the Dryvit EIFS cladding systems are installed onto sheathing and are evaluated in BEES with the other exterior wall covering products on the functional basis of one square foot of exterior wall area covered. Even though these products are thermally efficient, a building still requires additional insulation to meet code. According to Dryvit, the EIFS systems provide a thermal resistance value of about R-6. Thermal performance differences among exterior wall finish alternatives are not accounted for in BEES but should be considered when interpreting BEES results.

Four of the most widely used Dryvit EIFS cladding systems are evaluated in BEES: Outsulation and Outsulation Plus for the U.S. market, and Outsulation Plus and Outsulation MD, produced by Dryvit Systems Canada for the Canada market. The Outsulation cladding systems are comprised of an EPS insulation board, a fiberglass mesh which is used for reinforcement, a polymer-modified cement-based adhesive/basecoat, and a polymer-based textured finish used as a top coat. Outsulation Plus has an added layer of air and moisture barrier which is intended to protect the wall from accidental moisture and provide better insulation by stopping air infiltration. All of these cladding systems can be installed in new and existing buildings.

6.5.2 Flow Diagram

The flow diagrams in Figure 6-4 and Figure 6-5 show the major elements of the production of these products as they are currently modeled for BEES.

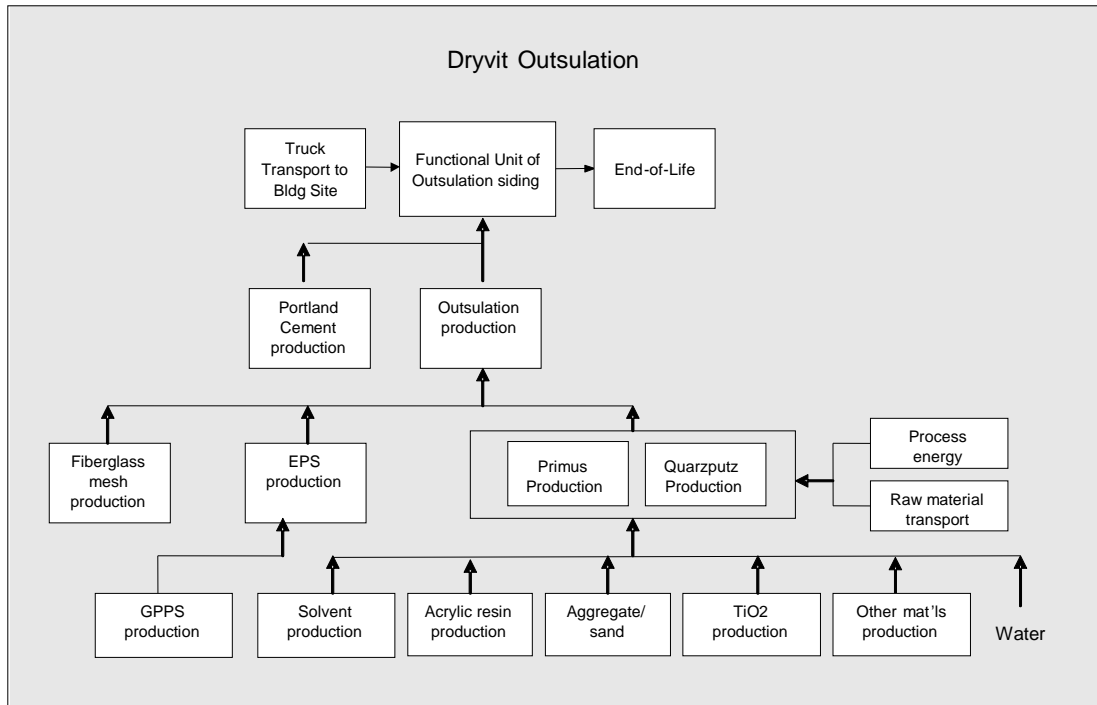


Figure 6-4 Dryfit Outsulation System Boundaries

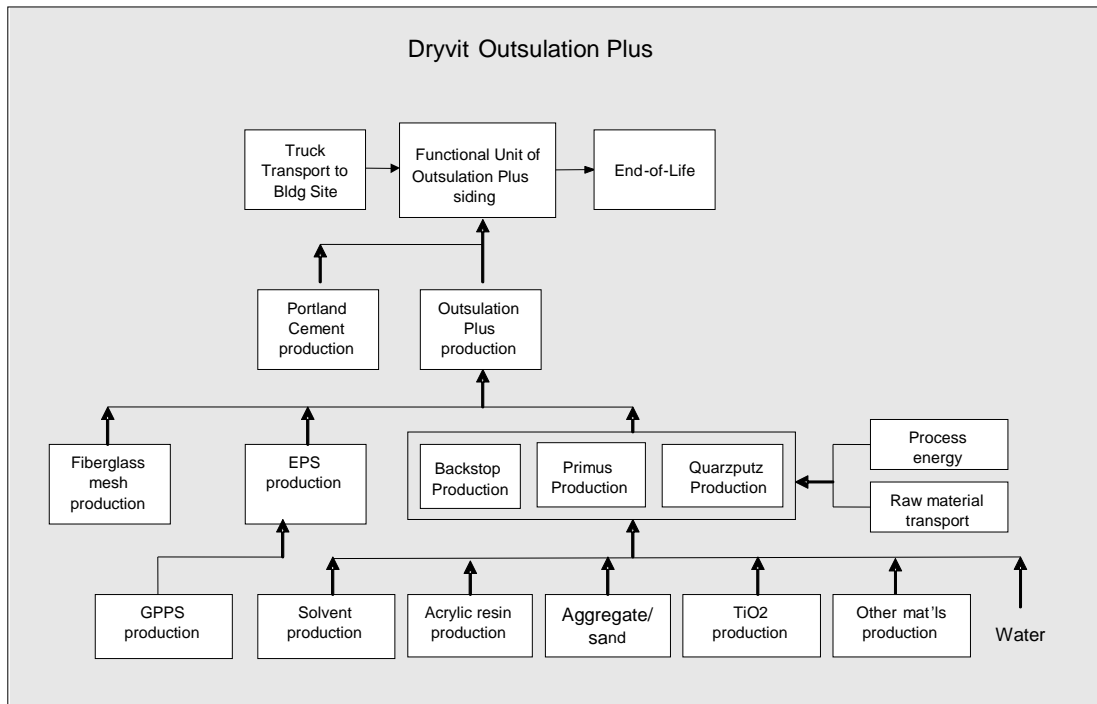


Figure 6-5 Dryfit Outsulation System Boundaries

6.5.3 Raw Materials

Product Constituents: Outsulation and Outsulation Plus for U.S. and Canada.

Outsulation’s basecoat, the textured finish top coat, and the barrier layer offered as part of Outsulation Plus are mixed and packaged at Dryvit’s facilities. The Outsulation layers modeled for BEES are presented in Table 6-7 along with a listing of their materials:

Table 6-7 Outsulation and Outsulation Plus Product Constituents

<i>Constituent</i>	<i>Adhesive / Basecoat (Primus)</i>	<i>Topcoat (Quarzputz)</i>	<i>Barrier (Backstop)</i>
Solvent	Yes	Yes	Yes
Resins	Yes	Yes	Yes
Aggregate	Yes	Yes	Yes
Fine filler		Yes	Yes
Titanium dioxide (TiO2) slurry		Yes	Yes
Other materials	Yes	Yes	Yes
Water	Yes	Yes	Yes

Product Constituents: Outsulation MD. The material constituents in Outsulation MD are mixed and packaged at Dryvit’s Ontario facility. The Outsulation MD layers modeled for BEES are presented in Table 6-8 along with a listing of their materials:

Table 6-8 Outsulation MD Product Constituents

<i>Constituent</i>	<i>Barrier (Backstop NT Texture)</i>	<i>Adhesive / Basecoat (Primus)</i>	<i>Flashing (AquaFlash)</i>	<i>Primer (Color Prime)</i>	<i>Topcoat (Sand-pebble)</i>
Solvent	Yes	Yes	Yes	Yes	Yes
Resins	Yes	Yes	Yes	Yes	Yes
Aggregate	Yes	Yes			Yes
Fine filler	Yes		Yes	Yes	Yes
TiO2 slurry	Yes		Yes	Yes	Yes
Water	Yes	Yes	Yes	Yes	Yes

Materials Data and Modeling. Ecoinvent data are used for the solvent (modeled as naphtha) and the fine filler, modeled as lime. The resin is modeled as an acrylic-based resin. Data for this resin, plus the aggregate and titanium dioxide slurry, are also based on ecoinvent. Water makes up much of these products: it is over 23 % of Quarzputz and Backstop, nearly 25 % of the Sandpebble topcoat, nearly 30 % of Primus, and 40 % Color Prime. Packaging for these products (18.9 l (5 gal) PP pails) is included in the model. Data for PP comes from the U.S. LCI database.

6.5.4 Manufacturing

Energy Requirements and Emissions. Energy use at the Dryvit plants is primarily electricity to blend the systems’ constituents in large vessels and package them into 18.9 l

(5 gal) pails. The quantity of electricity for each product produced in Rhode Island is provided in Table 6-9.

Table 6-9 Energy Requirements for Mixing Dryvit Outsulation and Outsulation Plus Materials

<i>Outsulation Products</i>	<i>kWh/lb</i>	<i>kWh/ ft²</i>
Primus	7.47 E-4	4.21 E-4
Quarzputz	6.26 E-4	3.45 E-4
Backstop	1.28 E-3	2.86 E-4
Total	2.65 E-3	1.05 E-3

No data were available to disaggregate electricity data for the Outsulation MD or Outsulation Plus constituents that are blended at the Ontario facility, so average blending energy there was used: 5.6 E-4 kWh per pound of product, or 7.1 E-4 kWh per square foot. Electricity production fuels and burdens come from the U.S. LCI database, using a Canada electricity grid mix. Any fine material particulates released during blending is captured by a dust collection system, so no particulates or other emissions are assumed to be released. No manufacturing waste is produced.

6.5.5 Transportation

Transportation distances of the product components were provided by both Dryvit plants. The distances to Warwick, RI range from 1770 km (1100 mi) for the fillers and 1086 km (675 mi) for the aggregate, down to 80 km (50 mi) for the solvent. For Outsulation MD and Outsulation Plus (Canada), all the materials except the aggregates are transported 26 km (16 mi) to Stouffville, Ontario. The aggregates are transported 363 km (227 mi) to Stouffville, Ontario. These materials are transported by diesel truck, as modeled in the U.S. LCI database.

The Outsulation U.S. products are modeled as being transported an average of 402 km (250 mi) by diesel truck to the building site. The Canadian products are transported by both diesel truck (average of 143 km, or 89 mi) and rail (average of 3444 km, or 2150 mi). When factoring the quantity transported by truck and rail (84 % and 16 %, respectively), the weighted average transported comes to 721 km (450 mi). These numbers are based on customer transportation records. EPS and fiberglass mesh are assumed to be transported 400 km (250 mi) by diesel truck to the building site.

6.5.6 Installation

Dryvit’s components described above, plus the EPS and fiberglass mesh, are installed together at the building site to produce the Outsulation, Outsulation Plus, and Outsulation MD products. These materials are specified in Table 6-10.

Table 6-10 Dryvit EIFS Constituents

<i>Constituent</i>	<i>Quantity per 9 m² (100 ft²) of EIFS</i>		
	<i>Outsulation</i>	<i>Outsulation Plus</i>	<i>Outsulation MD</i>
EPS	5.67 kg (12.5 lb)	5.67 kg (12.5 lb)	5.67 kg (12.5 lb)
Fiberglass Mesh	1.35 kg (2.98 lb)	1.35 kg (2.98 lb)	1.35 kg (2.98 lb)
Primus	25.0 kg (55.1 lb)	25.0 kg (55.1 lb)	25.0 kg (55.1 lb)
Quarzputz	24.43 kg (53.85 lb)	24.43 kg (53.85 lb)	
Backstop NT Texture		9.89 kg (21.8 lb)	9.89 kg (21.8 lb)
Flashing (AquaFlash)			0.302 kg (0.665 lb)
Primer (Color Prime)			1.5 kg (3.33 lb)
Topcoat (Sandpebble)			24.43 kg (53.85 lb)

EPS is produced by licensed EPS molders to a specification that has been established by Dryvit and ASTM International. Fiberglass mesh also is produced to Dryvit specification and ASTM International standard. The Dryvit basecoats, weather barriers, and finishes are used on the jobsite by trained plasterers. The process of applying EIFS cladding begins once the stud walls are constructed and sheathing is up. The EPS is applied to the sheathing with Primus as the adhesive and then again coated with Primus for a basecoat. In the field, Primus is mixed with equal amounts of cement. The fiberglass mesh is then embedded into the basecoat. After 24 hours of drying time, the textured finish, Quarzputz or Sandpebble, is placed as the top coat. Outsulation Plus installation includes the layer of Backstop for the added layer of air and moisture barrier. Outsulation MD includes a primer and a layer for flashing. Note that while sheathing, weather resistive barriers, and other ancillary materials are required to complete the exterior wall system, these materials are not included in the system boundaries for BEES exterior wall finishes.

Data for EPS resin and blowing agents for foam insulation is based on industry average primary data and comes from the U.S. LCI database. Fiberglass is based onecoinvent data. For the BEES system, these products are included with the raw material acquisition stage data since they are considered part of the main product. Portland cement (mixed with Primus) is included with the use stage of the product model. The Portland cement data come from PCA’s U.S. industry-average data (PCA, 2016a).

According to the manufacturer, installation waste can run from 1 % to 5 %; 2 % is modeled for BEES, and this waste is modeled as landfilled.

6.5.7 Use

Dryvit products are assumed to have useful lives of at least 60 years. Any maintenance or cleaning over the life, if needed, is done manually and with relatively few materials. Because maintenance can vary from owner to owner based on frequency and degree, representative data were neither available nor included in the model.

6.5.8 End of Life

At end of life of the building, it is assumed that these exterior siding products are sent to a construction & demolition landfill. End of life modeling includes transportation of these materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data.

6.6 CertainTeed Siding Products

CertainTeed Corporation manufactures building materials that include roofing, vinyl and fiber cement siding, trim, fence, railing, decking, foundations, insulation, gypsum, ceilings, and pipe products. CertainTeed has approximately 70 facilities throughout the United States and Canada.

6.6.1 Product Description

Five of CertainTeed's siding products are evaluated in BEES, with the functional unit of 0.09 m² (1 ft²) used over 60 years:

CertainTeed vinyl siding. CertainTeed's vinyl siding product in BEES is modeled as an average of its vinyl siding product lines manufactured at its Jackson, MI, and Hagerstown, MD, plants. Bills of materials and manufacturing data were collected from these two facilities and averaged on a weighted basis, based on vinyl siding output. This vinyl siding has a nominal thickness of 0.11 cm (0.044 in) and a mass ranging from 17.83 kg to 21.79 kg (39.4 lb to 48.2 lb) per 9.29 m² (100 ft²). Consistent with the generic vinyl siding product in BEES, it is typically installed with galvanized nail fasteners placed 41 cm (16 in) on center.

CertainTeed Recycled Content CedarBoards (D6). The CedarBoards Double 6" Clapboard product is a vinyl siding product with EPS foam backing for added insulation. The vinyl siding, containing both post-industrial and PC content PVC resin, has the semblance of a rough cedar finish, and has a nominal thickness of 0.11 cm (0.044 in). It is produced at CertainTeed's Jackson, MI, plant, and is sent to another facility to be laminated onto the insulated foam. Its mass ranges from 18.61 kg to 22.75 kg (41.0 lb to 50.2 lb) per 9.29 m² (100 ft²) and it is typically installed with galvanized nail fasteners placed 41 cm (16 in) on center. It has a thermal resistance value of R_{US}-2.9 according to thermal testing results by an independent testing company. Despite the added insulation, the building still requires base insulation. Thermal performance differences among exterior wall finish alternatives are not accounted for in BEES but should be considered when interpreting BEES results.

CertainTeed Cedar Impressions siding is a PP resin-based siding with the semblance and texture of cedar panels. With a mass ranging from 34.4 kg to 42.0 kg (75.6 lb to 92.4 lb) per 9.29 m² (100 ft²) and a thickness of 1.25 cm (0.10 in), Cedar Impressions is

manufactured at CertainTeed’s McPherson, KS, plant. It is typically installed with galvanized nail fasteners placed 26.7 cm (10.5 in) on center.

CertainTeed WeatherBoards siding with and without recycled content are two fiber cement-based siding products offered by CertainTeed. WeatherBoards are available in laps, panels, shingles, and individual shakes. The products evaluated in BEES, representing much of the volume of their fiber cement siding sold, are lap siding of 21.96 cm (8.25 in) wide and 0.79 cm (0.31 in) thick. Installed, they have a 17.8 cm (7.0 in) reveal with 3.18 cm (1.25 in) of overlap. WeatherBoards with recycled content have a density of 12.45 kg/m² (2.55 lb/ft²); installed density is 14.89 kg/m² (3.05 lb/ft²). Densities for WeatherBoards without recycled content are about 5 % higher: 13.07 kg/m² (2.68 lb/ft²) and 15.63 kg/m² (3.20 lb/ft²), respectively. WeatherBoards are typically installed with galvanized nail fasteners placed 41 cm (16 in) on center and the boards are painted. They are manufactured at CertainTeed’s Roaring River, NC, plant.

6.6.2 Flow Diagram

The flow diagrams in Figure 6-6 through Figure 6-10 show the major elements of the production of these products as they are currently modeled for BEES.

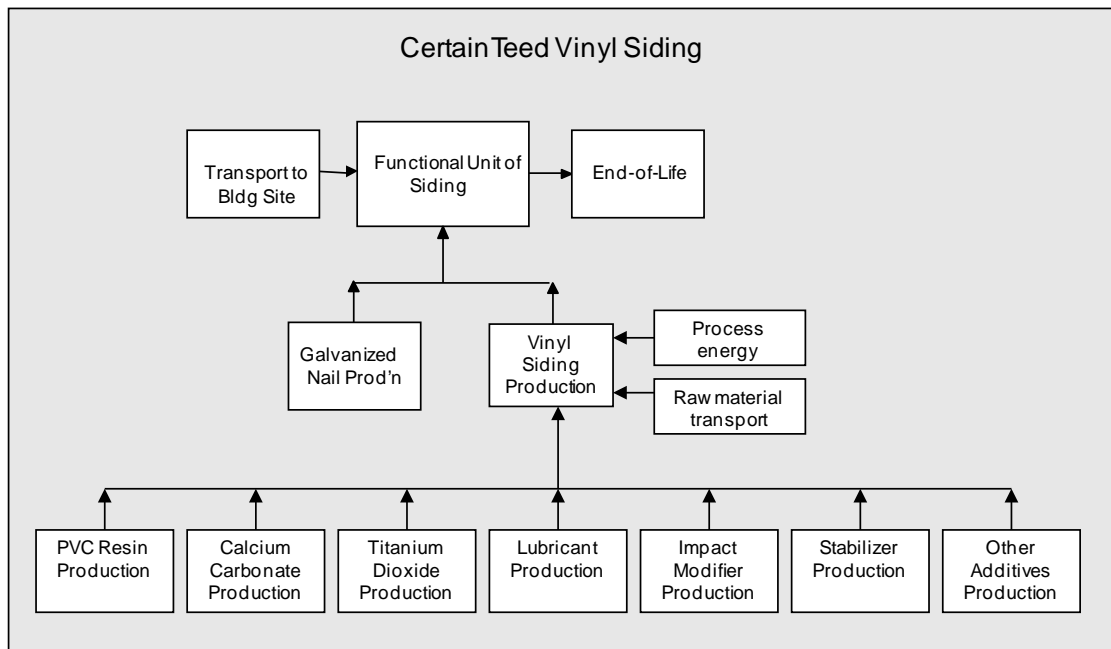


Figure 6-6 CertainTeed Vinyl Siding System Boundaries

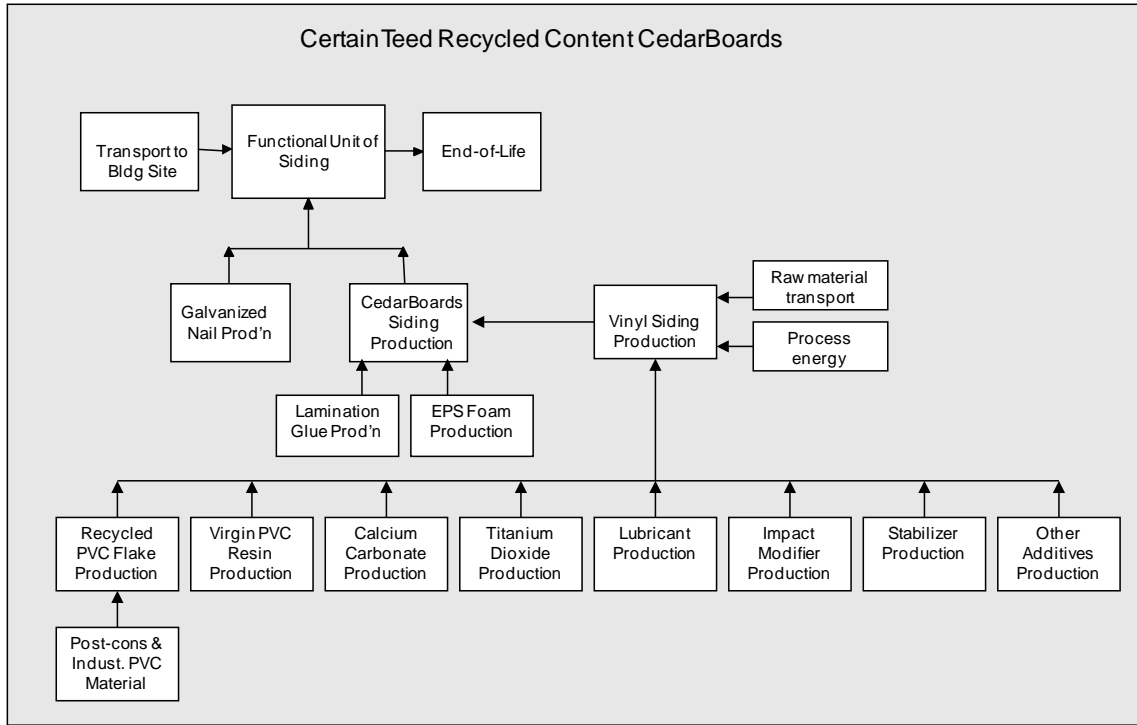


Figure 6-7 CertainTeed Recycled Content CedarBoards System Boundaries

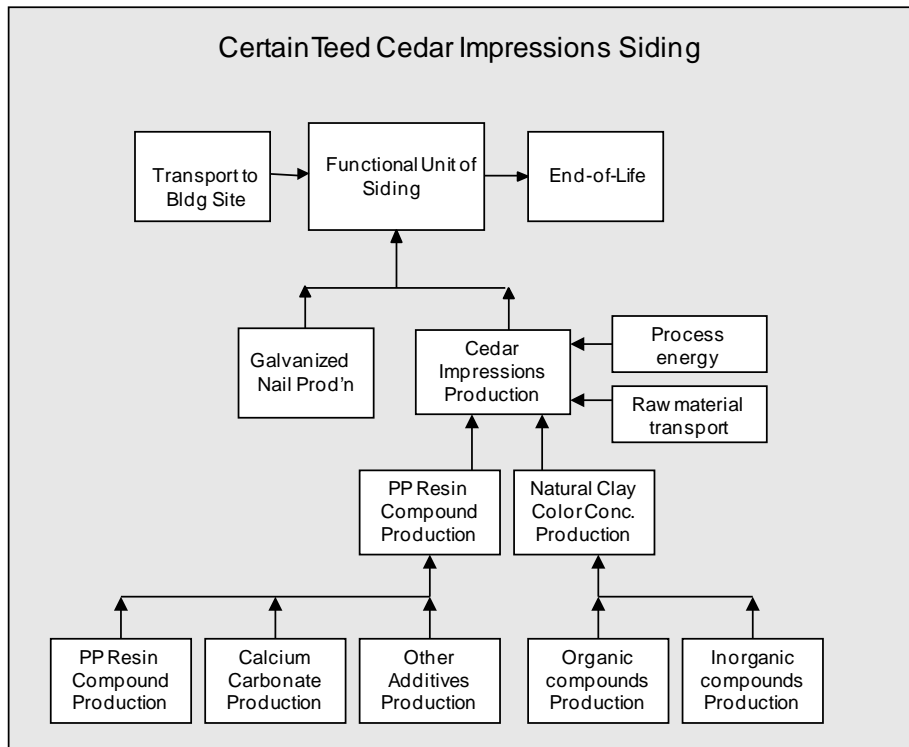


Figure 6-8 CertainTeed Cedar Impressions System Boundaries

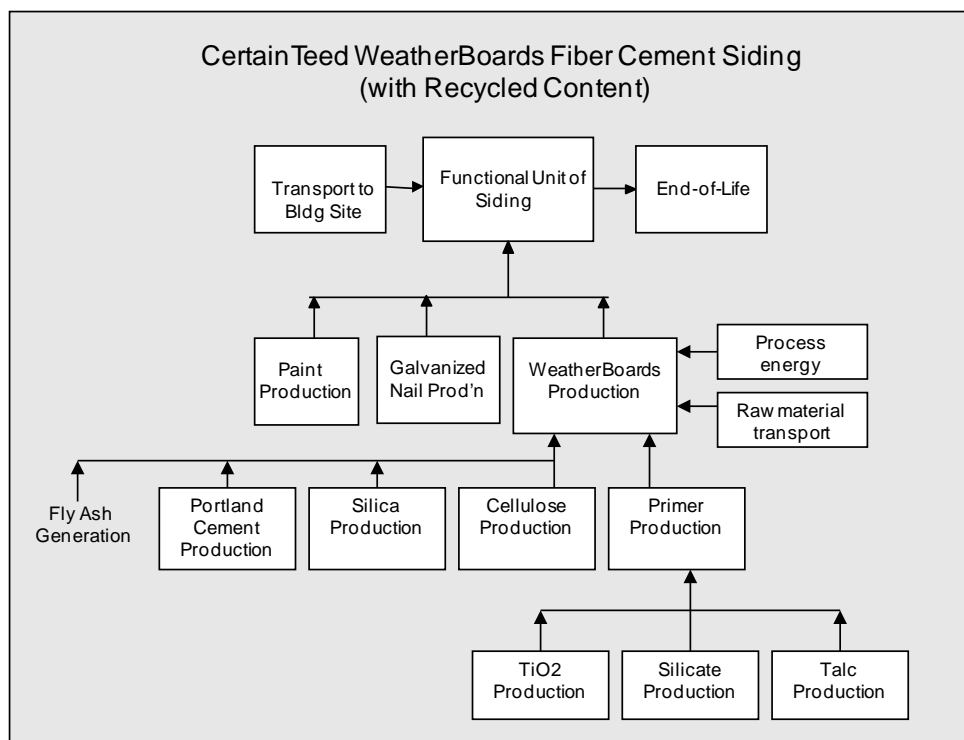


Figure 6-9 CertainTeed WeatherBoards (With Recycled Content) System Boundaries

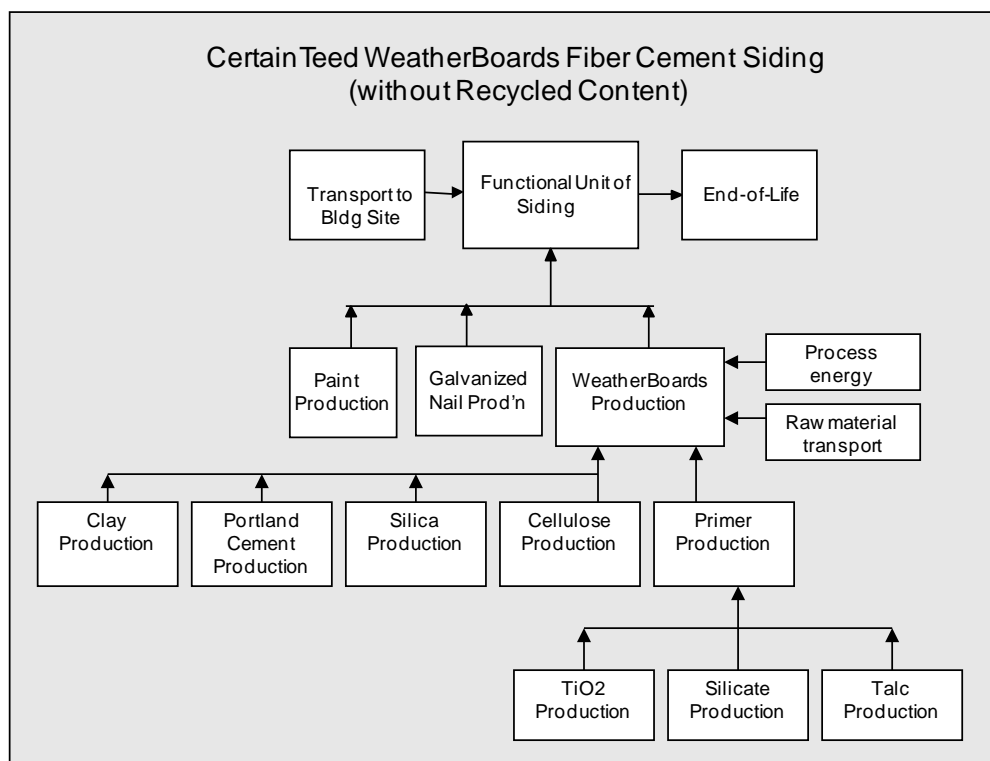


Figure 6-10 CertainTeed WeatherBoards (No Recycled Content) System Boundaries

6.6.3 Raw Materials

CertainTeed Vinyl Siding. The CertainTeed vinyl siding product is made up of the materials shown in Table 6-11.

Table 6-11 Vinyl Siding Constituents (Weighted Average)

<i>Constituent</i>	<i>% in the Siding</i>
PVC resin	73.9 % – 90.3 %
Calcium carbonate	8.6 % – 10.5 %
Acrylic-based additives	2.8 % – 3.4 %
Titanium dioxide	1.5 % – 1.9 %
Lubricant	1.4 % – 1.7 %
Other additives	1.8 % – 2.2 %
Total must equal 100 %	

The PVC resin is based on CertainTeed’s own formulation and manufacturing of the resin. Data for the formulation are not provided in this documentation to protect company confidential data but all elements of that model are based on U.S. LCI database and the ecoinvent database. Production data for the other materials in Table 6-12 are based on the same databases. “Other additives” include pigment, impact modifiers, stabilizers, and process aids. Data for all the materials were provided in Material Safety Data Sheets (MSDS); their production data are included in the LCA model but are excluded from this documentation to protect company confidential data.

Recycled Content CedarBoards. Recycled Content CedarBoards are comprised of three main components: EPS foam, vinyl siding, and lamination glue, as shown in the table below.

Table 6-12 Recycled Content CedarBoards Siding Constituents

<i>Constituent</i>	<i>% in the Siding</i>
Foam backing	10.4 – 12.8 %
CertainTeed vinyl siding with recycled content	78.8 – 96.3 %
Lamination glue	0.8 – 1.0 %

The foam backing is EPS foam board insulation produced by the same producer as described in the documentation for the Insulated Vinyl Siding BEES product.

The recycled content vinyl siding is produced at the Jackson, MI, plant. Table 6-12 on CertainTeed average vinyl siding provides the main bill of materials for the siding, with one exception: 74.3 % of the PVC resin is recycled. According to CertainTeed’s supplier, the recycled content PVC resin comes from both post-industrial (vinyl siding and window manufacturers), and PC (scrap, end of life siding and construction tear-down). The

recycler cleans and shreds the incoming material and produces recycled PVC flakes. General mass balance data were supplied by the recycler. Since primary data on recycling energy could not be obtained from the supplier, PET bottle recycling process energy was used as a proxy (Franklin Associates, 2010). While the energy to shred and reclaim PET bottles may be very different from PVC reclamation processes, the Franklin data are primary data from four reclamation plants in the U.S., and these data are considered to be of very good quality based on data quality evaluation in the report. Table 6-13 provides the recycling energy assumed for PVC recycling.

Table 6-13 PVC Flake Recycling Energy

<i>Energy Source</i>	<i>Quantity per kg PVC flake</i>
Electricity (MJ)	1.66
Natural Gas (MJ)	2.88
LPG & propane (MJ)	0.0076

Energy data come from the U.S. LCI database. The average distance the post-industrial and PC vinyl feedstock is transported to the recycler is 1609 km (1000 mi); this transportation impact is included in the model. The lamination glue is made up of the components in Table 6-14, obtained from the MSDS.

Table 6-14 Lamination Glue Constituents

<i>Constituent</i>	<i>% by mass</i>
Tackifying Resins	42.3 % to 51.7 %
Mineral Oil	18.0 % to 22.0 %
Polymer Solids	24.3 % to 29.7 %
Carbonic Acid	2.7 % to 3.3 %
Talc	2.7 % to 3.3 %

This glue emits minimal VOCs according to the MSDS. The materials in the glue were modeled based on data in the U.S. LCI database and ecoinvent.

Cedar Impressions Siding. Two material mixes are blended together to form Cedar Impressions siding, as shown in Table 6-15.

Table 6-15 Cedar Impressions Constituents

<i>Constituent</i>	<i>% in the Siding</i>
PP resin compound	88.0 % to 100 %
Natural clay color concentrate	0.0 % to 2.4 %

The PP resin compound is made up of PP resin, calcium carbonate filler, and other additives. The natural clay color concentrate is made up of approximately 50 % inorganic, mineral-based compounds and 50 % organic compounds. The full bills of materials for these compounds have been included in the model but are not provided in this documentation to protect company-confidential data. Production data for materials are based on data in the U.S. LCI database and ecoinvent.

Weatherboards Siding. Weatherboards siding constituents with and without recycled content are shown in Table 6-16.

Table 6-16 WeatherBoards Constituents

<i>Constituent</i>	<i>With Recycled Content % by mass</i>	<i>Without Recycled Content % by mass</i>
Portland cement	30 % to 37 %	34 % to 39 %
Fly ash	30 % to 50 %	N/A
Kaolin clay	N/A	2 % to 7 %
Silica	14 % to 34 %	48 % to 53 %
Cellulose	6 % to 10 %	6 % to 10 %
Primer	0.2 %	0.2 %

The data for pulpwood-based cellulose come from the U.S. LCI database. The Portland cement data come from Portland Cement Association (PCA) U.S. industry-average data (PCA, 2016a). Fly ash is a waste material that results from burning coal to produce electricity which could also be a byproduct of coal combustion. Because it would be disposed of if not used beneficially elsewhere, fly ash is assumed to be an environmentally “free” input material. Transport of the fly ash to CertainTeed has been included in the model. The kaolin clay data come from ecoinvent. The silica – silicic acid/calcium salt, or calcium silicate – has been modeled based on stoichiometry of the reactants water glass and slaked lime, which come from ecoinvent data. The primer consists of titanium dioxide, sodium potassium/aluminum silicate, and talc – whose data come from ecoinvent. A loss rate of 6.4 % of all materials except for the primer has been accounted for in the modeling.

6.6.4 Manufacturing

6.6.4.1 CertainTeed Vinyl Siding, Recycled Content CedarBoards, and Cedar Impressions

The manufacturing energy for CertainTeed’s vinyl siding, recycled content CedarBoards, and Cedar Impressions is presented in Table 6-17.

Table 6-17 Energy Requirements for CertainTeed Vinyl- and PP-based Products

<i>Energy source</i>	<i>Quantity per functional unit of product</i>		
	<i>Average vinyl siding</i>	<i>Recycled Content Cedarboards</i>	<i>Cedar Impressions</i>
Electricity (MJ)	0.282 – 0.344	0.376 – 0.460	0.041 – 0.051
Natural Gas (MJ)	0.028 – 0.034	0.324 – 0.396	0.225 – 0.275
Propane (MJ)	0.009 – 0.011	0.077 – 0.094	0.020 – 0.024

Electricity is used to blend the ingredients in the products, propane is used for forklifts, and natural gas is used for plant heating. Electricity production fuels, natural gas, and propane production and combustion come from the U.S. LCI database. Table 6-18 summarizes other manufacturing-related data:

Table 6-18 Other Process Data for CertainTeed Vinyl- and PP-based Products

<i>Process Input or Output</i>	<i>Quantity per functional unit of product</i>		
	<i>Average vinyl siding</i>	<i>Recycled Content Cedarboards</i>	<i>Cedar Impressions</i>
Input: Water use (L)	0.317 – 0.387	0.559 – 0.683	0.706 – 0.862
Output: Wastewater (L)	0.214 – 0.262	0.409 – 0.499	0.599 – 0.733
Output: Waste (kg)	0.010 – 0.012	0.005 – 0.007	0.002 – 0.002

The water is used for product cooling and to run the cooling towers. The wastewater, discharged to the sewer, comes directly from the cooling water use; the discrepancy between the reported water in and out is due to evaporation losses. This water is assumed to be uncontaminated.

There are no manufacturing/product losses; the CertainTeed facilities have systems in place to recycle or recover and use all the floor sweepings and product scrap. For example, the Cedar Impressions scrap is recycled into a part of packaging pallets used throughout CertainTeed plants. The solid waste is non-hazardous material composed of unrecyclable packaging, cafeteria trash, and other miscellaneous trash, and it is landfilled.

Combustion-related air emissions are accounted for in upstream energy use data sets (e.g., natural gas use in a boiler). According to CertainTeed, no other process-related air emissions are generated from these processes.

Lamination of Recycled Content CedarBoards. After the CedarBoards vinyl siding has been manufactured, it is sent to Beach City, OH, to be laminated. The vinyl siding sheets and EPS foam board are hand fed onto a table of rollers. Lines of glue are applied to the foam and then the foam and vinyl are run through a compression roller sealing the foam to the vinyl. The final product is boxed and shipped. The whole process relies primarily on human labor, with only a small amount of electricity being used for the roller machine. This electricity is included as part of the foam production process described in the insulated

vinyl siding Raw Materials section. Transportation by heavy-duty diesel truck from Jackson, MI to Beach City, OH (394 km (245 mi)) is included in the model.

Transportation of CertainTeed Vinyl Siding constituents. Transportation of the raw materials in CertainTeed’s average vinyl siding to the two manufacturing locations has been accounted for, and a weighted average taken based on total production. The PVC resin is transported by rail less than 2500 km (1553 mi) to both locations. The remaining materials are transported by heavy-duty diesel truck, and transportation distances are up to 3000 km (1864 mi). All transportation modes are modeled based on the U.S. LCI database.

Transportation of Recycled Content CedarBoards constituents. Transportation of the raw materials in the recycled content vinyl siding to the Jackson plant has been accounted for. Once manufactured, the siding is transported 394 km (245 mi) by heavy-duty diesel truck from Jackson, MI, to Beach City, OH, to be laminated. The lamination glue is transported less than 1000 km (621 mi) to Beach City. The transportation of the raw materials to Beach City to produce EPS foam is included in the foam production model. All transportation modes are modeled based on the U.S. LCI database.

Transportation of Cedar Impressions constituents. Transportation of the raw materials to CertainTeed has been accounted for. The PP resin compound is transported by rail less than 1500 km (932 mi) and the natural clay color concentrate is transported by heavy-duty truck less than 1000 km (621 mi). All transportation modes are modeled based on the U.S. LCI database.

6.6.4.2 CertainTeed WeatherBoards With and Without Recycled Content

WeatherBoards are produced by creating a slurry with water and the raw materials. Electricity is used for this blending. The slurry is then shaped into the WeatherBoards boards which are subsequently dried in the “kiln” using natural gas heat. Gasoline, diesel, and propane fuels are used in various facility vehicles, including forklifts. A summary of the manufacturing energy for CertainTeed WeatherBoards is presented in Table 6-19.

Table 6-19 Energy Requirements for WeatherBoards

<i>Energy source</i>	<i>MJ per functional unit</i>	
	<i>With Recycled Content</i>	<i>No Recycled Content</i>
Electricity	0.810 – 1.07	0.857 - 1.12
Natural Gas	2.12 – 2.16	2.23 – 2.26
Diesel Oil	0.036	0.038
Gasoline	0.002	0.002
Propane	0.014 – 0.017	0.014 – 0.017

Electricity production fuels, natural gas, and the other fuels' production and combustion come from the U.S. LCI database. Table 6-20 summarizes other manufacturing-related data:

Table 6-20 Other Process Data for WeatherBoards

<i>Process Input or Output</i>	<i>Quantity per functional unit</i>	
	<i>With Recycled Content</i>	<i>No Recycled Content</i>
Input: Water use (L)	0.414 – 0.711	0.442 – 0.739
Output: Waste (kg)	0.086 – 0.094	0.091 – 1.000

Water is used to form the slurry. No water emissions are generated as the water from the slurry evaporates; the Roaring River facility is a zero-discharge facility. Solid waste includes process losses at the plant which are landfilled. Process-related air emissions are generated from processing WeatherBoards. These emissions are included in the model but not in this documentation. Combustion-related air emissions are accounted for in upstream energy use data sets (e.g., from natural gas use in the kiln).

Transportation of CertainTeed WeatherBoards constituents. Transportation of the raw materials to Roaring River, NC have been accounted for, with distances by diesel truck ranging from 290 km (180 mi) to 724 km (450 mi). The primer is shipped 434 km (270 mi) by rail. One of the materials is shipped approximately 5000 km (3108 mi) by ocean freighter to a port on the U.S. east coast and then trucked the remaining distance. All transportation modes are modeled based on the U.S. LCI database.

6.6.5 Packaging and Transportation

Packaging of the final CertainTeed products were included in these BEES models. Data for packaging is based on the industry average vinyl siding and insulated vinyl siding data provided by Sustainable Solutions Corporation for those products in BEES. Packaging includes paper labels, plastic strapping, low-density polyethylene (LDPE) plastic wrap and weather bags, cardboard, and pallets.

Transportation of CertainTeed Vinyl Siding and Recycled Content Cedarboards to Installation. These finished products are transported an average of 1400 km (870 mi) by diesel truck to their respective building sites. The nails used at installation are assumed to be transported 241 km (150 mi) by diesel truck to the building sites. The BEES user may change the default transportation distance for the main products.

Transportation of CertainTeed Cedar Impressions to Installation. The finished Cedar Impressions siding is transported an average of 3620 km (2250 mi) by diesel truck to the building site. The nails used at installation are assumed to be transported 241 km (150 mi) by diesel truck to the building site. The BEES user may change the default transportation distance for the main product.

Transportation of CertainTeed WeatherBoards to Installation. The finished WeatherBoards siding is transported an average of 950 km (590 mi) by diesel truck to the building site. Both the nails and the paint used at installation are assumed to be transported 241 km (150 mi) by diesel truck to the building site. The BEES user may change the default transportation distance for the main products.

6.6.6 Installation

Installation of the CertainTeed products is done primarily by manual labor. These products are modeled as being installed with nails and a nail gun to be consistent with other siding products in BEES. The CertainTeed products are also commonly installed with a hammer and nails. For the vinyl-based sidings and WeatherBoards, nails are installed 41 cm (16 in) on center. The nails are modeled as galvanized steel, and for installation 41 cm (16 in) on center, 0.026 kg/m² (0.005 lb/ft²) of siding is used. Cedar Impressions are installed with galvanized steel nails 26.7 cm (10.5 in) on center. For installation 26.7 cm (10.5 in) on center, 0.04 kg/m² (0.008 lb/ft²) of siding is used. The energy required to operate compressors to power air guns and circular saws for cutting is assumed to be very small and is not included in the analysis. In addition to nails, WeatherBoards require two coats of paint at installation, each coat amounting to 0.094 kg/m² (0.019 lb/ft²) on a dry basis. A solvent based paint modeled for BEES is used for the model.

The model assumes an average installation waste of 5 % by mass for each product, and this waste is assumed to go to a landfill. While sheathing, weather resistive barriers, and other ancillary materials may be required to complete the exterior wall system, these materials are not included in the system boundaries for BEES exterior wall finishes.

6.6.7 Use

These products are modeled as having useful lives of 60 years. Thus, one initial installation and use period is modeled for the BEES functional lifetime. WeatherBoards are modeled as being repainted with one coat of paint every fifteen years, for a total of three additional paint coatings over the course of 60 years. No other routine maintenance is required to prolong the lifetime of the products, although cleaning is recommended to maintain appearance. Cleaning would normally be done with water and household cleaners. Information on typical cleaning practices (e.g., frequency of cleaning, types and quantities of cleaning solutions used) was not available. Besides paint needed for WeatherBoards, maintenance is not included in the system boundaries.

6.6.8 End of Life

Each of these products is assumed to be disposed of in a landfill at end of life. End of life modeling includes transportation of the product and installation materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and

disposal in a landfill is modeled based on ecoinvent end of life waste management process data.

6.7 Generic Vinyl Siding and Insulated Vinyl Siding

Vinyl siding is used as an exterior wall finish on new and renovated construction. Since its introduction in the 1960s, vinyl siding has become one of the more popular exterior wall finishes for new construction. Vinyl siding is manufactured in a wide variety of profiles, colors, and thicknesses to meet different market applications. Vinyl siding is commonly produced as double units that have the appearance of two overlapping or adjoining 11.4 cm wide (4.5 in wide) boards. Double 4.5 is the most common profile. The mass of vinyl siding is 19.3 kg (42.4 lb) per 9.29 m² (100 ft²) for a typical 0.102 cm (0.040 in) thickness. For the BEES system, 0.102 cm (0.040 in) thick, 23 cm (9 in) wide horizontal vinyl siding installed with galvanized nail fasteners is studied. The nails are assumed to be placed 41 cm (16 in) on center.

Insulated vinyl siding uses an EPS foam-contoured material designed to enhance the performance characteristics of vinyl siding. Compressed EPS beads are expanded into foam board and then laminated onto vinyl siding. The foam contouring characteristic improves the thermal performance of the external wall system by eliminating any voids behind the vinyl's hollow siding, thereby saving energy during its use. It is also intended to discourage mold growth and repel termites with the help of an insecticide.

6.7.1 Product Description

Insulated vinyl siding modeled for BEES is 22.4 kg (49.3 lb) per 9.29 m² (100 ft²) and is typically installed with galvanized nail fasteners placed 41 cm (16 in) on center. Insulated vinyl siding has thermal resistance values ranging from R_{SI}-0.35 to R_{SI}-0.70 (R_{US}-2 to R_{US}-4)⁶⁸; the product in BEES has a value of R_{US}-2.57 according to ASTM International Standard 1363 test results. Despite the added insulation and reduced thermal bridging, the building still requires base insulation which is not included in BEES for this category. Thermal performance differences among exterior wall finish alternatives are not accounted for in BEES, but it should be considered when interpreting BEES results.

Data described in this chapter and modeled for BEES are based on the Vinyl Siding Institute's (VSI) LCA covering these two products. Data are primarily from North American facilities and manufacturers, collected for the year 2015. While siding is generally specified in terms of 'squares' of siding, or 9.29 m² (100 ft²), for BEES, the functional unit is 0.09 m² (1 ft²) of siding used in a building for 60 years.

6.7.2 Flow Diagram

⁶⁸ Units for R_{SI} and R_{US} are °C-m²-sec/J and °F-ft²-s/BTU, respectively.

The flow diagrams in Figure 6-11 and Figure 6-12 show the major elements of the production of these products as they are currently modeled for BEES.

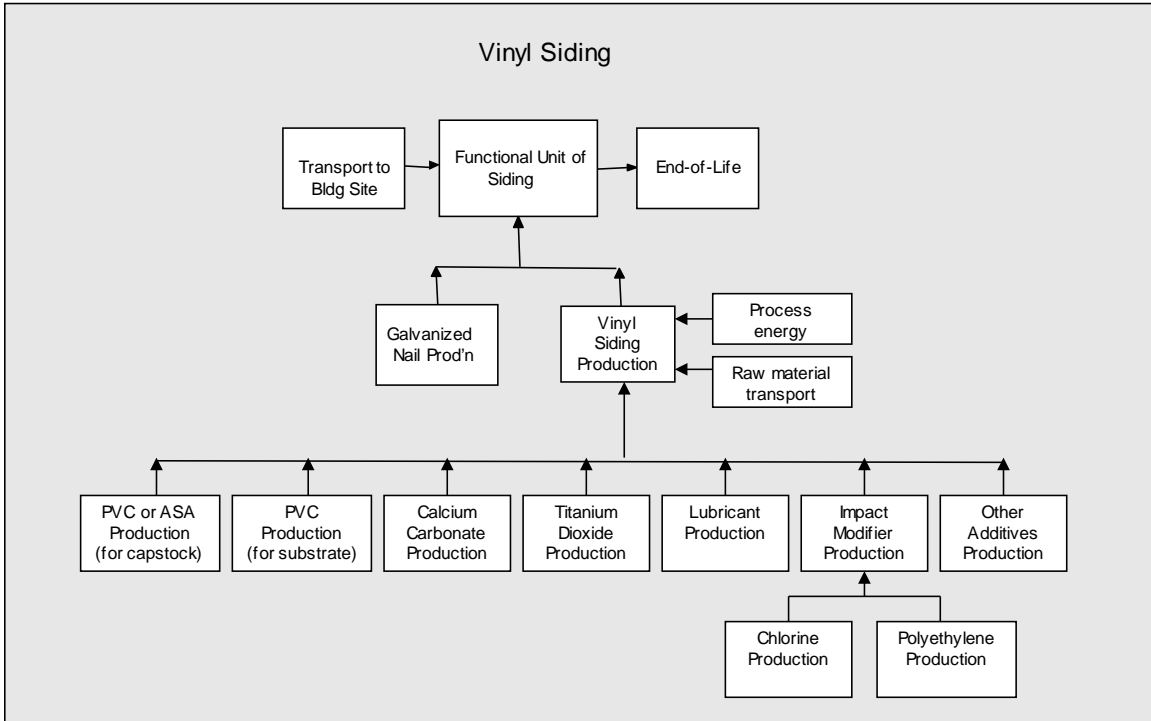


Figure 6-11 Vinyl Siding System Boundaries

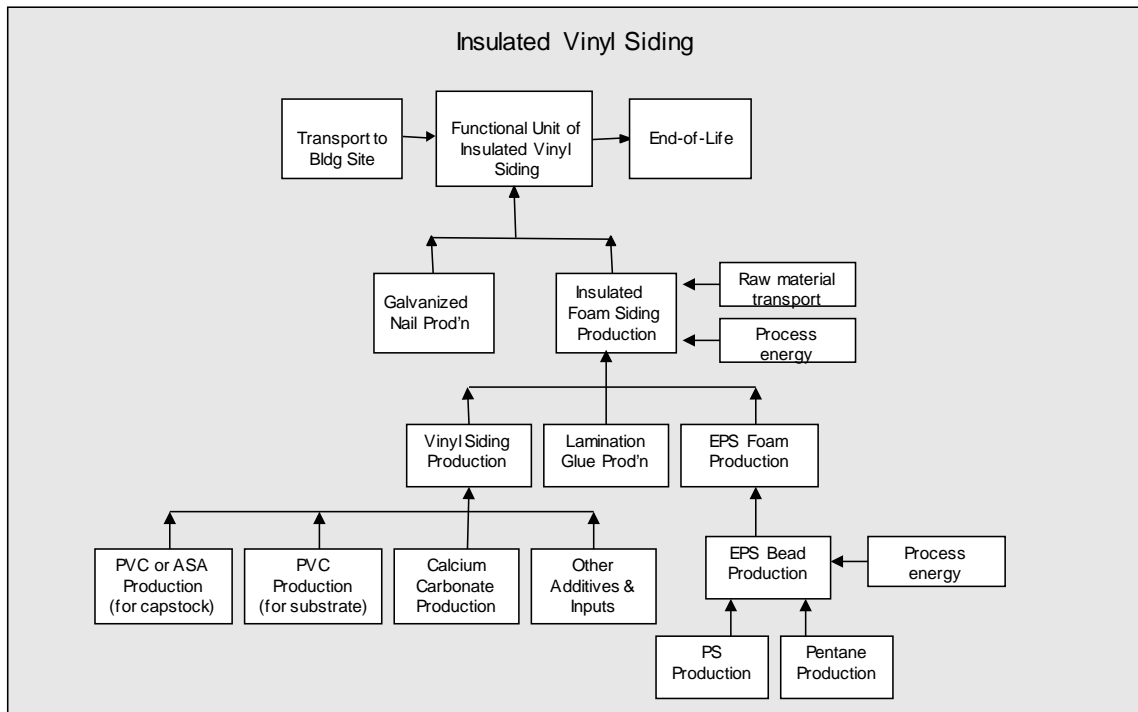


Figure 6-12 Insulated Vinyl Siding System Boundaries

6.7.3 Raw Materials

Vinyl siding is composed of two layers: the substrate and the capstock, which is the surface exposed to the outside and formulated to be more weather resistant. The vinyl siding product in BEES represents 50 % siding made with PVC capstock and 50 % made with acrylonitrile styrene acrylate (ASA) capstock.⁶⁹ The formulation in Table 6-21 presents the average of the these two formulations by mass percentage (Sustainable Solutions Corporation, 2016):

Table 6-21 Vinyl Siding Constituents

<i>Constituent</i>	<i>Average of the PVC and ASA Capstocks</i>
PVC	74%
ASA	6.0%
Calcium carbonate (limestone)	10%
Impact modifier	2.0%
Titanium dioxide	1.6%
Lubricants	1.8%
Other additives	4.6%
Total	100 %

The PVC resin comes from the U.S. LCI database. The impact modifier, a chlorinated polyethylene, is produced from the chlorination of polyethylene. Data for both chlorine and polyethylene used to build the impact modifier come from the U.S. LCI database. ASA is modeled as acrylonitrile-butadiene-styrene copolymer resin, from the U.S. LCI database. Titanium dioxide and calcium carbonate come from ecoinvent. “Other additives” include pigment, stabilizer, process aids, and sealant; production data for these substances are based on materials in the U.S. LCI and ecoinvent databases. Some of the additives’ data sets were built using Material Data Sheets and/or stoichiometry.

6.7.4 Manufacturing

6.7.4.1 Vinyl Siding

According to Sustainable Solutions Corporation (2016), vinyl siding manufacturing is a very efficient extrusion process requiring relatively low inputs of energy and water. The ability to immediately return scrap and off-specification materials (regrind) directly into the manufacturing process results in minimal manufacturing waste. Technological advances have allowed for vinyl siding to be co-extruded with a substrate and a capstock. As described in Sustainable Solutions Corporation (2016), “Co-extrusion allows for a

⁶⁹ Note: PVC capstock currently has a slightly higher market share but siding with ASA capstock is expected to become more dominant in the coming years.

more durable product, enabling colors and textures to retain their original appearance and performance capabilities over time.”

Energy and other inputs. Manufacturing energy and water use are presented in Table 6-22.

Table 6-22 Energy and Water Requirements for Vinyl Siding

<i>Fuel Use</i>	<i>Quantity per kg Siding</i>
Electricity MJ (kWh)	0.896 (0.249)
Natural Gas m ³ (scf)	0.003 (0.110)
Propane l (gal)	2.3 E-3 (6.2 E-4)
Gasoline l (gal)	1.6 E-6 (4.0 E-7)
<i>Water Use l (gal)</i>	0.829 (0.219)

The electricity is used for raw materials mixing, extrusion, machining, lighting, air compressors, cooling water pumps, grinding operations, and other miscellaneous equipment. The natural gas is used for space heating, and the propane and gasoline are used in mobile equipment. Electricity production sources and the fuels production and combustion come from the U.S. LCI database. Water is make-up for process cooling, and to a small extent, cleaning and domestic use.

Manufacturing outputs. The amount of wastewater generated is 0.54 L/kg (0.065 gal/lb) siding. The difference between the reported water in and out is mainly due to evaporation losses in the closed loop cooling water systems utilized by most of the plants. The BEES model includes treatment with water treatment chemicals so this water is assumed to be uncontaminated. A small quantity of inert waste which includes some PVC, 0.027 kg per kg siding, is generated and landfilled. Combustion-related air emissions are accounted for in upstream energy use data sets (e.g., natural gas use in a boiler). Process-related air emissions reported for BEES are shown in Table 6-23.

Table 6-23 Air Emissions Data for Vinyl Siding

<i>Emission</i>	<i>Quantity (kg per functional unit)</i>
Dichloroethene	1.31 E-10
Vinyl Chloride	1.24 E-05

Transportation of vinyl siding constituents. Transportation of the raw materials to siding facilities has been quantified in Sustainable Solutions Corporation (2016) and accounted for in BEES. For vinyl siding, materials are transported an average of 170 kg-km (603 lb-mile) by truck and 150 kg-km (532 lb-mile) by train. Train and diesel-powered combination trucks are modeled based on the U.S. LCI database.

Packaging. Industry-average packaging data were provided by Sustainable Solutions and includes paper labels, plastic strapping, LDPE plastic wrap and weather bags, cardboard, and wood pallets.

6.7.4.2 Insulated Vinyl Siding

The three main components of insulated vinyl siding are shown in Table 6-24.

Table 6-24 Insulated Vinyl Siding Constituents

<i>Constituent</i>	<i>Kg per ft²</i>	<i>% by mass</i>
Foam backing	0.028	12.5 %
Vinyl siding	0.193	86.0 %
Lamination glue	0.0033	1.5 %

The insulated vinyl siding facility first makes EPS foam board by compressing EPS foam beads and expanding them using steam from a natural gas-fired steam generator. Insulated vinyl siding is produced when the EPS foam board and a sheet of vinyl siding are hand fed onto a table of rollers. Lines of glue are applied to the foam and then the foam and vinyl are run through a compression roller, sealing the foam to the vinyl. Prior to lamination, the foam is trimmed to match the vinyl profile. These pieces are then boxed and shipped. The whole process relies primarily on human labor, with a small amount of electricity for the roller machine. Foam trim, 0.29 kg/kg foam, is recovered and sent to a recycler.

VSI through Sustainable Solutions supplied the energy use, water use, and emissions, including pentane release, at the foam production and siding lamination plant but these data cannot be released since they are proprietary and not averaged with other facilities' production data. Electricity production, fuels, and combustion come from the U.S. LCI Database.

Data for the vinyl siding has been described above. The lamination glue used is made up of the components shown in Table 6-25.

Table 6-25 Laminated Glue Constituents

<i>Constituent</i>	<i>% by mass</i>
Tackifying Resins	47.0 %
Mineral Oil	20.0 %
Polymer Solids	27.0 %
Carbonic Acid	3.0 %
Talc	3.0 %

These materials are modeled based on elements of the U.S. LCI database and ecoinvent.

Transportation of insulated vinyl siding constituents. Transportation of the raw materials to siding facilities has been quantified in Sustainable Solutions Corporation (2016) and accounted for in BEES. For insulated vinyl siding, vinyl siding and the lamination glue

are transported an average of 420 kg-km (1490 lb-mile) by truck and 150 kg-km (532 lb-mile) by train.⁷⁰ The EPS foam beads come from domestic and foreign suppliers; the distances and modes of transportation, including ocean freighter, rail, and diesel-powered combination truck, are included in the model. The transportation data are based on the U.S. LCI database.

Packaging. Industry-average packaging data were provided by Sustainable Solutions and includes paper labels, plastic strapping, LDPE plastic wrap and weather bags, cardboard, and wood pallets.

6.7.5 Transportation

The finished vinyl siding and insulated vinyl siding products are transported a weighted average distance of 509 km (316 mi) by diesel truck to the building site. Nails used for installation are assumed to be transported 241 km (150 mi) by diesel truck to the building site. The BEES user may change the assumed transport distances for the main products.

6.7.6 Installation

Installation for both products is done primarily by manual labor. Nails or screws can be used to install the siding; nails are more common and would typically be the type installed with a gun. The energy required to operate compressors to power air guns is assumed to be small and is not included in the analysis. Installation is modeled for nails placed 41 cm (16 in) on center; nail use is 0.0024 kg (0.0053 lb) per 0.09 m² (per ft²) of siding. Installation waste with a mass fraction of 5 % is assumed, and this waste is assumed to go to a landfill.

While sheathing, weather resistive barriers, and other ancillary materials may be required to complete the exterior wall system, these materials are not included in the system boundaries for BEES exterior wall finishes.

6.7.7 Use

The vinyl siding products have an assumed useful life of 60 years. No routine maintenance is required to prolong the lifetime of the product, although cleaning is recommended to maintain appearance. Cleaning would normally be done with water and household cleaners. Information on typical cleaning practices (e.g., frequency of cleaning, types and quantities of cleaning solutions used) was not available; maintenance was not included in the system boundaries.

6.7.8 End of Life

At end of life, these products are assumed to be disposed of in a landfill. End of life modeling includes transportation of these materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a

⁷⁰ Sustainable Solutions Corporation (2016), Table 4.4

landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based on ecoinvent end of life waste management process data.

6.8 Generic Aluminum Siding

Aluminum siding or cladding is a commonly-used exterior wall cladding that is known for its light weight and durability. Aluminum siding typically has an exterior coating to provide color and durability. Common coatings include acrylic, polyester, and vinyl.

6.8.1 Product Description

For the BEES system, the functional unit is 0.09 m² (one ft²) of exterior wall area of aluminum siding used for 60 years. The aluminum siding panels in BEES are 20 cm (8 in) wide and 22 gauge or 0.064 cm (0.025 in) thick. The siding is fastened using aluminum fasteners every 41 cm to 61 cm (16 in to 24 in).

6.8.2 Flow Diagram

The flow diagram in Figure 6-13 shows a simplistic flow diagram of the major elements of the production of this product, as it is currently modeled for BEES.

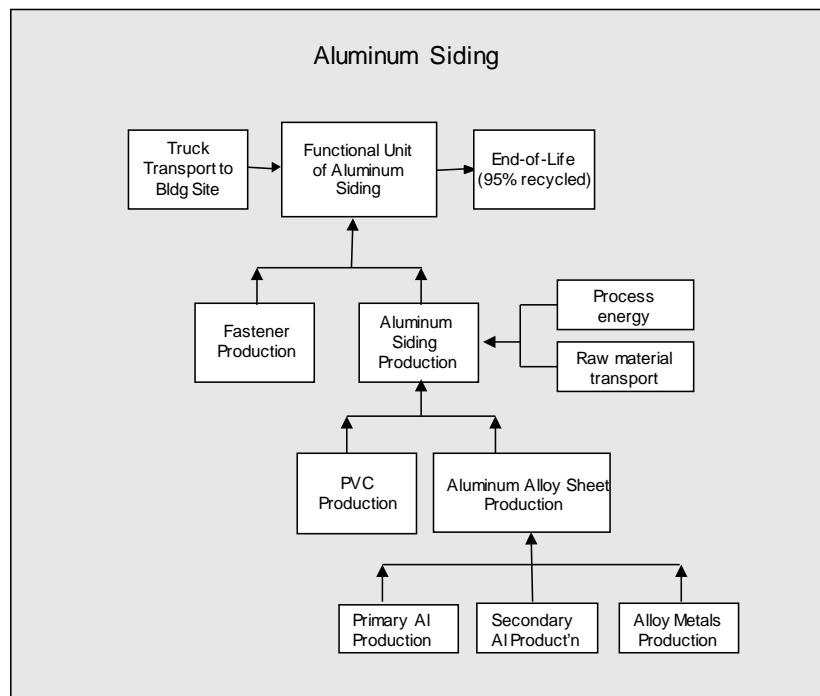


Figure 6-13 Aluminum Siding System Boundaries

6.8.3 Raw Materials

There are several aluminum siding products on the market, most of which are manufactured using different combinations of aluminum alloys and coating materials. Coating formulations are generally proprietary; the product studied for the BEES system

is manufactured as an aluminum sheet with a PVC thermoset topcoat. The installed product is modeled with a mass of 0.19 kg (0.42 lb) of aluminum siding (PAC-CLAD, 2015), and Table 6-26 presents the major constituents and their percentages.

Table 6-26 Aluminum Siding Constituents

<i>Constituent</i>	<i>Mass kg/m² (lb/ft²)</i>	<i>Mass Fraction (%)</i>
Aluminum Alloy Sheet	2.04 (0.419)	99.0
PVC Topcoat	0.020 (0.004)	1.0

Aluminum production. The data for the aluminum in this product come from the Aluminum Association (AA) North American industry average LCA data on semi-finished aluminum products (AA, 2013).⁷¹ AA (2013) includes detailed primary (i.e., facility) data for primary aluminum production, including bauxite mining; production of alumina, which converts the mined bauxite into aluminum oxide; production of anode, an auxiliary input; smelting by electrolysis using the Prebake and Söderberg technologies, and primary ingot casting. AA (2013) also includes primary data to produce secondary aluminum, including scrap collection and processing and scrap melting and ingot casting. The flat rolling processes to produce aluminum sheets and coils first undergo hot rolling, which produce hot rolled coils, and then cold rolling, which takes hot-rolled coil or strip and produces cold rolled coil and products.⁷² Aluminum sheet for siding may be produced from hot-rolled or cold-rolled coil. For BEES, it is assumed that 50 % is made up of hot rolled coil and 50 % of cold rolled.

According to the Aluminum Association, the estimated recycled content of aluminum building materials used today is between 50 % and 85 %.⁷³ For BEES, it is modeled as 67 %, based on the modeling and data in AA (2013). Primary data collected from AA (2013) of participating aluminum companies' North American facilities are representative for the year 2010. Data for the sheet rolling processes are based on years 2008 to 2011.

The aluminum sheet in the BEES model has been modeled using the Substitution Approach, also called the “Avoided Burden Approach”, which considers production and end of life recycling loops. According to AA (2013) (p.22-24):

“The recommendation of the Substitution Approach is based on the characteristics of aluminum products and aluminum recycling, which preserves the full physical properties of the metal without losses of quality no matter how many times it is recycled. The aluminum recycling system is a semi-closed-loop system in which the recycled aluminum could end up

⁷¹ Note that this source was the most recent available data from AA at the time of this publication

⁷² The interested reader is encouraged to go to www.aluminum.org for more information on its LCAs, including detail on process descriptions and unit process inputs and outputs.

⁷³ Found at: <http://www.aluminum.org/product-markets/building-construction>

with the same product system, e.g., extruded to extruded products, flat-rolled to flat-rolled products, and shape-casted to shape-casted products, or in other cases, the recycled aluminum from one product system could be used for other product systems depending on the efficient allocation of aluminum scraps by market forces...The system flow chart for Substitution Approach is shown in Figure 6-14.”

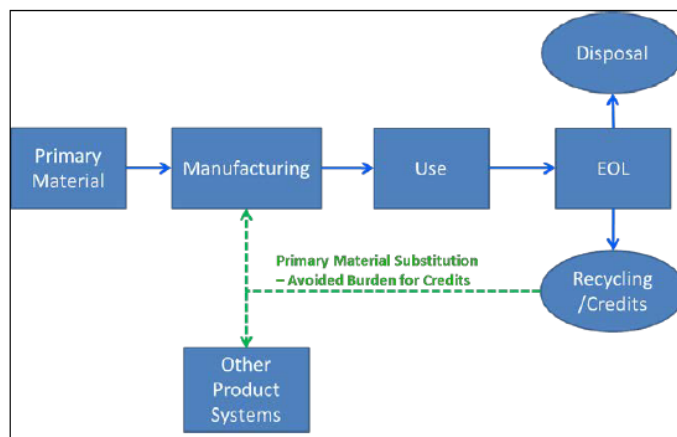


Figure 6-14 Process Flow Char for a Substitution Approach

“Under this framework, the product being examined is completely recycled once it reaches the end-of-life phase. Material losses are considered during the collection and processing of scrap as well as those associated with the production of secondary material (the melting and/or re-melting process). The lost material is replenished with the primary material to keep the system closed. Consistent with ISO 14044, the net recovered metal is a substitution of the same amount of primary metal and therefore help avoid the burdens associated with the primary metal production. A credit is given for such a substitution.”

Other materials production. The vinyl topcoat is 0.08 mm to 0.09 mm (3.3 mil to 3.7 mil) thick. Data to produce PVC come from the U.S. LCI database. Alloys are used in metals to improve their performance characteristics. There are many aluminum alloying designations, and a subset of these alloys can be used in building and construction, depending on the specific needs of the application. Magnesium as a primary alloying agent helps to increase the strength of aluminum. The Aluminum Association classifies the anodized 5005 sheet as a common alloy application for architectural applications.⁷⁴ While other alloy series, including 1xxx, 3xxx, and 6xxx, offer designations that may also be applicable for use in building and construction, we use aluminum 5005 as a general guidance for the alloying composition used for BEES. Namely, a composition of

⁷⁴ Found at: <http://www.aluminum.org/resources/industry-standards/aluminum-alloys-101>

0.8 % magnesium, 0.7 % iron, 0.3 % silicon, 0.25 % zinc, 0.2 % copper, and 0.2 % manganese is assumed.⁷⁵ The data for these elements were provided byecoinvent.

6.8.4 Manufacturing

Energy Requirements and Emissions. Energy requirements and emissions for production of the rolled aluminum alloy and PVC resin are included in the BEES data for the raw material acquisition life cycle stage (described above). The model does not include the energy demands or emissions associated with application of PVC topcoat to the aluminum siding or cutting of the panels at the fabrication plant due to lack of available data.

Packaging. Product packaging data come from the PAC-CLAD EPD due to lack of other packaging data on roll-form aluminum panels. According to the EPD, packaging of aluminum panels per 1000 ft² includes 227 kg (500 lb) wood, 0.249 kg (0.55 lb) plastic, assumed to be LDPE packaging film, and 2.13 kg (4.7 lb) paper. Data for wood comes from the U.S. LCI database and data for LDPE film and paper come from ecoinvent.

Transportation to fabrication plants. Transportation of rolled aluminum and PVC resin to aluminum siding mills is assumed to be 402 km (250 mi) by truck.

6.8.5 Transportation

Transportation of the fabricated aluminum siding to the building site is modeled using heavy-duty truck an average of 805 km (500 mi) to the building site. The BEES user may change this default distance.

6.8.6 Installation

Aluminum siding installation is predominately a manual process - a small amount of energy may be required to operate compressors to power air guns, but this energy use is assumed to be small and is not included in the analysis. Fasteners may be placed every 41 cm to 61 cm (16 in to 24 in), using an average of 0.006 kg (0.013 lb) of aluminum fasteners per ft² of siding. Installation waste with a mass fraction of 5 % is assumed, and all waste is assumed to go to a metals recycler. While sheathing, weather resistive barriers, and other ancillary materials may be required to complete the exterior wall system, these materials are not included in the system boundaries for BEES exterior wall finishes.

6.8.7 Use

The product is assumed to have a useful life of 80 years. In some instances, siding without significant corrosion damage can be found after 100 years. However, owners may replace siding for reasons other than corrosion (e.g., to update the home's exterior

⁷⁵ Alloy percentages found at: <https://continentalsteel.com/aluminum/grades/alloy-5005/>

appearance or change the color). It is assumed for the model that the siding remains in place over the 60-year study period.

Buildings with aluminum siding are periodically cleaned, usually for aesthetic reasons. Information on typical cleaning practices (e.g., frequency of cleaning, types and quantities of cleaning solutions used) is not available; no use phase impacts from cleaning are included.

6.8.8 End of Life

Because aluminum scrap has a significant economic value, the model assumes a 95 % recycling rate for the siding at end of life, which is typical for aluminum products in the construction market sector. This rate is consistent with AA (2013). Recycling at end of life is accounted for in the cradle-to-grave production data for hot rolled and cold rolled coils using the Substitution Approach.

6.9 Generic Brick

Brick is a masonry unit of clay or shale, formed into a rectangular shape while plastic, cored, and then fired in a kiln. Mortar is used to bond the bricks into a single element. Facing brick or hollow brick are commonly used in brick veneer as a part of exterior wall assemblies.

6.9.1 Product Description

The BEES model for brick and mortar evaluates a modular-sized brick unit that represents fired clay facing brick and hollow brick. The brick unit evaluated has actual dimensions assumed to be 92 mm x 57 mm x 194 mm ($3\frac{5}{8}$ in. \times $2\frac{1}{4}$ in. \times $7\frac{5}{8}$ in.). The nominal dimensions of the brick unit including the mortar joint are 102 mm \times 68 mm \times 203 mm (4 in. \times $2\frac{2}{3}$ in. \times 8 in.). The brick unit is cored prior to being fired, which removes about 25 % to 30 % of the clay or shale material. The cored and fired brick unit weighs 1.7 kg (3.7 lb).

The brick is assumed to be installed with Type N mortar, which has a density of 1840 kg/m³ (115 lb/ft³) and a maximum air content of 20 %. Masonry is typically measured based on wall area (m² or ft²). A brick wall is assumed to be 80 % brick and 20 % mortar by surface area. For BEES, the functional unit is 0.09 m² (1 ft²) of siding used in a building for 60 years.

6.9.2 Flow Diagram

The flow diagram in Figure 6-15 shows the major elements of the production of this product, as it is currently modeled for BEES.

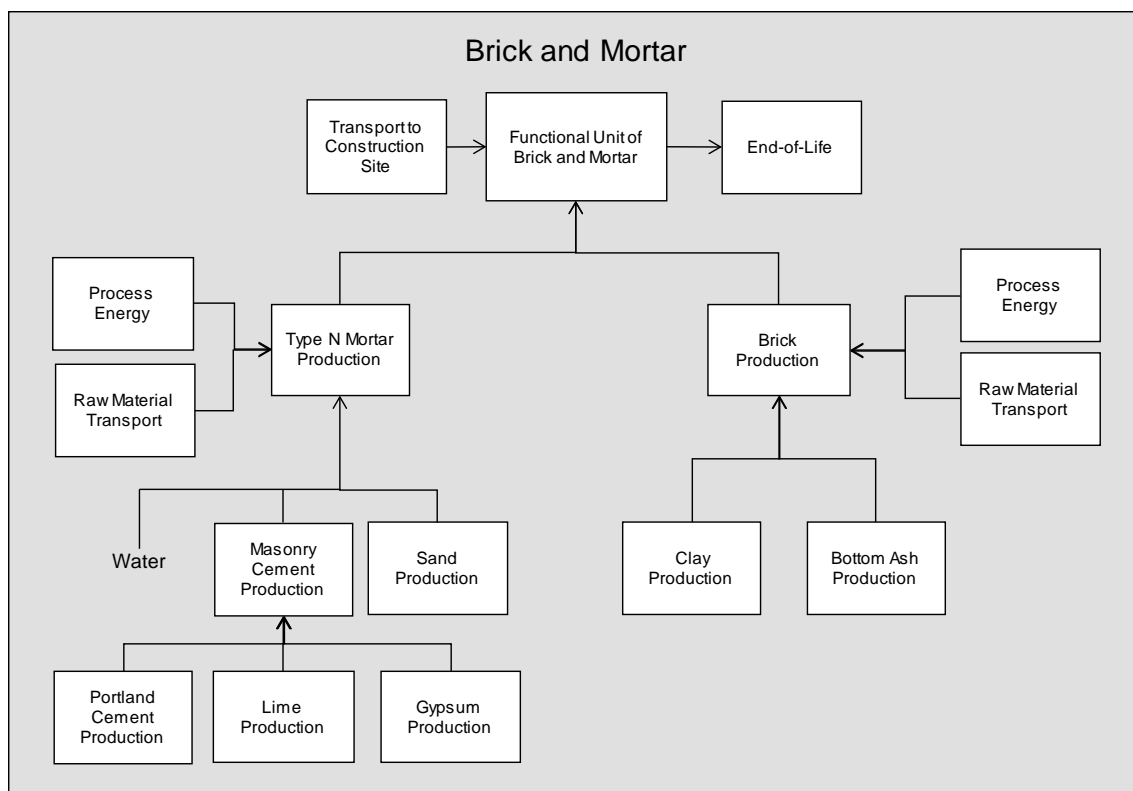


Figure 6-15 Brick & Mortar System Boundaries

6.9.3 Raw Materials

Table 6-27 shows that brick uses virtually 100 % mined clay or shale. Bottom ash, a post-industrial recycled material, is the most widely used recycled material that is added to the clay or shale during brick production. Typical replacement of clay or shale inputs is 0.8 % bottom ash by mass.

Table 6-27 Fired Brick Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Clay	99.2
Bottom Ash	0.8

All material removed in the manufacturing process is returned to the manufacturing stream. Fired product that is scrapped is used as grog⁷⁶ in brick manufacturing or for other uses such as landscape chips and roadbed. Type N mortar consists of one-part masonry cement (by volume fraction) and three parts natural or manufactured sand,⁷⁷ and adequate water to achieve the proper consistency. Mixing 0.009 m³ (1/3 ft³) of masonry

⁷⁶ Grog is previously-fired ceramic material, typically from ground brick. It is included in the brick body to reduce drying shrinkage or provide a more open texture to the fired brick.

⁷⁷ Based on ASTM Specification C270-12a.

cement, 0.028 m³ (1 ft³) of sand, and approximately 6.3 l (1.7 gal) of water yields about 0.028 m³ (1 ft³) of mortar. The raw material used for masonry cement is based on Type N masonry cement, and its constituents are shown in Table 6-28 (PCA, 2016b).

Table 6-28 Masonry Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Portland cement clinker	57.5 %
Limestone	36.1 %
Gypsum	4.9 %
Dust (e.g., bypass dust)	1.1 %
Other inputs	0.5 %
Total	100.0

The materials for masonry cement are based on ecoinvent customized to U.S. conditions. Some water in mortar is chemically bound, so there is some net consumption of water—based on 25 % by weight for hydration, approximately 57 kg (3.5 lb) of water is chemically bound for every 0.028 m³ (1 ft³) of mortar produced.

6.9.4 Manufacturing

Energy Requirements and Emissions. The energy requirements for brick production are listed in Table 6-29. These values are based on the drying and firing production steps in the manufacturing process, as these processes are the most energy-intensive steps. Although upgraded electrical motors have been incorporated into many plants, the overall horsepower requirements have not changed, so the amount of electricity used remains similar. A blend of grid electricity sources is used to represent the distribution of manufacturing facilities.

Table 6-29 Energy Requirements for Brick Manufacturing⁷⁸

<i>Energy Carrier</i>	<i>Quantity per Lb</i>
Natural Gas	0.022 m ³ to 0.025 m ³ (0.775 ft ³ to 0.871 ft ³)
Grid Electricity	0.0810 MJ (0.0225 kWh)

Emissions for brick firing and drying are based on AP-42 data for emissions from brick manufacturing for each manufacturing technology and type of fuel burned (EPA, 1997).⁷⁹

Brick production is distributed across U.S. Census Regions as shown in Table 6-30.

⁷⁸ As determined by the National Brick Research Center based on existing records and data from brick manufacturers and selected equipment vendors.

⁷⁹ According to the Brick Industry Association (BIA), AP-42 emissions data are likely to be overstated, as at least 80 brick kilns have added emission control devices in the past ten years. However, EPA has yet to update AP-42 with this additional information.

Table 6-30 U.S. Brick Production by Census Region⁸⁰

<i>Census Region</i>	<i>Brick Production</i>
Pacific	3.4 %
Mountain	3.3 %
West South Central	29.6 %
East South Central	14.2 %
South Atlantic	28.4 %
West North Central	4.0 %
East North Central	11.8 %
Middle Atlantic	4.1 %
New England	1.2 %

Water Consumption. Water is used in the manufacturing process to impart plasticity to the raw materials, which allows the brick to be formed. Although water is used in brick manufacturing, it is not chemically altered or bound but is evaporated into the atmosphere. Approximately 35 % of plants use some amount of recycled water. Approximately 11 % of plants use only recycled water (Ducker, 2008). On average, approximately 20.5 % of the weight of formed brick is water and is returned to the atmosphere during the drying process.

Transportation of Raw Materials. Brick manufacturers often locate their facilities near readily available clay sources to reduce transportation. Brick raw materials are typically transported by truck from the pit to the brick plant. The average distance from the pit to the plant is approximately 24 km (15 mi) (Brick Industry Association, 2009).

Waste. Brick manufacturing is very efficient. Processed clay and shale removed in the forming process before firing are returned to the production stream. Brick not meeting standards after firing are culled from the process and ground to be used as grog in manufacturing brick or crushed to be used as landscaping material. Scrap loss due to the manufacturing process is only 3 % (Brick Industry Association, 2017).

6.9.5 Transportation

Transportation of brick to the building site is modeled as a variable of the BEES system. Most brick is transported by truck with a much smaller amount shipped by rail (95 % and 5 %, respectively) to the building site. The average distance shipped is 298 km (185 miles) by truck and 961 km (597 miles) by rail. The BEES user may change the transportation distance in the tool.

⁸⁰ Brick Industry Association (2017)

6.9.6 Installation

Mortar is assumed to be delivered to a job site in 0.76 m^3 (1 yd^3) bags ($\sim 2.7 \text{ kg}$ or $\sim 94 \text{ lb}$). Installation of brick and mortar primarily consists of manual labor; no energy use is modeled for the installation phase. Losses during the installation phase are estimated to be 5 % of total materials per ft^2 . Waste from the installation process is typically landfilled. While sheathing, weather resistive barriers, and other ancillary materials may be required to complete the exterior wall system, these materials are not included in the system boundaries for BEES exterior wall finishes.

6.9.7 Use

Brick walls are often in service for more than 100 years. Older buildings are adapted to new uses, with the existing brick walls included as a design feature. A useful life of 200 years is assumed. If properly designed, detailed and constructed, brick veneer walls require very little maintenance. Some components within the masonry wall system may require periodic maintenance and repair. For example, repointing mortar joints on portions of the wall may be required after 50 years, but this minor maintenance task was not included within the system boundary of the model.

While buildings with brick and mortar finishes require insulation, the finish itself provides a thermal resistance value of about $R_{SI}-0.16$ ($R_{US}-0.9$) for a nominal 10.2 cm (4 in) brick veneer.⁸¹ Testing has shown that wall assemblies finished with brick veneer have increased thermal performance due to the thermal mass of the veneer and the nominal 2.5 cm (1 in) air space required behind the veneer. Thermal performance differences among exterior wall finish alternatives are not accounted for.

6.9.8 End of Life

Demolition of brick walls at end of life is typically not done carefully. The walls are knocked down using equipment such as a wrecking ball or explosives, resulting in some loss of brick. It is estimated that approximately 75 % of brick may be recovered as whole, sound units, free from cracks and other defects that would interfere with their proper laying or use. Brick that are to be reused are required to meet the requirements for new brick units and be cleaned of old mortar before reuse. The mortar is removed by hand labor using chisels and hammers, typically at the demolition site. The cleaned brick is sold for new construction, and the mortar and broken brick are taken to landfills.

6.10 Generic Cedar Siding

Cedar wood is a popular exterior siding material because it is lightweight, low-density, and aesthetically-pleasing material and provides adequate weatherproofing.

6.10.1 Product Description

⁸¹ Units for R_{SI} and R_{US} are $^{\circ}\text{C}\cdot\text{m}^2\cdot\text{sec}/\text{J}$ and $^{\circ}\text{F}\cdot\text{ft}^2\cdot\text{s}/\text{BTU}$, respectively.

For the BEES system, beveled cedar siding with planks 1.27 cm (0.5 in) thick and 15.2 cm (6 in) wide and a 2.54 cm (1 in) overlap is modeled. The functional unit is 0.09 m² (1 ft²) of siding used on a building for 60 years. Cedar siding modeled for BEES has a mass of 0.432 kg (0.95 lb) and is installed with galvanized nails 41 cm (16 in) on center and finished with one coat of primer and two coats of paint. Paint is reapplied every fifteen years. Much of the data for this product is based on a recent LCA on Western Red Cedar siding. Primary data for the year 2015 were collected from cedar operations and siding manufacturing facilities in the U.S. Pacific Northwest and British Columbia, Canada.

6.10.2 Flow Diagram

The flow diagram in Figure 6-16 shows the major elements of the production of this product, as it is currently modeled for BEES.

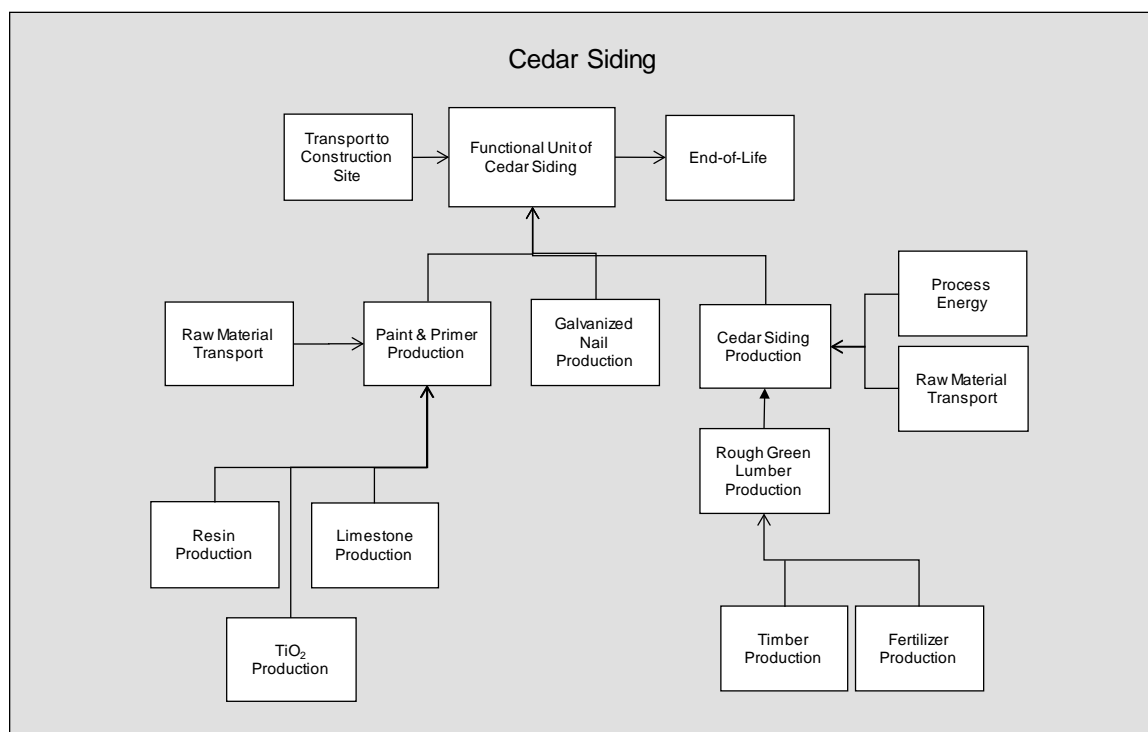


Figure 6-16 Cedar Siding System Boundaries

6.10.3 Raw Materials

Cedar siding production starts with growing and harvesting from forests. The data to produce roundwood include harvesting, nursery operations, and forest management (i.e., site preparation, planting, and management related activities, such as thinning). Roundwood production data are based on Table 4 in FPInnovations (2017). Next, the logs are sent to sawmills and planing mills where the logs are washed, debarked, and sawn into planks of rough green lumber. Data for this process comes from Table 7 in

FPIInnovations (2017). Energy use is based on the U.S. LCI database. Fertilizer and other ancillary materials, including lubricants and hydraulic fluids, come from ecoinvent.

It should be noted that the rough green lumber and its co-products, pulp chips and bark, are allocated on an economic basis; this approach is a change from the original Consortium for Research on Renewable Industrial Materials (CORRIM) work done (and on which the U.S. LCI database wood data are based). The mass allocation percentages have been adjusted to economic allocation using the guidance provided in PCRs for North American Structural and Architectural Wood products, and as a result, the green lumber takes approximately 95 % of the share of products and co-products – an adjustment from approximately 50 %.

BEES modeling accounts for the absorption of CO₂ for longer-life products. As trees grow, the carbon becomes part of the wood, and the oxygen is released to the atmosphere. The “uptake” of CO₂ in 929 cm² (1 ft²) installed product is approximately 0.82 kg (1.8 lb) of CO₂, based on a carbon content of 51.54 % for cedar (oven dry weight).

6.10.4 Manufacturing

At the cedar siding mill, the green lumber is edged, trimmed, dried in a kiln, and planed. Final trimmed lumber is packaged. Data to manufacture the siding come from Table 12 in FPIInnovations (2017). Like previous cedar related operations, data for energy comes from the U.S. LCI database and materials come from ecoinvent. Table 12 also provides the following average packaging for 1000 kg (2 205 lb) cedar siding: 0.02 kg (0.04 lb) plastic strapping from U.S. LCI database and 0.37 kg (0.82 lb) lumber wrap modeled as LDPE film from U.S. LCI database and ecoinvent, and 0.02 m³ (0.7 ft³) dunnage. These materials are modeled as landfilled after installation.

6.10.5 Transportation

Transportation of cedar siding to the building site is modeled using heavy-duty truck and rail, from Vancouver, Canada, to distribution centers in Seattle, WA, Minneapolis, MN, and New York, NY. Accounting for these locations, on average, the product is shipped approximately 2000 km (1410 mi) to the building site. The BEES user may change this default distance.

6.10.6 Installation

Cedar siding installation is predominately a manual process--a relatively small amount of energy may be required to operate compressors to power air guns, but this amount is assumed to be too small to warrant inclusion in the analysis. Cedar siding panels are attached using galvanized nails. Three nails are required per 0.09 m² (per ft²) of siding. Assuming standard 6d 5 cm (2 in) nails, installation requires 0.0054 kg (0.0119 lb) of nails per ft² of siding. No installation waste is assumed for the nails. After installation, the siding is first primed and then painted with two coats of paint. The primer and paint are

modeled as a solvent based paint modeled for BEES in the amount of 0.0175 kg (0.0079 lb) per 0.09 m² (1 ft²). Background data come from ecoinvent.

Installation waste with a mass fraction of 5 % is assumed, and it is assumed to go to landfill, modeled using wood disposal in a landfill from ecoinvent. While sheathing, weather resistive barriers, and other ancillary materials may be required to complete the exterior wall system, these materials are not included in the system boundaries for BEES exterior wall finishes.

6.10.7 Use

Cedar siding is modeled as having a useful life of over 60 years. Thus, one initial installation and use period is modeled for the BEES functional lifetime. It is modeled as being repainted with one coat of paint every fifteen years, for a total of three additional paint coatings over the course of 60 years. No other routine maintenance is required to prolong its lifetime, although cleaning is recommended to maintain appearance. Cleaning would normally be done with water and household cleaners. This data has not been modeled due to the broad range of cleaning practices and materials (e.g., frequency of cleaning, types and quantities of cleaning solutions used).

6.10.8 End of Life

At end of life, the BEES model assumes that 50 % of the siding is recovered and 50 % is landfilled. The portion that is landfilled is modeled as transported by diesel-fuel powered truck approximately 48 km (30 mi) to a landfill. Truck transportation is based on the U.S. LCI database, and disposal in a landfill is modeled based on ecoinvent end of life waste management process data for untreated wood. The mass that is not biobased (e.g., nails) is assumed to be inert material in a landfill. The rest of the mass is modeled as biogenic material disposed of in a landfill, and accounts for the CO₂ and methane (CH₄) emissions pertaining to the decomposing biomass. FPInnovations (2017) assumes, after a review of the recent scientific literature, that 10 % of the wood ultimately decomposes, so storage of the remaining biogenic carbon is also accounted for. (FPInnovations (2017), Sec. 5.2) Using data and assumptions on landfill gas collection systems in North America, including the percentage of landfills with capture equipment in place, average capture efficiency, and energy recovery values, cedar siding emissions due to wood decomposition in the landfill amount to 0.0284 kg (0.06 lb) CO₂ and 0.0036 kg (0.008 lb) CH₄ per 0.09 m² (one ft²). (FPInnovations (2017), Table 35 and Section 5.2).

6.11 Generic Polypropylene (PP) Siding

PP siding is used as an exterior wall finish on new and renovated construction. PP siding offers a thick durable profile that can mimic a wide variety of wood shingle and shake patterns. It is manufactured in a range of profiles, colors and thicknesses to meet different architectural and market applications. PP siding typically comes in panels of 3.66 m x 17.8 cm (12 ft x 7 in); as installed, 14.29 panels are used per 9.29 m² (100 ft²). The mass

of PP siding is 32.3 kg (71.3 lb) per 9.29 m² (100 ft²) for a typical 0.216 cm (0.085 in) thickness.

6.11.1 Product Description

For the BEES system, 0.216 cm (0.085 in) thick, 17.8 cm (7 in) wide horizontal PP siding installed with galvanized nail fasteners is studied. The nails are assumed to be placed 41 cm (16 in) on center.

Data described in this chapter and modeled for BEES are based on the VSI's LCA covering PP siding. Data are primary from North American facilities and manufacturers, collected for the year 2015. While siding is generally specified in terms of 'squares' of siding, or 9.29 m² (100 ft²), for BEES, the functional unit is 0.09 m² (1 ft²) of siding used over 60 years.

6.11.2 Flow Diagram

The flow diagram in Figure 6-17 presents the major elements of the production of this product as it is currently modeled for BEES.

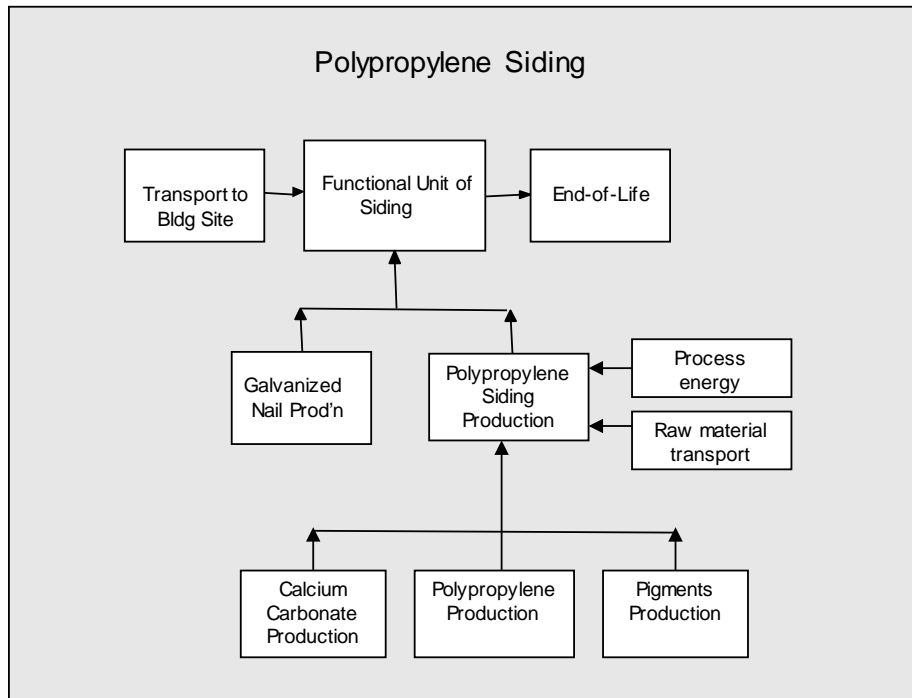


Figure 6-17 Polypropylene Siding System Boundaries

6.11.3 Raw Materials

PP siding components are presented in Table 6-31.

Table 6-31 Polypropylene Siding Constituents⁸²

<i>Constituent</i>	<i>% in Siding</i>
PP	85 %
Calcium carbonate (limestone)	12 %
Pigments	3.0 %
Total	100 %

The PP resin comes from the U.S. LCI database. Calcium carbonate is based onecoinvent customized to U.S. conditions. Pigments modeled include chromium- and antimony-based compounds (modeled as chromium and antimony from ecoinvent), and titanium dioxide from ecoinvent.

Transportation of the raw materials to siding facilities has been reported and averaged in Sustainable Solutions Corporation (2016) and is accounted for in BEES. Materials are transported an average of 37 kg-km (131 lb-mile) by truck and 1210 kg-km (4293 lb mile) by train.⁸³ Train and diesel-powered combination trucks are modeled based on the U.S. LCI database.

6.11.4 Manufacturing

As described in Sustainable Solutions Corporation (2016), “To produce PP siding, PP compound beads are melted and injected into molds derived from actual cedar shakes. The polymer cures into the shape from the mold. Various pigments can be added for color variations. PP siding manufacturing is an extremely efficient injection molding process requiring relatively low inputs of energy and water and the ability to immediately return scrap and off-specification materials (regrind) directly into the manufacturing process results in [minimal] manufacturing waste.”⁸⁴ Manufacturing energy and water use are presented in Table 6-32.

Table 6-32 Energy and Water Requirements for Polypropylene Siding⁸⁵

<i>Fuel Use</i>	<i>Quantity per kg Siding</i>
Electricity MJ (kWh)	5.76 (1.6)
Natural Gas m ³ (scf)	0.058 (2.06)
Propane l (gal)	1.3 E-4 (3.5 E-05)
Water Use l (gal)	1.49 (0.393)

The electricity is used for raw materials mixing, extrusion, machining, lighting, air compressors, cooling water pumps, grinding operations, and other miscellaneous equipment. The natural gas is used for space heating, and the propane is used in mobile

⁸² Sustainable Solutions Corporation (2016), Table 4.3.

⁸³ Sustainable Solutions Corporation (2016), Table 4.4

⁸⁴ Sustainable Solutions Corporation (2016), Section 4.3 A3. Manufacturing Process Overview

⁸⁵ Sustainable Solutions Corporation (2016), Table 4.5

equipment. Electricity production sources and the fuels production and combustion come from the U.S. LCI database. Water is used for process cooling, and to a small extent, cleaning and domestic use.

The amount of wastewater generated is 0.48 l (0.126 gal) per kg siding. The difference between the reported water in and out is mainly due to evaporation losses in the closed loop cooling water systems utilized by most of the plants. The BEES model includes treatment with water treatment chemicals so this water is assumed to be uncontaminated. A small quantity of inert waste, 5.6 E-3 kg per kg siding, is generated and landfilled, and 2.1 E-3 kg per kg siding is incinerated.

Packaging. Industry-average packaging data for this product were provided by Sustainable Solutions and include paper labels, plastic and metal strapping, LDPE wrap, cardboard, and wood pallets.

6.11.5 Transportation

The finished PP siding product is transported a weighted average distance of 1108 km (689 mi) by diesel truck to the building site. Nails used for installation are assumed to be transported 241 km (150 mi) by diesel truck to the building site. The BEES user may change the assumed transport distances for the main products.

6.11.6 Installation

Installation on the building is done primarily by manual labor. Nails or screws can be used to install the siding; nails are more common and would typically be the type installed with a gun. The energy required to operate compressors to power air guns is assumed to be small and is not included in the analysis. Installation is modeled for nails placed 41 cm (16 in) on center; nail use is 0.0024 kg (0.0053 lb) per 0.09 m^2 (per ft^2) of siding. Installation waste with a mass fraction of 5 % is assumed, and this waste is assumed to go to a landfill.

While sheathing, weather resistive barriers, and other ancillary materials may be required to complete the exterior wall system, these materials are not included in the system boundaries for BEES exterior wall finishes.

6.11.7 Use

PP siding has an assumed useful life of 60 years. No routine maintenance is required to prolong the lifetime of the product, although cleaning is recommended to maintain appearance. Cleaning would normally be done with water and household cleaners. Information on typical cleaning practices (e.g., frequency of cleaning, types and quantities of cleaning solutions used) was not available; maintenance was not included in the system boundaries.

6.11.8 End of Life

At end of life, the siding is removed and taken to be disposed of in a landfill. End of life modeling includes transportation of the siding and nails by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data.

7 Interior Wall and Ceiling Finish Categories

The interior wall and ceiling categories cover both residential and commercial finishing products.

7.1 Interior Wall and Ceiling Finish Types

There are a range of interior wall and ceiling finish types, but only one product type is currently included in the interior wall finish category, latex paint, as shown in Table 7-1. Conventional paints are generally classified into two basic categories: water-based (in which the solvent is water) and oil- or solvent-based (in which the solvent is an organic liquid, usually derived from petrochemicals). Paints essentially consist of a resin or binder, pigments, and a carrier in which these substances are dissolved or suspended. Once the paint is applied to a surface, the carrier evaporates, leaving behind a solid coating. In oil-based paints the carrier is a solvent consisting of VOCs, which can adversely affect indoor air quality and the environment. Due to increased government regulations and market demand, paint formulations have shifted away from oil-based paints to waterborne or latex paints since these paints emit far fewer VOCs upon application. Furthermore, the market for latex paint has increasingly shifted to low- and zero-VOC emissions formulations, drastically reducing the levels of VOCs emitted during and after application.

Table 7-1 Interior Wall and Ceiling Finish Types and Subtypes

Floor Covering	
Types	Subtypes
Latex Paint	Virgin
	Reprocessed
	Consolidated

7.2 Interior Wall Finish Characteristics and Certifications

BEES Online 2.0 has added a feature to filter/restrict products selected based on product characteristics, such as fraction recycled materials, and product certifications, such as USDA Certified Biobased. The current list of characteristics and certifications provided in BEES 2.0 are listed in Table 7-2.

Table 7-2 Exterior Wall and Ceiling Finish Characteristics and Certifications

Characteristics and Certifications	
Federal Agency Certifications	None
Standard Certification	None
NGO Certification	None
Characteristics	25 % Recycled Content
	35 % Recycled Content
	50 % Recycled Content
	75 % Recycled Content

7.3 Interior Wall and Ceiling Finish Installation, Service Life, and Use Phase

To evaluate the life cycle impacts of interior wall finishes, it is necessary to consider the installation and use phase impacts, both of which could vary depending on decisions outside the product manufacturer’s control. It is assumed there are no use phase impacts while installation impacts are incorporated into the products embodied impacts. The default assumed service life is defined for each BEES product in its associated documentation.

7.4 Generic Latex Paint

7.4.1 Product Description

BEES includes three neutral-colored, latex-based paint options for interior use: virgin latex paint and recycled content latex paint made by two distinct methods: consolidating and reprocessing (or remanufacturing). These latter paints contain leftover household paint, or PC paint. Consolidated paint facilities are often located at or near county or city recycling and Household Hazardous Waste (HHW) facilities. These facilities generally have relatively small-scale operations in which paint meeting a certain quality is blended and repackaged and sold or given away to the public. In larger consolidating operations, some virgin materials are added to the paint. Reprocessed paint is generally produced in a larger-scale facility and varies by producer and PC paint content; reprocessed paint can contain 50 % to over 90 % PC paint.

The three latex paint alternatives are applied the same way. The surface to be painted is first primed and then painted with two coats of paint. One coat of paint is then applied every 5 years. When considering specific products, quality could vary greatly, depending on specific formulations that will define performance, attributes, physical characteristics, etc. For BEES, however, these three paint options are assumed to be of the same quality, with one gal covering 37.2 m² (400 ft²). Density is modeled at 1.32 kg/l (11.0 lb/gal). For BEES, the functional unit is 0.09 m² (1 ft²) of paint coating used in a building for 60 years.

7.4.2 Flow Diagram

The flow diagrams in Figure 7-1 and Figure 7-2 presents the major elements of the production of this product as it is currently modeled for BEES.

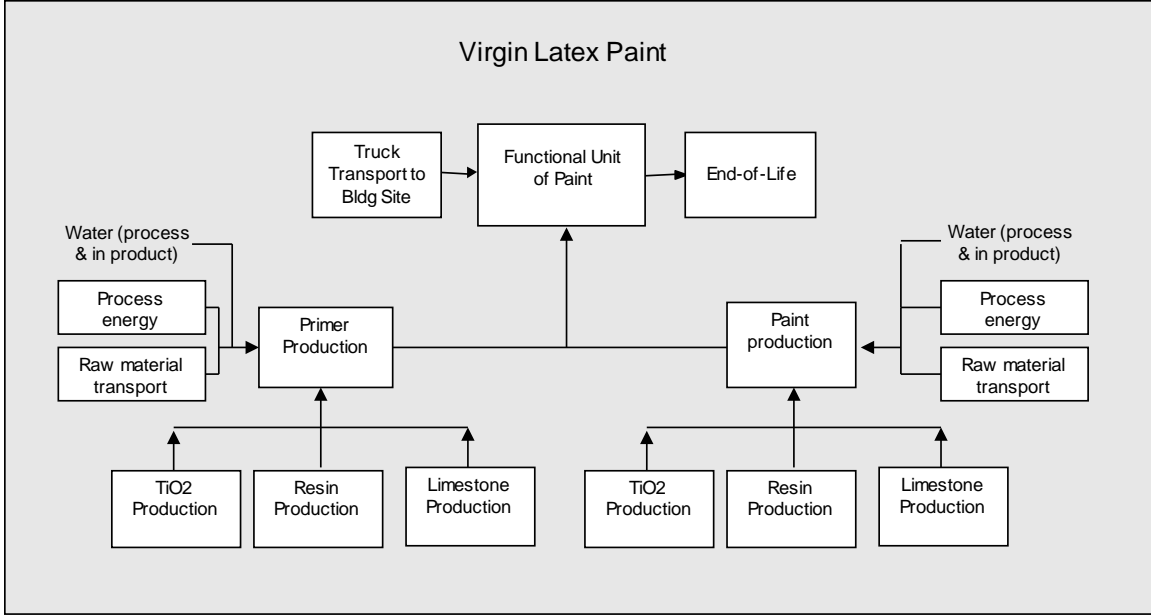


Figure 7-1 Generic Latex Paint System Boundaries

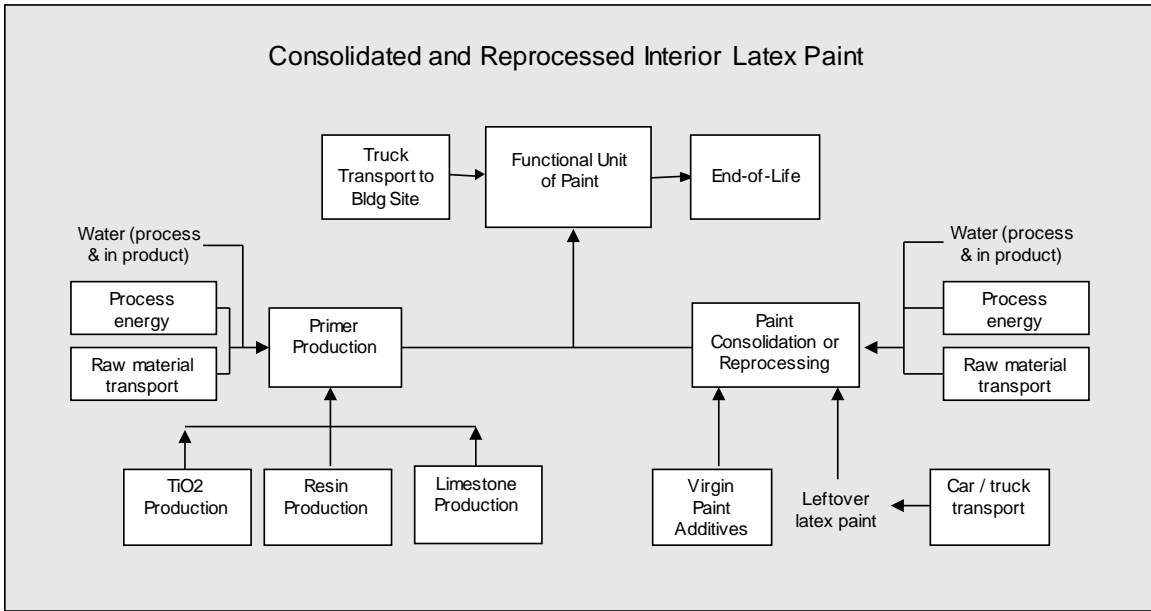


Figure 7-2 Generic Latex Paint System Boundaries

7.4.3 Raw Materials

Virgin latex paint. The major virgin latex paint constituents are binder (resins), pigments (titanium dioxide and other pigments), pigment extender and filler (calcium carbonate), and carrier (water, for latex paint). The binder is synthetic latex made from polyvinyl acetate and/or acrylic polymers and copolymers. Titanium dioxide is one of the primary pigments used and imparts hiding properties in white or light-colored paints. A range of pigment extenders may be added. Other additives include surfactants, defoamers, preservatives, and fungicides. Water has a coalescing agent – typically a glycol or glycol ether. The components are mixed together until they form an emulsion.

The average composition of the virgin latex paint/primer system modeled in BEES is provided in Table 7-3. These compositions are loosely based on data from published manufacturer-specific EPDs and manufacturers’ Safety Data Sheets (where ingredients are specified) on latex paint products. BEES users should note that even though BEES presents these very generic formulations, there is actually no such thing as an average paint, given the broad selection of binders, extenders, colorants, and other additives used in a multitude of combinations, depending on performance requirements, product line, intended use, and manufacturer. One might characterize the quantities presented in Table 7-3 as a generic formulation representing a medium-quality interior latex paint and primer.

Table 7-3 Virgin Latex Paint Constituents

<i>Constituent</i>	<i>Paint Mass Fraction (%)</i>	<i>Primer Mass Fraction (%)</i>
Resin (binder)	15	20
Titanium dioxide (pigment)	15	11
Calcium carbonate (limestone)	16	5
Other additives	4	4
Water	50	60

Calcium carbonate, or limestone, is the material used to represent the mineral-based extender pigments and fillers. Data for calcium carbonate and titanium dioxide come fromecoinvent. The resin binder is acrylic-based, and its composition may be a vinyl acrylic polymer, a polyvinyl acrylic polymer, or a styrene acrylic polymer. Table 7-4 presents the assumed market shares for these resin types as they are modeled in BEES.

Table 7-4 Latex Paint Resin Constituents

<i>Resin Type</i>	<i>Market Share (%)</i>
Vinyl acrylic	33.3 %
Polyvinyl acetate	33.3 %
Styrene acrylic	33.3 %

The vinyl acrylic impact is built using vinyl acetate, fromecoinvent, and butyl acrylate, a data set built using stoichiometry andecoinvent inputs. Polyvinyl acetate data comes

fromecoinvent (as vinyl acetate), and the styrene acrylic is modeled as styrene-acrylonitrile copolymer fromecoinvent. Often, a colorant is added at the retail store in varying amounts which depend on the desired color and qualities. Due to the range of possible materials and quantities, this colorant is not included in BEES.

Packaging has been included in the model; virgin latex paint is modeled as sold in one-gallon steel cans with an empty mass 0.11 kg/liter (0.9 lb/gal).

Consolidated paint. The consolidated paint in BEES is assumed to have a PC paint content of 98.5 %, with the remaining constituents being virgin-based. This ratio is based on an LCA study on leftover paint waste management that surveyed paint consolidation plants located throughout the U.S. (Paint Product Stewardship Initiative, 2006). At 1.32 kg/l (11.0 lb/gal), this rate amounts to 0.019 kg/l (0.17 lb/gal) of virgin additives, which are modeled as the paint constituents described above. Consolidated paint is packaged (i.e., repackaged) in a 19 l (5 gal) high density polyethylene (HDPE) plastic bucket having an empty mass of 1.13 kg. Data for HDPE comes from the U.S. LCI database.

Reprocessed paint. The leftover paint waste management study also surveyed paint reprocessing plants. Based on this survey, PC paint content ranged from 55 % to 93 %, with a weighted average of 76 %. Therefore, the quantity of virgin constituents was modeled as 24 %, amounting to 0.32 kg/l (2.64 lb/gal) of virgin additives per gal of reprocessed paint, at the assumed density of 1.32 kg/l (11.0 lb/gal). Reprocessed paint is modeled as packaged in 19 l (5 gal) HDPE plastic buckets and 3.8 l (1 gal) steel containers (assuming a 50/50 share for these).

7.4.4 Manufacturing

Virgin latex paint. Paint manufacture consists of combining the ingredients, less some of the solvent, in a steel mixing vessel. In some cases, the mixing is followed by a grinding operation to break up the dry ingredients, which tend to clump during mixing. Then, additional solvents or other liquids are added to achieve final viscosity, and supplemental tinting is added. Finally, the paint is strained, put into steel cans, and packaged for shipping.

The energy to blend and package virgin latex paint and the paint primer is modeled to be 0.084 kWh/l (0.32 kWh/gal) of purchased electricity, plus 5.85 MJ/l (22.2 MJ/gal) of additional energy. In the absence of data on the source of the additional energy required, it is assumed to be natural gas.

Raw materials are modeled as being transported to the paint manufacturing site by truck. Since no site-specific data have been used for BEES, the default transportation distances in the architectural coatings PCR have been implemented. These distances are to 1207 km (750 mi) for the raw materials in the paint and 1500 km (932 mi) for the steel paint cans.

Consolidated latex paint. Before PC paint undergoes consolidation, it is sorted from solvent based paints, contaminated paint, and other HHW materials that come to an

HHW facility. Once the paint in good condition is separated from other types of paint and HHW, the paint cans are opened manually or electrically and paint is poured into a mixing vessel. The cans are sometimes crushed using electrical equipment. Water is often used to clean facilities, as are absorbents to soak up paint from the floor. Waste is minimized as often the emptied containers are recycled. Table 7-5 provides consolidation plant sorting inputs and outputs.

Table 7-5 Consolidated Paint Sorting Data

<i>Flow</i>	<i>Units</i>	<i>Amount</i>
Inputs		
Water used	L/L (gal/gal)	0.22 (0.22)
Absorbent used to absorb paint on floor	kg/L (lb/gal)	0.0002 (0.002)
Electricity	J/L (kwh/gal)	31 0227 (0.327)
Natural gas process fuel	m3/L (ft3/gal)	0.0001 (0.010)
Diesel fuel (mobile equipment)	L/L (gal/gal)	0.0009 (0.0009)
Natural gas (mobile equipment)	L/L (gal/gal)	0.0003 (0.0003)
Propane (mobile equipment)	L/L (gal/gal)	0.005 (0.005)
Gasoline (mobile equipment)	L/L (gal/gal)	0.0002 (0.0002)
used oil	L/L (gal/gal)	0.001 (0.001)
Outputs		
Waste	kg/L (lb/gal)	0.102 (0.850)

Next, the paint is blended and repackaged. Table 7-6 provides the consolidation process energy and water requirements.

Table 7-6 Consolidated Paint Processing Data

<i>Flow</i>	<i>Units</i>	<i>Amount</i>
Water used	L/L (gal/gal)	0.07 (0.07)
Electricity	J/L (kwh/gal)	55 092 (0.058)
Natural gas process fuel	m3/L (ft3/gal)	0.00001 (0.002)
Diesel fuel (mobile equipment)	L/L (gal/gal)	0.002 (0.002)
Propane (mobile equipment)	L/L (gal/gal)	0.007 (0.007)

The absorbent used to soak up paint from the facility floor is reported as cat litter, which is modeled as clay. All data on energy use and combustion in mobile equipment and boilers comes from the U.S. LCI Database.

It is assumed that 90 % of the paint comes to a consolidation plant by truck from a HHW facility or a municipal solid waste transfer station. The remaining incoming paint comes directly from households via passenger vehicle. Based on the surveys, truck transportation is on average 161 km (100 mi) and car transport is on average 15 km (9.4 mi). The passenger vehicle mileage has been allocated to one-fourth its amount to account for the mass of other HHW drop-off items likely transported in the car plus driving for other errands during the same trip. The passenger vehicle is modeled as 50 %

gasoline-powered car and 50 % sport utility vehicle, and these data come fromecoinvent. Truck transportation data comes from the U.S. LCI database.

Reprocessed latex paint. As with consolidated paint, before paint is reprocessed it must be sorted from other incoming materials. Once the PC latex paint appropriate for reprocessing has been sorted from other paints and materials, it is blended with virgin materials and packaged for sale. Table 7-7 provides the inputs and outputs from sorting and reprocessing.

Table 7-7 Reprocessed Paint Sorting and Processing Data

<i>Flow</i>	<i>Quantity per l (per gal)</i>
Inputs:	
Water used	0.565 l (0.565 gal)
Electricity	0.425 MJ (0.447 kWh)
Propane (mobile equipment)	0.0023 l (0.0023 gal)
Gasoline (mobile equipment)	0.0009 l (0.0009 gal)
Outputs:	
Waste	0.0083 kg (0.07 lb)

Paint reprocessing facilities mostly receive leftover paint via truck from collection sites including HHW facilities. Because there are fewer reprocessing facilities, trucks travel on average a greater distance than to consolidation facilities; this distance is about 885 km (550 mi) according to the leftover paint study.

7.4.5 Transportation

Virgin and reprocessed latex paint. Since precise data on transporting finished paint products is not available, the default transportation distances to the consumer in the architectural coatings PCR have been implemented. These distances are 402 km (250 mi) to the distribution center and 805 km (500 mi) from the distribution center to the point of sale. Transportation via heavy-duty truck is modeled as a variable of the BEES system so the BEES user may adjust the transportation distance.

Consolidated paint. Transportation of the consolidated paint, assumed to be purchased by local users, is accomplished by gasoline-powered car and sport utility vehicle, typically traveling a much shorter distance due to the high number of local paint consolidation facilities and markets.

7.4.6 Installation

At the beginning of the 60-year BEES use period, one coat of primer is applied under the two coats of paint. According to the architectural coatings PCR, 10 % of the wet mass of the coating remains unused and is disposed of properly, which entails drying the paint and putting it into the municipal solid waste; in this case, it is modeled as going to a landfill. Painters and consumers may also take advantage of a leftover paint management program, such as PaintCare®, a program of the American Coatings Association that

operates paint stewardship programs on behalf of paint manufacturers in states that have passed paint stewardship laws.⁸⁶ For BEES, 90 % of the unused paint is assumed to go to landfill and 10 % is assumed to go to a paint recycler or consolidator.

7.4.7 Use

Every five years, the wall is assumed to be painted over with one additional coat, amounting to 11 additional coats over the 60-year use period. These replacements are accounted for in the model. Virgin latex paint is modeled as having a VOC content of 100 g/l, considering the low- and zero-VOC paints on the market (light colors, less sheen), and paints with higher VOC content due to higher sheen ingredients, colorants, or other additives containing solvents that would release VOCs during drying. The consolidated and reprocessed paints are assumed to have an average VOC content of 250 g/l, the limit set by Green Seal GS-43 (Green Seal, 2011b).

7.4.8 End of Life

At end of life, all the paint goes into a landfill with the wall on which it is applied. End-of-life modeling includes transportation of the decommissioned walls by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data.

⁸⁶ For more information, refer to: <https://www.paintcare.org/about/#/overview?paintcare-inc>.

8 Exterior Wall and Ceiling Insulation Category

The exterior wall and ceiling insulation categories cover both residential and commercial applications.

8.1 Exterior Wall and Ceiling Insulation Types and Functional Unit

There are a range of interior wall and ceiling insulation types included in Table 8-1. Use of insulation impacts a building's thermal performance and environmental impacts. The current functional unit is one unit of thermal resistance (R-value) for 1 ft² of area covered over the 60-year study period. The BEES results *currently* use R-value in metric units (R_{SI}), which is in units of °C-m²-sec/J. The R-value in U.S. units (R_{US}), or better known in the United States as simply “R-value,” is in units of °F-ft²-s/Btu. The R-value is a factor of ~5.68 times greater than R_{SI}.

Insulation is more complex than other BEES products because thermal resistance and associated LCIA results vary by thickness and application for insulation. LCIA results do not increase linearly as R-value increases, which makes it difficult to use one multiplier to scale the results to a desired R-value. For example, the LCIA results for 1 ft² of 3.5 in R_{US}-13 fiberglass batt insulation cannot be calculated by taking the LCIA results for R_{SI}-1 and multiplying by 13 / 5.68. Therefore, **it is currently recommended that a BEES user NOT use the “quantity” option and the associated “total” LCIA results for any decision-making for insulation products.**

To evaluate the insulation products based on actual R-values installed, the insulation products in BEES Online 2.0 will be updated from R_{SI}-1 (R_{US}-5.68) to installed R-values. These will be added to BEES in 2019. The insulation product options will be added to Table 8-1 once they are finalized, which will cover the most common product options and building code insulation requirements.

Table 8-1 Interior Wall and Ceiling Insulation Types, Subtypes, and Function Unit Conversion

Types	Subtypes	Wall and Ceiling Insulation	
		Current Option	Upcoming R-Value Options
Mineral	Loose Fill	R _{SI} -1	TBD
	Board	R _{SI} -1	TBD
Cellulose	Blown-In – Wall	R _{SI} -1	TBD
	Blown-In – Ceiling	R _{SI} -1	TBD
Fiberglass	Batt – Wall	R _{SI} -1	TBD
	Batt – Ceiling	R _{SI} -1	TBD
	Loose Fill	R _{SI} -1	TBD

Unit: R_{SI}-1 = R_{US}-5.67826
 Conversion Factor (R_{US} to R_{SI}) = 1 / 5.67826 = 0.1761

By controlling for the thermal performance, BEES provides results that are reasonable approximations for the relative environmental impacts across insulation types for given R-values. However, it is important to note that BEES results do not account for framing factor or thermal bridging, which would require whole building energy modeling of the entire assembly. For assembly and building-level LCIA results, see Athena Impact Estimator for Buildings (IE4B) and NIST’s Building Industry Reporting and Design for Sustainable Buildings Neutral Environment Software Tool (BIRDS NEST).

8.2 Exterior Wall and Ceiling Insulation Characteristics and Certifications

BEES Online 2.0 has added a feature to filter/restrict products selected based on product characteristics, such as fraction recycled materials, and product certifications, such as USDA Certified Biobased. The R-value specific insulation products that are currently under development will introduce R-value as a characteristic. The current and upcoming list of characteristics and certifications provided in BEES 2.0 are listed in Table 8-2.

Table 8-2 Exterior Wall and Ceiling Insulation Characteristics and Certifications

Characteristics and Certifications	
Federal Agency Certifications	None
Standard Certification	None
NGO Certification	None
Characteristic – Recycled Content	25 %, 35 %, 50 %, 75 %
Characteristic – R-Value	TBD

8.3 Exterior Wall and Ceiling Insulation Installation, Service Life, and Use Phase

To evaluate the life cycle impacts of exterior wall and ceiling insulation, it is necessary to consider the installation and use phase impacts, both of which could vary depending on

decisions outside the product manufacturer’s control. It is assumed there are no use phase impacts while installation impacts are incorporated into the products embodied impacts. The default assumed service life is defined for each BEES product in its associated documentation.

8.4 Generic Mineral Wool Insulation

Mineral wool insulation is made by spinning fibers from natural rock like diabase or basalt (rock wool) or iron ore blast furnace slag (slag wool). Rock wool and slag wool are manufactured by melting the constituent raw materials in a cupola. A molten stream is created and poured onto a rapidly spinning wheel or wheels. The viscous molten material adheres to the wheels and the centrifugal force throws droplets of melt away from the wheels, forming fibers. For loose fill insulation, the resulting fibers are processed into the final unbonded product and packaged. For mineral wool board, a binder is used to stabilize the fibers. The material is heated to cure the binder and stabilize the material and is then cooled. The blankets are cut to size and packaged.

8.4.1 Product Description

BEES includes unfaced, light density mineral wool board and loose fill mineral wool. The insulation products in BEES are based on the thermal resistance $R_{SI} = 1$ ($R_{US}=5.68$) over the 60-year study period.⁸⁷ The mass of mineral wool insulation per functional unit is shown in Table 8-3 and Table 8-4.

Table 8-3 Mineral Wool Board Insulation by Application⁸⁸

<i>Application</i>	<i>Mass per R=1 Functional Unit kg/m² (lb/ft²)</i>
Wall	1.7 (0.35)
Ceiling	

Note: $R_{SI}-1 = R_{US}-5.68$

Table 8-4 Loose Fill Mineral Wool Insulation by Application⁸⁹

<i>Application</i>	<i>Mass per R=1 Functional Unit kg/m² (lb/ft²)</i>
Wall	1.1 (0.23)
Ceiling	

Note: $R_{SI}-1 = R_{US}-5.68$

⁸⁷ Units for R_{SI} and R_{US} are °C-m²-sec/J and °F-ft²-s/BTU, respectively.

⁸⁸ NAIMA (2013a)

⁸⁹ NAIMA (2013b)

8.4.2 Flow Diagram

The flow diagrams in Figure 8-1 and Figure 8-2 presents the major elements of the production of this product as it is currently modeled for BEES.

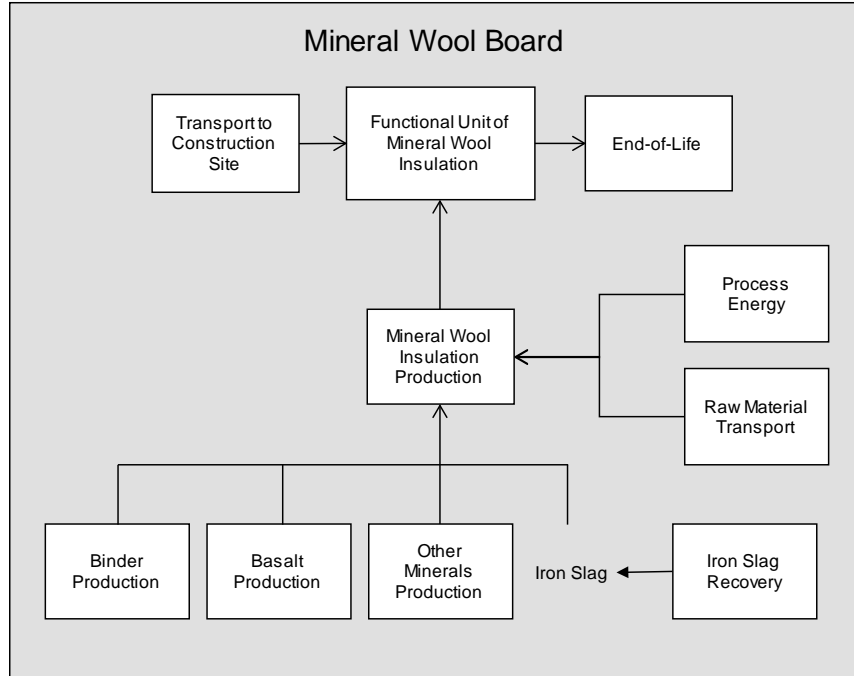


Figure 8-1 Mineral Wool Board Insulation System Boundaries

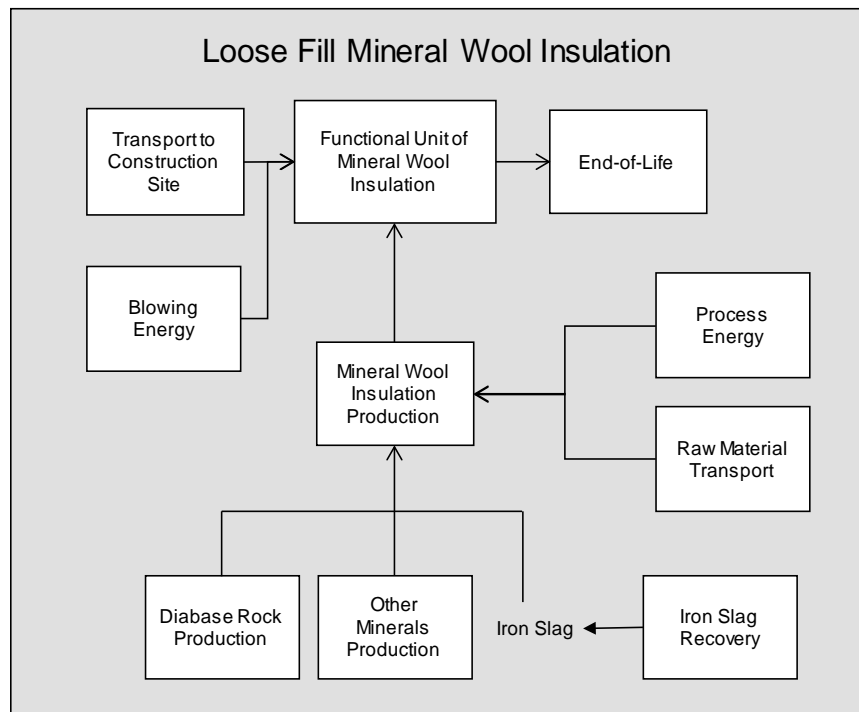


Figure 8-2 Loose Fill Mineral Wool Insulation System Boundaries

8.4.3 Raw Materials

The BEES models for these products represent an industry average mix of the different types of mineral wool insulation used in North America, given in Table 8-5 and Table 8-6. The North American Insulation Manufacturers Association (NAIMA) EPDs provide the detailed material content data.⁹⁰

Table 8-5 Mineral Wool Board Insulation Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
<i>Mineral Wool Batch</i>	
Slag	62.0
Basalt	25.0
Feldspar	7.0
Cement	1.0
Granite	0.4
Iron Ore	0.4
<i>Binder</i>	
Phenolic resin	2.0
Urea	2.0
Other	0.2
Total	100.0

Table 8-6 Loose Fill Mineral Wool Insulation Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Slag	86.5
Bauxite	6.2
Granite	4.1
Feldspar	2.9
De-dusting agent	0.3
Total	100.0

Data for most of the materials come from ecoinvent. The feldspar data set is used as a proxy for granite. Except for its transportation to the manufacturing plant, slag is modeled as an input that is free of environmental burdens since it is a byproduct of iron production. The de-dusting agent, modeled as ethylene glycol, comes from the U.S. LCI database. The Portland cement data come from PCA’s U.S. industry-average data (PCA, 2016a).

8.4.4 Manufacturing

Energy and water use. The energy requirements for melting the product constituents into fibers and drying of the fibers involve energy for heat and electrical energy. Energy use at manufacturing was based on Primary Energy results for the Production stage in the NAIMA EPDs. Natural gas and electricity were assumed to be the energy sources. The

⁹⁰ Table 1 in NAIMA (2013a) and NAIMA (2013b).

industry average process water used during production is also reported in Table 4 of the EPDs and included in BEES: 0.45 L/ m² for loose fill insulation and 0.87 L/m² for light density insulation board.

Transportation. The raw materials are transported to the manufacturing plant via diesel truck. Materials are sourced domestically, and transportation distances range on average from 161 km (100 mi) to 805 km (500 mi).

Waste. Much of the waste produced during the production process is either recycled into other insulation materials or added back into the melt. Some non-hazardous waste quantities are generated during production; this data comes from Table 4 of each respective EPD: 0.36 kg/m² (0.07 lb/ft²) for loose fill and 0.91 kg/m² (0.19 lb/ft²) for light density board.

8.4.5 Transportation

Transportation of the insulation to the building site is modeled as an assumed average of 805 km (500 mi) by heavy-duty diesel-fueled truck based on the U.S. LCI database. The BEES user can revise this distance if customization is necessary.

8.4.6 Installation

Installing mineral wool board is primarily a manual process so no energy is included here. The board is modeled as having a 3 % scrap rate. According to the NAIMA 2013 EPD, four 3.85 cm (1.5 in) fasteners per m² (~9.3 per 100 ft²) are used and these fasteners are included in the analysis. Blowing machines are used to install loose fill insulation. These machines can vary greatly in power and insulation throughput, based on their size, performance specifications, etc. For BEES, a 18 kW (25 hp) diesel engine is used to blow 930 kg (2050 lb) of mineral wool insulation. During the installation of loose fill insulation, any additional material is added into the building shell where the insulation is installed - there is effectively no installation waste.

Mineral wool insulation has a functional lifetime of over 60 years so no replacement is needed during the 60 year study period.

8.4.7 Use

While not accounted for in BEES, it is important to consider thermal performance differences when assessing environmental and economic performance for insulation product alternatives. Thermal performance affects building heating and cooling loads, which in turn affect energy-related LCA inventory flows and building energy costs over the 60-year use stage.

8.4.8 End of Life

At end of life, it is assumed that the insulation is disposed of in a landfill. End-of-life modeling includes transportation by heavy-duty diesel-fuel powered truck approximately

80 km (50 mi) to a construction & demolition landfill. Insulation in a landfill is modeled based on ecoinvent end-of-life waste management process data.

8.5 Generic Cellulose Insulation

Blown cellulose insulation is produced primarily from PC wood pulp (newspapers), typically accounting for roughly 85 % of the insulation by weight. Cellulose insulation is treated with fire retardant; ammonium sulfate, borates, and boric acid are used most commonly and account for the other 15 % of the cellulose insulation by weight.

8.5.1 Product Description

The cellulose insulation product in BEES is a conventional blown cellulose. Two additional categories that may be added to BEES in the future include stabilized cellulose, into which a starch-based adhesive is added to minimize product settling, and spray-applied cellulose into commercial buildings.

The insulation products in BEES are based on the thermal resistance $R_{SI} = 1$ ($R_{US}=5.68$) over the 60-year study period.⁹¹ The mass of cellulose insulation per functional unit is shown in Table 8-7.

Table 8-7 Blown Cellulose Insulation by Application

<i>Application</i>	<i>Mass per R=1 Functional Unit kg/m² (lb/ft²)</i>	<i>Scaling Factor</i>
Wall (dense pack)	2.25 (0.46)	2.3 for R _{US} -13
Ceiling	1.03 (0.21)	6.7 for R _{US} -38

8.5.2 Flow Diagram

The flow diagram in Figure 8-3 presents the major elements of the production of this product as it is currently modeled for BEES.

⁹¹ Units for R_{SI} and R_{US} are °C-m²-sec/J and °F-ft²-s/BTU, respectively.

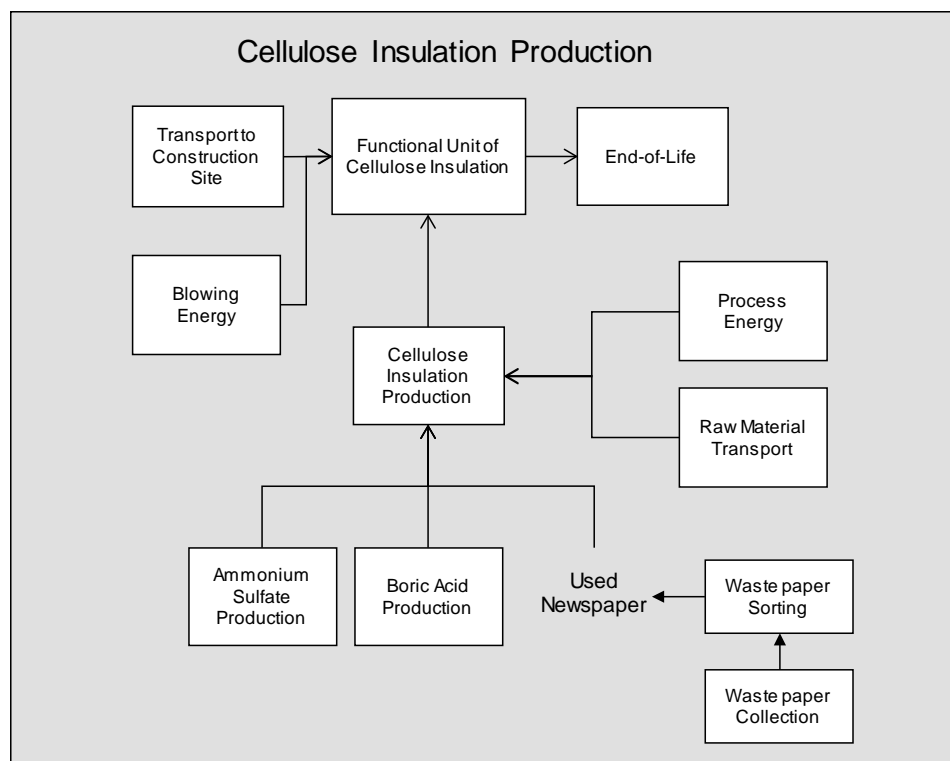


Figure 8-3 Cellulose Insulation System Boundaries

8.5.3 Raw Materials

Cellulose insulation is essentially shredded recovered wastepaper that is coated with fire retardants. The mass fraction of these materials is provided in Table 8-8. The relative proportions of fire retardants vary among manufacturers; an ammonium sulfate and boric acid mix of 70 % and 30 %, respectively, was modeled in BEES as that mix could be considered characteristic for this use.

Table 8-8 Cellulose Insulation Constituents

<i>Constituent</i>	<i>Mass Fraction (%)</i>
Recovered newspaper	85
Ammonium sulfate	10.5
Boric acid	4.5

Production of the newspaper is not included in the model since it is a recovered product, but the operations around recovering it are, which include wastepaper collection, sorting, and subsequent transportation to the insulation manufacturer. Ammonium sulfate is assumed to be a co-product of nylon (caprolactam) production. The boric acid flame retardant is assumed to be produced from borax. Data for both materials come fromecoinvent.

8.5.4 Manufacturing

Energy Requirements and Emissions. The manufacturing process includes shredding the wastepaper and blending it with the different fire retardants. Manufacturing energy is assumed to be purchased electricity in the amount of 0.35 MJ/kg (150 Btu/lb). There are no wastes or water effluents from the process of manufacturing cellulose insulation.

Transportation. The recovered newspaper is assumed to be shipped 161 km (100 mi) to the manufacturing plant via diesel truck. Other materials are assumed shipped by truck an average of 805 km (500 mi).

Waste. All waste produced during the production process is recycled back into other insulation materials. Therefore, minimal solid waste is generated during the production process.

8.5.5 Transportation

Transportation distance of the insulation to the building site is modeled to be an assumed average of 483 km (300 mi) by heavy-duty diesel-fueled truck, since cellulose insulation is produced regionally. Still, a BEES user can change this distance should customization be desired.

8.5.6 Installation

Blowing machines to install loose insulation can vary greatly in power and insulation throughput, based on their size, performance specifications, etc. For BEES, a 18 kW (25 hp) diesel engine is used to blow 1520 kg (3350 lb) of cellulose insulation. During the installation of loose fill insulation, any waste material is added into the building shell where the insulation is installed - there is effectively no installation waste.

8.5.7 Use

Cellulose insulation has a functional lifetime of over 60 years so no replacement is needed during the 60-year study period. While not accounted for in BEES, it is important to consider thermal performance differences when assessing environmental and economic performance for insulation product alternatives. Thermal performance affects building heating and cooling loads, which in turn affect energy-related LCA inventory flows and building energy costs over the 60-year use stage. Since alternatives for ceiling and wall insulation are all evaluated using the same thermal resistance value, thermal performance differences are not a significant issue here but the scaling should be accounted for.

8.5.8 End of Life

While cellulose insulation may be recyclable, it is assumed that all of the insulation is disposed of in a landfill at end-of-life. End-of-life modeling includes transportation approximately 80 km (50 mi) to a landfill. Cellulose insulation in a landfill is modeled

usingecoinvent’s data set on disposal of newspaper in a landfill, which accounts for partial decomposition of paper.

8.6 Generic Fiberglass Insulation

Fiberglass blanket, or batt, insulation is made by forming spun-glass fibers into batts. At an insulation plant, the product feedstock is weighed and sent to a melting furnace. The raw materials are melted in a furnace at very high temperatures. Streams of the resulting vitreous melt are either spun into fibers after falling onto rapidly rotating flywheels or drawn through tiny holes in rapidly rotating spinners. This process shapes the melt into fibers. Glass coatings are added to the fibers that are then collected on conveyers. The structure and density of the product is continually controlled by the conveyer speed and height as it passes through a curing oven. The cured product is then sawn or cut to the required size, such as for a batt. Off-cuts and other scrap material are recycled back into the production process.

8.6.1 Product Description

For BEES, the fiberglass batt is modeled with a facing paper. Blown fiberglass insulation, also called loose fill fiberglass insulation, is made by forming spun-glass fibers using the same method as for batts but leaving the insulation loose and unbonded.

The insulation products in BEES are based on the thermal resistance $R_{SI} = 1$ ($R_{US}=5.68$) over the 60-year study period.⁹² The mass of fiberglass insulation per functional unit is shown in Table 8-9 and Table 8-10.

Table 8-9 Fiberglass Batt Insulation by Application⁹³

<i>Application</i>	<i>Mass per R=1 Functional Unit kg/m² (lb/ft²)</i>	<i>Scaling Factor</i>
Wall	0.44 (0.09)	3 for R_{US} -13, plus facing
Ceiling		7 for R_{US} -38, plus facing

Table 8-10 Loose Fill Fiberglass Insulation by Application⁹⁴

<i>Application</i>	<i>Mass per R=1 Functional Unit kg/m² (lb/ft²)</i>	<i>Scaling Factor</i>
Ceiling	0.60 (0.12)	4.52 for R_{US} -38

⁹² Units for R_{SI} and R_{US} are °C-m²-sec/J and °F-ft²-s/BTU, respectively.

⁹³ Quantity per functional unit based on data provided in Owens Corning (2013a) and CertainTeed (2013).

⁹⁴ Quantity per functional unit from Owens Corning (2013b)

8.6.2 Flow Diagram

The flow diagrams in Figure 8-4 and Figure 8-5 presents the major elements of the production of this product as it is currently modeled for BEES.

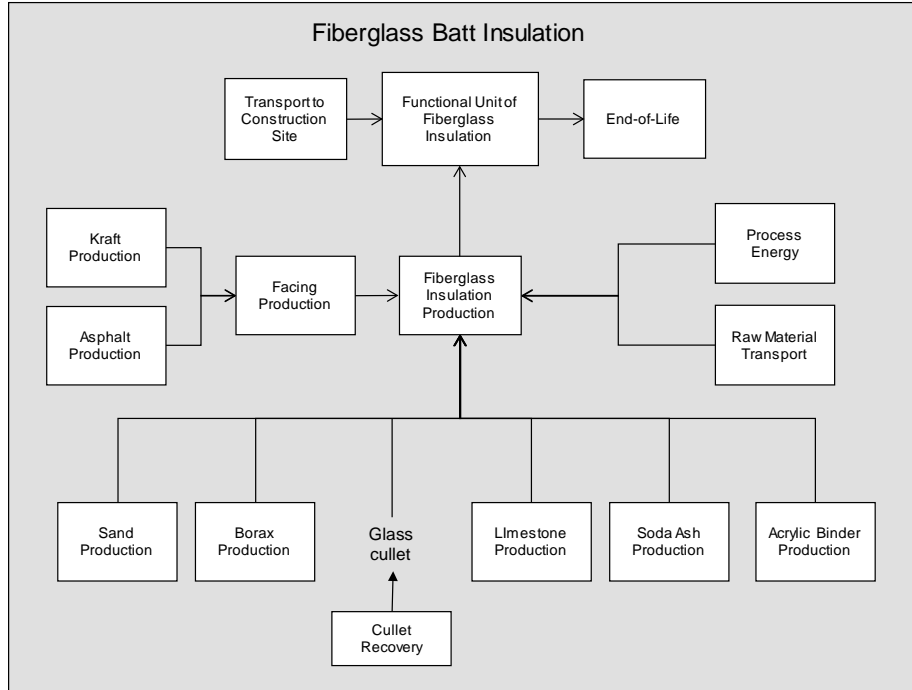


Figure 8-4 Fiberglass Batt Insulation System Boundaries

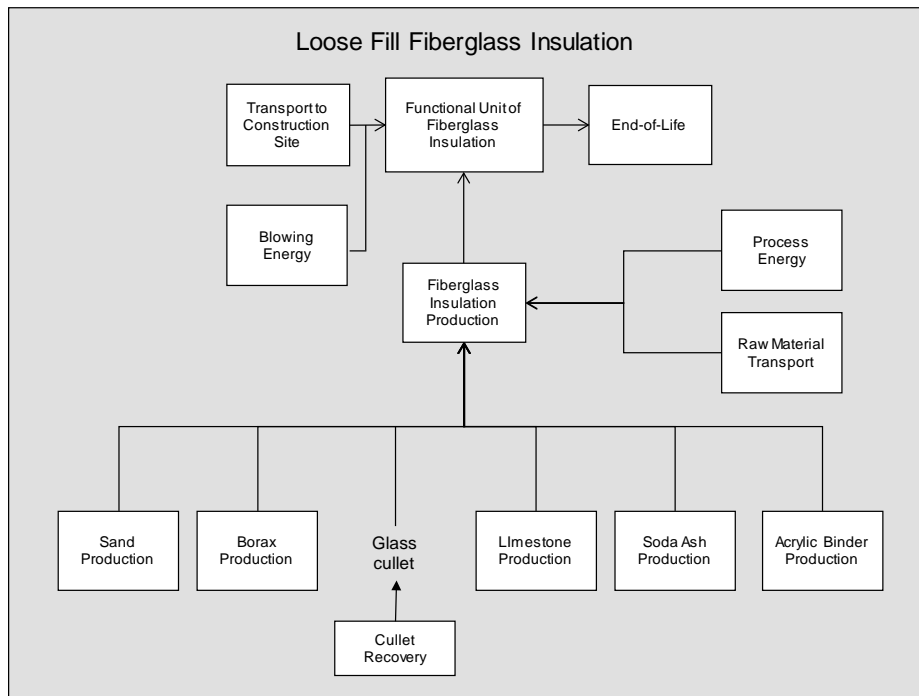


Figure 8-5 Loose Fill Fiberglass Insulation System Boundaries

8.6.3 Raw Materials

Fiberglass insulation is made with a blend of sand, limestone, soda ash, borax, cullet, and coatings materials. The cullet, or recycled window, automotive, or bottle glass, can account for well beyond 50 % by mass of the raw material input in some products on the market. Glass cullet use could be limited, however, as its use is dependent on availability in the market, and not all glass cullet is of sufficient quality to be used in the glass fiber manufacturing process. Nevertheless, the use of recycled material has helped to steadily reduce the energy required to produce fiberglass insulation products. The raw materials used to produce fiberglass insulation are shown in Table 8-11. These mass fractions are based loosely on ranges of percentages of raw materials data from Owens Corning and CertainTeed published EPDs. These data are not meant to represent any one product on the market.

Table 8-11 Fiberglass Insulation Constituents

<i>Constituent</i>	<i>Batt</i>	<i>Loose Fill</i>
<i>Glass constituent</i>	<i>Mass Fraction (%)</i>	<i>Mass Fraction (%)</i>
<i>Soda Ash</i>	9	9
<i>Borax</i>	12	17
<i>Glass Cullet</i>	38	38
<i>Quicklime</i>	9	5
<i>Binder Coatings</i>	5	<1
<i>Sand</i>	27	27
<i>Feldspar</i>	0	4
<i>Total</i>	100	100
<i>Facing</i>		
<i>Kraft paper</i>	25	
<i>Asphalt</i>	75	
<i>Total</i>	100	

The production data for the soda ash and lime come from the U.S. LCI database. The borax, glass cullet (collection), silica sand, and feldspar come from ecoinvent. For the facing, Kraft paper comes from ecoinvent and the asphalt comes from U.S. LCI database. The binder for fiberglass insulation was traditionally phenol formaldehyde resin but due to indoor air quality issues, this binder has been replaced with other materials. For BEES, the binder has been modeled as an acrylic binder, based on data from ecoinvent.

8.6.4 Manufacturing

Energy Requirements and Emissions. The energy requirements for melting the glass constituents into fibers and drying of the completed batt involve the use of electricity and other energy for heat - assumed to be natural gas. Overall energy use was estimated using guidance from the Primary Energy results for Plant Operations in the Owens Corning EPDs. Natural gas and electricity were the assumed energy sources. The manufacturing process generates air emissions from the combustion of the fuels used to melt the raw materials and from the drying of the insulation material prior to cutting and packaging.

Data for natural gas production and combustion into heat, and electricity are based on the U.S. LCI database.

Transportation. The raw materials are transported to the manufacturing plant via diesel truck. Materials are sourced domestically, and transportation distances range on average from 161 km (100 mi) to 805 km (500 mi).

Waste. Much of the waste produced during the cutting and blending process is either recycled into other insulation materials or added back into the glass mix.

8.6.5 Transportation

Transportation of the insulation to the building site is modeled as an assumed average of 805 km (500 mi) by heavy-duty diesel-fueled truck based on the U.S. LCI database. The BEES user can revise this distance if customization is desired.

8.6.6 Installation

Installing batt insulation is primarily a manual process; no energy or emissions are included in the model. A blowing machine is used to blow loose insulation into the ceiling space. Blowing machines can vary greatly in power and insulation throughput, based on their size, performance specifications, etc. For BEES, an 18 kW (25 hp) diesel engine is used to blow 612 kg (1350 lb) of loose fiberglass insulation. During the installation of the loose fill and batt, any waste material or scrap can be added into the building shell where the insulation is installed so there is effectively no installation waste.

Fiberglass insulation has a functional lifetime of more than 60 years – there is no need to replace or maintain the insulation during normal building use.

8.6.7 Use

While not accounted for in BEES, it is important to consider thermal performance differences when assessing environmental and economic performance for insulation product alternatives. Thermal performance affects building heating and cooling loads, which in turn affect energy-related LCA inventory flows and building energy costs over the 60-year use stage.

8.6.8 End of Life

At end of life, it is assumed that the insulation is disposed of in a landfill. End-of-life modeling includes transportation by heavy-duty diesel-fuel powered truck approximately 80 km (50 mi) to a construction & demolition landfill. Insulation in a landfill is modeled based on ecoinvent end-of-life waste management process data.

9 Partitions Category

The partitions category covers both residential and commercial products.

9.1 Partition Types

There are two partition types included in Table 9-1.

Table 9-1 Interior Wall and Ceiling Finish Types and Subtypes

Wall and Ceiling Insulation	
Types	Subtypes
Gypsum	Board
	X Board

9.2 Partition Characteristics and Certifications

BEES Online 2.0 has added a feature to filter/restrict products selected based on product characteristics, such as fraction recycled materials, and product certifications, such as USDA Certified Biobased. The current list of characteristics and certifications provided in BEES 2.0 are listed in Table 9-2.

Table 9-2 Exterior Wall and Ceiling Finish Characteristics and Certifications

Characteristics and Certifications	
Federal Agency Certifications	None
Standard Certification	None
NGO Certification	None
Characteristics	25 % Recycled Content
	35 % Recycled Content
	50 % Recycled Content
	75 % Recycled Content

9.3 Partition Installation, Service Life, and Use Phase

To evaluate the life cycle impacts of interior wall finishes, it is necessary to consider the installation and use phase impacts, both of which could vary depending on decisions outside the product manufacturer's control. It is assumed there are no use phase impacts while installation impacts are incorporated into the products' embodied impacts. The default assumed service life is defined for each BEES product in its associated documentation.

9.4 Average North American Gypsum Wallboard

Gypsum wallboard (GWB), also known as “drywall” or “plaster board,” consists of a core of gypsum surrounded by a paper covering. Several varieties of GWB products are available; each is comprised of a specially formulated gypsum plaster mix and facing paper specifically developed for the intended application. These gypsum board products include regular GWB, moisture-resistant gypsum board, and Type X fire-resistant gypsum board.

9.4.1 Product Description

For BEES, two of the most common GWB products – ½” (12.7 mm) Regular and 5/8” (15.9 mm) Type X – are studied. Industry average North American data were used; the cradle-to-gate data for these products is based on a 2011 industry-wide study undertaken by the Gypsum Association (GA) and its member companies (Bushi & Meil, 2011). As such the industry average use of natural and synthetic gypsums were included. The ½” Regular and 5/8” Type X GWB have a finished density of 7.66 and 10.84 kg/m² (1.57 lb/ft² and 2.22 lb/ft²), respectively (including 3.3 % MC). These products are installed with joint tape, joint treatment compound, and wallboard screws. GWB is assumed to be screwed to wood studs, 41 cm (16 in) on center. A functional unit of 92.9 m² (1000 ft², or MSF) of GWB used in a building for 60 years has been modeled.

9.4.2 Flow Diagram

The flow diagram in Figure 9-1 presents the major elements of the production of this product as it is currently modeled for BEES.

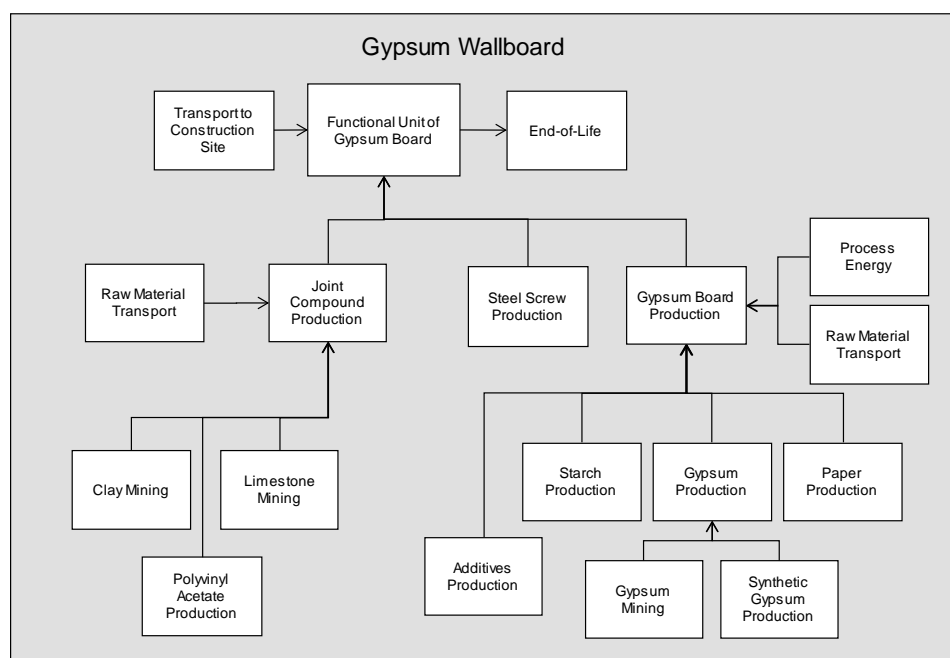


Figure 9-1 Gypsum Board System Boundaries

9.4.3 Raw Materials

GWB primarily consists of gypsum that is mixed with additives and water and backed on both sides with gypsum paper. Gypsum sources include natural gypsum that is quarried or mined, synthetic gypsum resulting from the flue gas desulfurization (FGD) process required for SO₂ scrubbing during coal fired power production, and a smaller amount of PC gypsum material. Table 9-3 shows the materials used in producing one MSF of each product.

Table 9-3 GWB Inputs per MSF⁹⁵

<i>Constituent</i>	<i>1/2" Regular</i>	<i>5/8" Type X</i>
	<i>kg (lb)</i>	<i>kg (lb)</i>
Gypsum material	672 (1 482)	961 (2 118)
<ul style="list-style-type: none"> • Natural (ore) • Synthetic (FGD) • Post-consumer (PC) 	<p style="text-align: center;">41 %</p> <p style="text-align: center;">57 %</p> <p style="text-align: center;">2 %</p>	<p style="text-align: center;">41 %</p> <p style="text-align: center;">57 %</p> <p style="text-align: center;">2 %</p>
Gypsum paper	20.3 (44.8)	20.2 (44.6)
Additives	13.5 (29.8)	16.6 (36.7)
Water	427 (942)	595 (1 312)

Primary data for natural gypsum extraction were collected for Bushi and Meil (2011) from six gypsum quarries and one mine site covering the U.S., Canada, and Mexico for the reference year 2010. Synthetic gypsum, produced as a co-product from coal-fired power production, was modeled using system expansion to avoid allocation of the “multi-functionality” of coal-fired power generation. FGD gypsum generally undergoes additional secondary drying at the GWB plant; energy for drying is included in the model. PC gypsum data included its collection and use. The data for facing and backing gypsum papers, which are made up of recycled paper sources and additives, comes from primary data for the year 2010 from three gypsum paper plants. Additives include starch, vermiculite, fiberglass, dispersant, retarder, potassium sulfate, dextrose, clay (kaolin), boric acid, land plaster, foaming agent (soap), BM accelerator, ammonium sulfate, edge paste, and shredded paper. Data used for BEES are consistent with data used in the GWB study and include data from U.S. LCI Database and ecoinvent customized to U.S. conditions.

9.4.4 Manufacturing

Gypsum board is produced using partially dehydrated or calcinated gypsum. The gypsum is fed into a mixer where it is combined with water and other ingredients to form a slurry or paste. The slurry is spread onto a moving belt of face paper and then covered with a backing paper. As the materials move down the production line, the edges of the face

⁹⁵ Bushi and Meil (2011)

paper are folded over the backing paper to create one of several edge types. The board then progresses down the production line where it is cut into specific lengths. The individual boards are subsequently run through dryers. Once dry, the wallboard moves further down the line where it is trimmed to an exact length, paired with another board, bound on both ends with a labeling tape, and stacked in a bundle. The bundles are taken into the warehouse, where they are selected for shipment to customers. Primary data on GWB manufacturing were collected for Bushi and Meil (2011). Seventeen GWB facilities in the U.S. provided total production 2010 data, including material and energy inputs and process emissions.

Energy use and outflows. Energy used for manufacturing and reported by GWB manufacturers include natural gas used for the drying process, plus electricity, diesel fuel, propane, and gasoline. Manufacturers also reported non-combustion (i.e., process-related) air emissions (including particulate matter and VOCs) and water effluents. These inputs and outputs are included in the model but quantities per MSF are not presented here as the data are proprietary. According to Bushi and Meil (2011), on average, for every MSF of GWB product manufactured, about 0.4 % of all material inputs end up as solid waste. This waste is included in the model, including its deposition in a landfill.

Packaging. Packaging of GWB has been included in the model and is described in the industry-average GWB Type X EPD as “gypsum board end tape (bundling tape) constructed of paper and containing water- and oil-based ink; banding, rail bags and slip sheets; cardboard and metal edge/corner protectors; risers/spacers constructed of gypsum board; and adhesive for risers/spacers” (GA, 2014). Specific materials and quantities were obtained from Bushi and Meil (2011), and data for these materials come fromecoinvent customized to U.S. conditions.

Transportation. The transportation of the gypsum, gypsum paper, and additives to the gypsum board facility has been considered in the models. Transportation data were obtained from Bushi and Meil (2011) and include weighted averages of distances and modes of transportation to manufacturers.

9.4.5 Transportation

The participating GWB manufacturers for Bushi and Meil (2011) provided transportation distances and modes to building sites, as shown in Table 9-4.

Table 9-4 Industry-Average Distances to Building Site⁹⁶

<i>Mode of Transport</i>	<i>Regular ½ in</i>	<i>Type X 5/8 in</i>
Rail - km (mi)	211 (131)	214 (133)
Diesel truck - km (mi)	449 (279)	286 (178)
Barge - km (mi)	331 (206)	331 (206)

⁹⁶ Bushi and Meil (2011), Table 11.

Transportation data sets are based on U.S. LCI database. While the above data were used in the model, BEES users may input their own transportation distance.

9.4.6 Use

Gypsum board is assumed to have a useful life of 75 years, provided it is well maintained and protected. There are no emissions from the use of gypsum board and repairs required to patch holes or tears are not included in the product system boundaries.

9.4.7 Installation

Gypsum board may be attached to wood framing, cold-formed steel framing, or existing surfaces using nails, staples, screws, and adhesives appropriate for the application. Joints between gypsum boards may be sealed or finished using paper or glass fiber mesh and one or more layers of joint treatment compound. Joint treatment compound is available in ready-mixed or dry powder form. BEES assumes ready mixed, which is usually a vinyl-based, ready-to-use product that contains limestone to provide body. Clay, mica, talc, or perlite are often used as fillers. Ethylene glycol is used as an extender, and antibacterial and anti-fungal agents are also included.

The quantity of joint compound used per MSF was calculated using the PCR for joint compound (UL, 2016). The PCR stipulates a volume of 38.2 liters (10.1 gal) per MSF. For a conventional weight Ready Mixed joint compound with a shrinkage value of 19.2 % and default installation waste factor of 3 % (Drywall Finishing Council, 2017), the volume of joint compound is 48.8 liters (12.9 gallons) per MSF. At a typical density of 1.64 kg/liter (13.7 lb/gal), the required weight of Ready Mixed joint compound is 80.3 kg (177 lb). The joint compound in BEES was modeled based on an MSDS for an all-purpose joint compound. Water and limestone make up the bulk of the volume, with smaller amounts of vinyl acetate polymer, bentonite, and sand. These production data come fromecoinvent.

GWB is modeled as fastened using screw type fasteners at 61 cm (24 in) on center. The Gypsum Construction Handbook was consulted for data on the fasteners and spacing (USG Corporation, 2014). For 1 MSF, assuming 41 cm (16 in) spacing between screws, 375 screws are needed. A mass of 1.448 g (3.2 E-3 lb) per screw amounts to 0.543 kg (1.2 lb) screws per MSF.

Wallboard installation waste is approximated at 10% and is modeled as being disposed of in a landfill. This value is a conservative modeling decision, but it should be acknowledged that this waste could also be sent to a gypsum recycler who will either provide the clean scrap to a gypsum board manufacturer or process the clean scrap for agricultural use.

9.4.8 End of Life

While gypsum board could be recycled at end of life, the product is modeled as disposed of in a landfill. End of life modeling includes transportation of the GWB and installation materials by heavy-duty diesel-fuel powered truck approximately 48 km (30 mi) to a landfill, plus impacts of the materials in a landfill. Truck transportation is based on the U.S. LCI database and disposal in a landfill is modeled based onecoinvent end of life waste management process data.

10 Wall Sheathing Category (Under Development)

Under Development.

11 Roof Sheathing Category (Under Development)

Under Development.

12 Roof Coverings Category (Under Development)

Under Development.

13 Parking Lot Paving Category (Under Development)

Under Development.

14 Beams Category (Under Development)

Under Development.

15 Columns Category (Under Development)

Under Development.

16 Basement Walls Category (Under Development)

Under Development.

17 Slab on Grade Category (Under Development)

Under Development.

18 Software Development and Design

BEES is a data-driven web application that enables access to a NIST-developed building product database based on building product cost and LCA results as described in previous sections of this report. Comparisons of life cycle costs and environmental impacts for similar building products can be evaluated using the data visualization features in the application. Technologies were selected for this project based on their utility in developing this comprehensive system. A summary of each technology is described below.

18.1 Database

18.1.1 Database Management – Sql Server

Microsoft Sql Server relational database management system is used to store the BEES building product database.

18.1.2 Database Development – SimaPro and Excel

Development of the BEES database includes two steps. First, LCA software (SimaPro) is used to generate the LCIA results for each BEES building product. Second, the product characteristics, cost data, and LCIA results are manually compiled into source data tables in a spreadsheet format (Excel). These source data tables are pulled into the BEES application in CSV format.

18.2 Application

18.2.1 Software Programming Language – C#

C# is an object-oriented programming language developed by Microsoft. It is based on the C++ programming language, has many similarities with Java, and was developed to work with the .Net framework. C# is used primarily for developing the server-side code of BEES Online 2.0, including modules to process results data for visualization and data retrieval.

18.2.2 Software Framework - .NET

The .Net Framework is a Microsoft developed framework, which contains the common language runtime, in addition to several common class libraries. The common language runtime can be thought of as the foundation of the framework that manages processes at execution time. BEES targets the .Net Framework version 4.5.

18.2.3 Web Development Technologies – HTML, CSS, JavaScript, JQuery, jqChart

Several web technologies were used in the creation of the user interface. Hypertext Markup Language (HTML) is the primary language used for displaying web content. Cascading Style Sheet (CSS) is the definition file used by web pages for formatting.

JavaScript is a light-weight scripting language used to programmatically manipulate the input, output or display of a web page. JQuery is a JavaScript library that facilitates Document Object Model (DOM) manipulation and simplifies partial web page data refreshing through asynchronous JavaScript and XML (AJAX) requests. jqChart is a html5 charting library used to render charts based on the data for specific comparisons in BEES Online 2.0.

18.2.4 Application Design – Visual Studio

The BEES application is developed using Visual Studio’s MVC 5 project template with the “database first method.” Model, view, and controller functions are all placed in different code files to keep each entity separate. The general flow of the application can be seen in Figure 18-1. A user makes a request through the browser. The controller gets the request and passes the request parameters to the model, which retrieves necessary data from the database. The model passes back the data, which is merged with the view and then passed back to the browser by the controller.

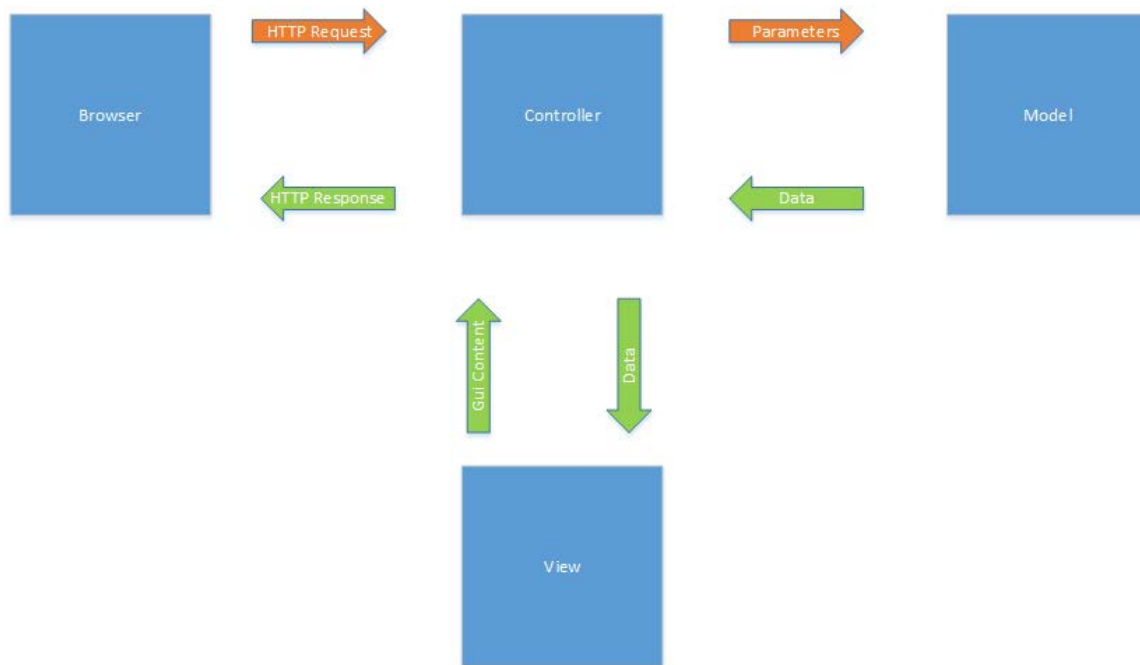


Figure 18-1 Application Information Flow

In developing the BEES application, the database first method is used because the BEES database had been developed prior to development of the user interface module. The software model containing seven data tables was created based on the database.

Controller methods were then developed to retrieve data based on specific parameters from the model, which was then combined with the view and passed back to the browser to be displayed to the user. Comparison results are displayed by the chart module, which contains functions for ordering, formatting, and displaying data visually. The capability

to download the data in a .csv file is included so that data can be analyzed by the user according to their preferences.

This publication is available free of charge from: <https://doi.org/10.6028/NIST.TN.2032>

19 Limitations and Future Research

Properly interpreting the BEES environmental performance results requires placing them in perspective. The BEES LCAs use selected inventory flows converted to selected local, regional, and global environmental impacts to assess environmental performance. Those inventory flows which currently do not have scientifically proven or quantifiable impacts on the environment are excluded, such as mineral extraction and wood harvesting, which are qualitatively thought to lead to loss of habitat and an accompanying loss of biodiversity. Any new or improved data and/or modeling approaches should be brought into the interpretation of the BEES results.

The Environmental Problems approach that BEES uses for impact assessment does not offer the same degree of relevance for all environmental impacts. For global and regional effects (e.g., climate change and acidification) the method may result in an accurate description of the potential impact. For impacts dependent upon local conditions (e.g., smog, ecological toxicity, and human health impacts) it may result in an oversimplification of the actual impacts because the indices are not tailored to localities.

During the interpretation step of the BEES LCAs, environmental impact results are optionally combined into a single environmental performance score using relative importance weights. These weights necessarily incorporate values and subjectivity. BEES users should routinely test the effects on the environmental impact scores of changes in the set of importance weights by completing their analysis with more than one weighting approach.

Life cycle impact assessment is a rapidly evolving science. Assessment methods unheard of a decade ago have since been developed and are now being used routinely in LCAs. While BEES incorporates state-of-the-art impact assessment methods, the science will continue to evolve and methods in use today – particularly those for land and water use – are likely to change and improve over time. Future versions of BEES should incorporate these improved methods as they become available.

At this time BEES does not include formal uncertainty analysis. Uncertainty exists throughout all levels of LCA, from the background data to impact characterization to normalization factors. NIST is evaluating the inclusion of uncertainty analysis into future releases of BEES.

The BEES overall performance scores do not represent absolute performance. Rather, they represent proportional differences in performance, or relative performance, among competing alternatives. Consequently, the overall performance score for a given product alternative can change if one or more competing alternatives are added to or removed from the set of alternatives under consideration. In rare instances, rank reversal, or a reordering of scores, is possible. Finally, since they are relative performance scores, no conclusions may be drawn by comparing overall scores across building elements. For example, if exterior wall finish Product A has an overall performance score of 30, and roof covering Product D has an overall performance score of 20, Product D does not

necessarily perform better than Product A (keeping in mind that lower performance scores are better). This limitation does not apply to comparing environmental performance scores across building elements.

There are inherent limits to comparing product alternatives without reference to the whole building design context. Such comparisons may overlook important environmental and cost interactions among building elements. For example, the useful life of one building element (e.g., floor coverings), which influences both its environmental and economic performance scores, may depend on the selection of related building elements (e.g., subflooring). There is no substitute for good building design. Environmental and economic performance are but two attributes of building product performance. The BEES model assumes that competing product alternatives all meet minimum technical performance requirements. However, there may be significant differences in technical performance, such as acoustic or fire performance, which may outweigh environmental and economic considerations.

References

- AA. (2013). *The Environmental Footprint of Semi-Finished Aluminum Products in North America, A Life Cycle Assessment Report*. Retrieved from Washington, DC, December 2013:
- Alberini, A., & Chiabai, A. (2007). Discount Rates in Risk Versus Money and Money Versus Money Tradeoffs. *Risk Analysis*, 27(2), 483-498. doi:<https://doi.org/10.1111/j.1539-6924.2007.00899.x>
- Alioth. (2018). \$1,000 in 2007 → 2018 | Inflation Calculator. U.S. Official Inflation Data.
- Armstrong. (2014a). *Environmental Product Declaration - Vinyl Composition Tile*. Retrieved from
- Armstrong. (2014b). *Environmental Product Declaration - Linoleum*. Retrieved from
- Armstrong. (2014c). *Environmental Product Declaration - BioBased Tile*. Retrieved from
- ASTM. (2011). *Standard Practice for Applying the Analytic Hierarchy Process Multiattribute Decision Analysis of Investments Related to Buildings and Building Systems, ASTM Designation E1765-11*. Retrieved from West Conshohocken, PA:
- ASTM. (2014). *Asphalt Shingles, Built-up Asphalt Membrane Roofing and Modified Bituminous Membrane Roofing*. Retrieved from West Conshohocken, PA:
- ASTM. (2015). *Standard Practice for Measuring Life-Cycle Costs of Buildings and Building Systems, ASTM Designation E917-15*. Retrieved from West Conshohocken, PA:
- ASTM. (2015e). *Standard Classification for Building Elements and Related Sitework— UNIFORMAT II, ASTM Designation E1557 – 09*. Retrieved from West Conshohocken, PA:
- ASTM. (2016). *Standard Practice for Applying Analytical Hierarchy Process (AHP) to Multiattribute Decision Analysis of Investments Related to Projects, Products, and Processes, ASTM Designation E1765-16*. Retrieved from West Conshohocken, PA:
- ASTM. (2017). *Standard Practice for Measuring Life-Cycle Costs of Buildings and Building Systems, ASTM Designation E917 – 17*. Retrieved from West Conshohocken, PA:
- Athena. (2010). *A Gate-to-Gate Life Cycle Assessment of Canadian Pre-finished Solid Strip Hardwood Flooring; Drying, Milling and Finishing Unit Process Data and Assessment*. Retrieved from Performed for FP Innovations, Forintek Division (Quebec):
- Bare, J. (2012). *User's Manual: Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI) version 2.1*. Retrieved from
- Bare, J., Gloria, T., & Norris, G. (2006). Development of the method and US normalization database for life cycle impact assessment and sustainability metrics. *Environmental science & technology*, 40(16), 5108-5115.
- Bare, J., Young, D., QAM, S., Hopton, M., & Chief, S. A. B. (2012). *Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI)*.
- Bergman, R. D., & Bowe, S. A. (2011). *CORRIM Final Report, Module N, Life-Cycle Inventory of Manufacturing Prefinished Engineered Wood Flooring in the Eastern United States, Section 1.2*. Retrieved from
- Boulay, A., Bare, J., Benini, L. et al. (2018). *Int J Life Cycle Assess*, 23(368). doi:<https://doi.org/10.1007/s11367-017-1333-8>
- Brick Industry Association. (2009). *The Bottom Line on Brick's Role in Sustainability and Green Building Design*. Retrieved from Found at: www.gobrick.com/Resources/Publications/Brick-In-Home-Building:
- Brick Industry Association. (2017). *The 2016 Brick Industry Association Annual Report 2016*. Retrieved from
- Bushi, L., & Meil, J. (2011). *A Cradle-to-Gate Life Cycle Assessment of ½" Regular and 5/8" Type X Gypsum Wallboard*. Retrieved from

- Cameron, T., & Gerdes, G. (2002). *Eliciting Individual-Specific Discount Rates*. Paper presented at the Second World Congress of Environmental and Resource Economists, Monterey, CA.
- CARB. (2018). California Air Resource Board - Auction Information - Summary of Auction Settlement Prices and Results August 2018
- CDP. (2016). *Embedding a carbon price into business strategy*. Retrieved from https://b8f65cb373b1b7b15feb-c70d8ead6ced550b4d987d7c03fcdd1d.ssl.cf3.rackcdn.com/cms/reports/documents/00/001/132/original/CDP_Carbon_Price_2016_Report.pdf?1474269757:
- CertainTeed. (2013). *Environmental Product Declaration for Sustainable Insulation Unfaced and Kraft Faced Batts*. Retrieved from
- CIA. (2018). The World Factbook - Geography: US - Area: Land.
- CRI. (2014). *Carpet Maintenance Guidelines for Commercial Applications*. Retrieved from <http://carpet-rug.com/commercial-customers/cleaning-and-maintenance/index.cfm>:
- Drywall Finishing Council. (2017). *Environmental Product Declaration for Joint Compound*. Retrieved from
- Ducker. (2008). *2008 Industry Sustainability Summary Report – Plant Averages*. Retrieved from
- Ecoinvent. (2017). Ecoinvent life cycle assessment data v3. Retrieved from <http://www.ecoinvent.org/database/>
- EIA. (2018). Table 1.1 Primary Energy Overview. *Monthly Energy Review - September 2018*.
- Environmental Protection Agency. (2018). Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI) 2.1.
- EPA. (1993). *Life Cycle Assessment: Inventory Guidelines and Principles*. Retrieved from
- EPA. (1997). *Brick and Structural Clay Product Manufacturing Volume I: Section 11.3, AP-42: Compilation of Air Pollutant Emission Factors*. Retrieved from Found at: <http://www.epa.gov/ttn/chief/ap42/ch11/final/c11s03.pdf>:
- European Commission. (2003). *Integrated Pollution Prevention and Control (IPPC): Best Available Techniques for the Textile Industry*. Retrieved from
- Fantke, P. E., Bijster, M., Guignard, C., Hauschild, M., Huijbregts, M., Jolliet, O., Kounina, A., Magaud, V., Margni, M., McKone, T.E., Posthuma, L., Rosenbaum, R.K., van de Meent, D., van Zelm, R. (2017). *USEtox® 2.0 Documentation (Version 1)*. Retrieved from <http://usetox.org>:
- Forbo. (2013a). *Environmental Product Declaration - Marmoleum 2.0 and 2.5mm Resilient Floor Covering*. Retrieved from <https://www.forbo.com/flooring/en-au/environment/green-star/epd-s-environmental-product-declarations/p7m6me>:
- Forbo. (2013b). *Environmental Product Declaration - Eternal Resilient Heterogenous Vinyl Floor Covering*. Retrieved from <https://www.forbo.com/flooring/en-au/environment/green-star/epd-s-environmental-product-declarations/p7m6me>:
- FPIinnovations. (2013). *Product Category Rules for North American Gypsum Boards*. Retrieved from
- FPIinnovations. (2015). *Product Category Rules for North American Structural and Architectural Wood Products*. Retrieved from
- FPIinnovations. (2017). *Life Cycle Assessment of Western Red Cedar Decking, Siding, and Alternative Products*. Retrieved from
- Franklin Associates. (2010). *Life Cycle Inventory of 100% Post-Consumer HDPE and PET Recycled Resin from Post-Consumer Containers and Packaging* Retrieved from
- Frischknecht, R. J., N.; Althaus, H.J.; Doka, G.; Dones, R.; Hischer, R.; Hellweg, S.; Humbert, S.; Margni, M.; Nemecek, T.; Spielmann, M. (2007). *Implementation of Life Cycle Impact*

- Assessment Methods: Data v2.0. ecoinvent report No. 3.* Retrieved from Dübendorf, Switzerland:
- Fuller, S., & Petersen, S. (1996). Life-Cycle Costing Manual for the Federal Energy Management Program, 1995 Edition. *NIST handbook 135*.
- GA. (2014). *Environmental Product Declaration for Typical (5/8" Type X) North American Gypsum Boards*. Retrieved from
- Gloria, T. P., Lippiatt, B. C., & Cooper, J. (2007). Life-Cycle Impact Assessment Weights to Support Environmentally Preferable Purchasing in the United States. *Environmental science & technology*, 41(21), 7551-7557.
- Green Seal. (2011b). *GS-43 GREEN SEAL™ Standard for Recycled Latex Paint. First ed.* Retrieved from Washington, DC.:
- Hosking, J. (2012). *Recommended Size for Flooring Staples / Nails*". Retrieved from retrieved at <http://www.hoskinghardwood.com>:
- Hubbard, S., & Bowe, S. (2008). *CORRIM: Phase II Final Report, Life-Cycle Inventory of Solid Strip Hardwood Flooring in the Eastern United States*. Retrieved from
- Huijbregts, M. A. J., Steinmann, Z. J. N., Elshout, P. M. F., Stam, G., Verones, F., Vieira, M., . . . Zelm, R. v. (2017). ReCiPe2016: a harmonised life cycle impact assessment method at midpoint and endpoint level. *Int J Life Cycle Assess*, 22(138).
- International Organization for Standardization (ISO). (2006a). Environmental Management -- Life-Cycle Assessment -- Principles and Framework, International Standard 14040.
- International Organization for Standardization (ISO). (2006b). Environmental Management -- Life-Cycle Assessment -- Principles and Framework, International Standard 14044.
- IPCC. (2013). *Climate Change 2013, The Physical Science Basis*. Retrieved from <http://www.climatechange2013.org>:
- Lavappa, P., & Kneifel, J. (2018). *Energy Price Indices and Discount Factors for Life-Cycle Cost Analysis - 2018, Annual Supplement to NIST Handbook 135*. (NISTIR 85-3273-33).
- Levin, L. (1996). *Best Sustainable Indoor Air Quality Practices in Commercial Buildings*. Paper presented at the Third International Green Building Conference and Exposition - 1996, Gaithersburg, MD.
- Lippiatt, B. (2007). *BEES 4.0: Building for Environmental and Economic Sustainability Technical Manual and User Guide*. Retrieved from
- Lu, D., Overcash, M., & Realff, M. (2008). *Care and Maintenance of Commercial Carpet Conventional and Next Generation Technology: Contents Of Use Phase Gate To Gate; Life Cycle Inventory Summary*. Retrieved from
- Mahalle, L. (2011). *A Comparative Life Cycle Assessment of Canadian Hardwood Flooring with Alternative Flooring Types*. Retrieved from
- Moore, M., & Viscusi, W. (1990). Models for estimating discount rates for long-term health risks using labor market data. *Journal of Risk and Uncertainty*, 3(4), 381-401.
- NAIMA. (2013a). *EPD for Light and Heavy Density Mineral Wool Board*. Retrieved from
- NAIMA. (2013b). *EPD for Mineral Wool Loose Fill*. Retrieved from
- NAPA. (2017). *Product Category Rules (PCR) For Asphalt Mixtures*. Retrieved from <http://www.asphalt pavement.org/EPD>:
- NAS. (2017). *Valuing Climate Damages: Updating Estimation of the Social Cost of Carbon Dioxide*. Retrieved from <http://nap.edu/24651>:
- National Institute of Standards and Technology (NIST). (2010). Building for Environmental and Economic Sustainability (BEES) Online Software. Retrieved from [http://ws680.nist.gov/Bees/\(A\(fStnHf6r0QEkAAAAAYmY5MzY4YWYtZTQ2Yi00NDk0LTk2QDltNjcxOTk2NTIxNGQ2Z0c0W65aCyEnzYI8zFbw-aGALRo1\)\)/Default.aspx](http://ws680.nist.gov/Bees/(A(fStnHf6r0QEkAAAAAYmY5MzY4YWYtZTQ2Yi00NDk0LTk2QDltNjcxOTk2NTIxNGQ2Z0c0W65aCyEnzYI8zFbw-aGALRo1))/Default.aspx)

- National Renewable Energy Laboratory (NREL). (2012). U.S. Life-Cycle Inventory Database (LCI). Retrieved from <http://www.nrel.gov/lci/>
- NSF International. (2014). *Flooring: Carpet, Resilient, Laminate, Ceramic, Wood Version 2*. Retrieved from
- NSF International. (2017). *Architectural Coatings*. Retrieved from https://standards.nsf.org/apps/group_public/download.php/28098/ACA%20PCR%20%2006-17-15%20-%20Final.pdf
- OIRA. (2011). *Regulatory Impact Analysis: A Primer*. https://obamawhitehouse.archives.gov/sites/default/files/omb/inforeg/regpol/circular-a-4_regulatory-impact-analysis-a-primer.pdf: Office of Information and Regulatory Affairs.
- OMB. (1992). *GUIDELINES AND DISCOUNT RATES FOR BENEFIT-COST ANALYSIS OF FEDERAL PROGRAMS*.
- OMB. (2003). *Circular A-4*. <https://www.whitehouse.gov/sites/whitehouse.gov/files/omb/circulars/A4/a-4.pdf>.
- OMB. (2017). *Report of the President's Economic Advisors , Analytical Perspectives*. Retrieved from
- ORNL. (2012). *Measure Guideline: Transitioning to Three Coat Stucco to One Coat Stucco with EPS*. Retrieved from Oak Ridge, TN:
- Owens Corning. (2013a). *Environmental Product Declaration for EcoTouch Kraft-Faced Insulation*. Retrieved from
- Owens Corning. (2013b). *Environmental Product Declaration for Unbonded Loosefill*. Retrieved from
- PAC-CLAD. (2015). *Environmental Product Declaration for Roll Formed Steel and Aluminum Panels*. Retrieved from
- Paint Product Stewardship Initiative. (2006). *Life Cycle Assessment Results for Six "Pure" Methods for Managing Leftover Paint. Draft Report*. Retrieved from For more information, go to <http://www.productstewardship.us>:
- PCA. (2016a). *Environmental Product Declaration for Portland Cements*. Retrieved from ASTM International, West Conshohocken, PA:
- PCA. (2016b). *Environmental Product Declaration for Masonry Cements*. Retrieved from ASTM International, West Conshohocken, PA:
- PE International. (2013). *CONCRETE*. Retrieved from
- PRe Sustainability. (2018). SimaPro. Retrieved from <https://simapro.com/>
- PricewaterhouseCoopers/Ecobilan. (2001). *Eco-profile of high-volume commodity phthalate esters (DEHP/DINP/DIDP)*. Retrieved from
- RFCl. (2013a). *Environmental Product Declaration - Vinyl Composite Tile*. Retrieved from <https://rfci.com/environmental-product-declaration/>:
- RFCl. (2013b). *Environmental Product Declaration - Homogenous Vinyl Flooring*. Retrieved from <https://rfci.com/environmental-product-declaration/>:
- RGGI. (2018). The Regional Greenhouse Gas Initiative - Auction Results
- Rosenbaum, R. K. e. a. (2008). USEtox—the UNEP-SETAC toxicity model: recommended characterisation factors for human toxicity and freshwater ecotoxicity in life cycle impact assessment. *International Journal of Life Cycle Assessment*, 13, 532-546.
- Ryberg, M., et al.;. (2014). Updated US and Canadian normalization factors for TRACI 2.1. *Clean Techn Environ Policy*, 16(329). doi:<https://doi.org/10.1007/s10098-013-0629-z>
- Sandbag. (2018). European Union Allowance (EUA) Price - April 2008 to September 2018.
- AVAQMD Rule #1168 Adhesive and Sealant Applications, (2011).

- Scharff, R., & Viscusi, W. (2011). *Economic Inquiry*, 49(4), 959-972.
doi:<https://doi.org/10.1111/j.1465-7295.2009.00191.x>
- Subramanian, V., Ingwersen, W., Hensler, C., & Collie, H. (2012). Comparing product category rules from different programs: learned outcomes towards global alignment. *The International Journal of Life Cycle Assessment*, 17(7), 892-903.
- Sustainable Solutions Corporation. (2016). *Vinyl, Insulated Vinyl, and Polypropylene Siding Life Cycle Assessment* Retrieved from (Royersford, PA, July 2016)
- TCNA. (2014). *Environmental Product Declaration - Ceramic Tile*. Retrieved from <https://www.tcnatile.com/images/pdfs/EPD-for-Ceramic-Tile-Made-in-North-America.pdf>:
- U.S. EPA Science Advisory Board. (1990). Reducing Risk: Setting Priorities and Strategies for Environmental Protection, SAB-EC-90-021. Washington, DC.
- U.S. EPA Science Advisory Board. (2000). Toward Integrated Environmental Decision-Making, EPA-SAB-EC-00-011. Washington, DC.
- U.S. Green Building Council. (2018). Building product disclosure and optimization - environmental product declarations. *Leadership in Energy and Environmental Design (LEED) Building Design + Construction (BD+C): New Construction | v4*. Retrieved from <https://www.usgbc.org>
- UL. (2016). *PCR Guidance for Building-Related Products and Services: Part B: Joint Compound EPD Requirements*. Retrieved from
- UL. (2018). Environment - Environmental Product Declarations.
- UL Environment. (2013a). *Environmental Product Declaration - North American softwood plywood*. Retrieved from
- UL Environment. (2015). *Cladding System Products*. Retrieved from www.ul.com/businesses/environment:
- UL Environment. (2018a). *Part A: Life Cycle Assessment Calculation Rules and Report Requirements*. Retrieved from www.ul.com/businesses/environment:
- UL Environment. (2018b). *Part B: Building Envelope Thermal Insulation EPD Requirements*. Retrieved from www.ul.com/businesses/environment:
- US Census. (2018). United States Census - QuickFacts - UNITED STATES - Population, Census, April 1, 2010.
- USG Corporation. (2014). *The Gypsum Construction Handbook, 7th Ed.* . Retrieved from Wiley, March 2014
- USGS. (2018). *Estimated Use of Water in the United States in 2015*. Retrieved from Water Availability and Use Science Program:
- Warner, J., & Pleeter, S. (2001). The Personal Discount Rate: Evidence from Military Downsizing Programs. *The American Economic Review*, 91(1), 33-53.
- Working Group on Social Cost of Carbon, I. (2016). *Technical Support Document: Technical Update of the Social Cost of Carbon for Regulatory Impact Analysis Under Executive Order 12866*. Retrieved from
- World Bank. (2018). Carbon Pricing Dashboard.
- World Bank Group. (2018). *State and Trends of Carbon Pricing 2018*. Retrieved from <https://openknowledge.worldbank.org/bitstream/handle/10986/29687/9781464812927.pdf?sequence=5&isAllowed=y>:
- Wright, S., Smithers, A., Warburton, P., Pepper, G., Goldberg, J., Brodie, H., . . . Napier, R. (2011). *Practical History of Financial Markets*. Retrieved from

<https://www.ebsglobal.net/EBS/media/EBS/PDFs/Practical-History-Financial-Markets-Course-Taster.pdf>:

This publication is available free of charge from: <https://doi.org/10.6028/NIST.TN.2032>